The Macroeconomic Limits of AI Compute: A Vintage Fermi Model of Capital Carry, Sectoral Demand, and the Growth Rate the Build-Out Requires

Desmond Fitzpatrick, Ph.D.
Founder, Nvara.ai
Retired, IBM Systems
desmond.fitzpatrick@nvara.ai desmond.fitzpatrick@gmail.com
ORCID: https://orcid.org/0009-0001-0534-2793

29 October 2026 — Version 28, the post-earnings rebuild. *What changed since version 27 is listed on page 4. Nvidia (19 November), Oracle (December) and Anthropic's amended S-1 enter as version 28.1; see Appendix H.*

Abstract

- **The question.** Five companies — Microsoft, Alphabet, Amazon, Meta and Oracle — are spending about $780B this year on AI data centers, up from $448B in 2025 [1,2]. Will the revenue arrive fast enough to pay for them?
- **The method.** A Fermi estimate: the answer is built from many small, bounded, sourced factors, and the uncertainty in each is carried through to the result. Every input sits in a public register anyone can change.
- **The cost.** The buildings and chips cost about $725B a year to carry by 2030 — wear, running costs and a return on the money — even if spending merely stays flat, because each year's spending is still on the books when the next arrives.
- **The revenue.** AI revenue in 2026 is about $179B. To cover the cost by 2030 it must grow about 49% a year, every year.
- **What the sectors deliver.** Counted sector by sector — fifteen of them, each with its own ceiling — it grows about 33% a year, and only $480–490B of it reaches the owners of the data centers.
- **The gap.** The most likely outcome is a shortfall of about $260B a year in 2030, more than three standard deviations from break-even; more if spending keeps rising as the companies now say it will. 2027–28 is a loss on every path.

- **A sixth builder.** Musk's SpaceX/xAI now spends at hyperscaler scale (about $75B on AI in 2026). Its rent from Anthropic was already counted; its costs were not. Added, they widen the 2030 shortfall to about $345B, or $425B at its current pace.
- **How long investors wait.** Even on the best path — spending cut back to follow the revenue that actually arrives — the money earns an ordinary return (about 9.5% a year), counting the early losses, only in 2034–35, eight to nine years from now.

  On a flat path it has averaged about 1% a year by 2035. If spending keeps rising, it loses money on average every year to 2035. And the losses are not free: they are paid for by borrowing (Alphabet's long-term debt rose from $21.6B to $125.1B in a year [127]) or by giving up other earnings, so the hole grows with interest.

  In today's money it is worse: after inflation (about 2.6% a year) flat spending is still losing about 1.6% a year on average in 2035, while fixed-price contracts lose value and power and labor costs rise.
- **What would prove it wrong.** AI revenue above $400B in calendar 2028. This is a probability assessment, not a forecast.
- **Why growth slows.** Time saved is not money saved; checking AI's work takes time; much of the value goes to buyers and integrators rather than the cloud; countries carve out their own clouds; and the grid and local consent hold projects back.
- **The way out.** Not a crash: spending that tracks the revenue actually booked turns profitable around 2031. A flat path does not recover by 2035; an arms race never does.
- **Cross-checks.** Goldman Sachs's September 2026 framework needs 27 cents of revenue a year per dollar of capital; this paper's carry is 28. The two differ on scope and on one input, facility operating cost.

Model, data and code are open. Every input is appraised in Appendix G, the update protocol is in Appendix H, and a glossary of terms is in Appendix I.

At a glance	
Method	Fermi estimate: the answer is a chain of bounded factors, and each factor's uncertainty is carried to the result by Monte Carlo simulation (100,000 draws).
Who is counted	The five largest US builders — Microsoft, Alphabet, Amazon, Meta, Oracle. They are about nine-tenths of 2026 spending by the world's nine largest cloud operators; the Chinese four ($50–110B a year) are tracked but kept outside the model [61]. New in v28: SpaceX/xAI, now a sixth builder at about $75B in 2026, is shown alongside the base as a separate overlay (p. 9).
What is tracked	53 inputs in a public register, each with a source, a date and its next update; 15 sector revenue chains; a 2026 revenue base built from 7 components; 19 inputs decomposed into sourced parts; years 2023–2035.
Sources	134 references: about 20 company filings and earnings releases, 2 official statistics (Federal Reserve, BLS), 30 research and data houses (Epoch AI, Goldman Sachs, Gartner, TrendForce and others), 15 academic works, and 60 press reports. Figures that rest on press reports or leaks are marked as such.
Result	About $260B a year short in 2030 if spending stays flat; overturned if 2028 AI revenue exceeds $400B.
The wait	With early losses counted, an ordinary return arrives in 2034–35 at best; about 1% a year by 2035 on a flat path; never by 2035 if spending keeps rising.

Reading guide

1. What is new in version 28 . . . . . p. 4
The headline: what the October earnings changed . . . . . p. 4
What spooked investors: AI and the search business . . . . . p. 5
How long investors wait: the hole, the payback, the return . . . . . p. 5
The sixth builder: SpaceX/xAI, and why it is added . . . . . p. 9
New sources: Anthropic's S-1, cloud growth, Oracle . . . . . p. 10
Accounting changes that make the cost look smaller . . . . . p. 11
Errata: where earlier versions erred . . . . . p. 12
Still waiting on . . . . . p. 12
2. Executive summary — the argument in short points . . . . . p. 13
3. The paper — method, cost, revenue, sectors, results . . . . . p. 17
4. What would prove it wrong . . . . . p. 89
5. Every input, appraised . . . . . p. 106
6. What changed, input by input (delta log) . . . . . p. 116
7. Glossary — every term and abbreviation . . . . . p. 117

Keywords: Fermi estimation, vintage capital model, hyperscale capex, break-even growth, productivity J-curve, surplus capture, ASC 360-10.

What Is New in Version 28 (29 October 2026): the Q3 Earnings

Version 28 is the post-earnings rebuild promised in Appendix H. Every input that moved is listed below with its source; the delta log in Appendix H gives old and new values. Nvidia (19 November) and Oracle (December) report later and will enter as v28.1, with Anthropic's amended S-1 if it is filed by then. An expandable version of this list, with the detail behind each bullet, is in the repository (`CHANGES.md`).

The headline

- **The market asked the paper's question.** On 29 October Alphabet had its worst day as a public company — down nearly 13%, about $480–500B of value [116, 117] — on results in which Google Cloud revenue *doubled*. Investors sold two things: the spending — capex of $51.4B in the quarter, free cash flow of −$9.1B, long-term debt up from $21.6B to $125.1B in a year, and the CFO's statement that "we continue to expect our capex to increase significantly in 2027" [115, 127] — and a slowdown in search advertising (next subsection). Whether the revenue can carry the build-out is now being priced, at the largest scale yet.

- **The result does not move: −$259B/yr in 2030, $z = -3.54$.** Calendar-2026 capex guidance across the five is unchanged in total at ∼$780B. The 2026 revenue base, re-derived from Anthropic's filed financials, is $179B (P10–P90 $168–191B). Break-even growth on a plateau is 49%/yr to 2030; the sector chains still deliver about 33%. Under the re-issue rule the change is *minor* (Appendix H).

- **Flat spending is now the conservative case.** No company guided down. Alphabet ("increase significantly"), Amazon ("spend meaningfully more in 2027"), Meta ("continue investing aggressively") and Microsoft (fiscal-2027 capex to grow, Q2 above $50B) all point up [115, 118, 120, 121]. The street's 2027 figure is about $1.1T [126]. The paper's arms-race path, not its plateau, is the one the companies describe.

What spooked investors: AI and the search business

- **More searches, less money per search.** Google Search revenue grew 12% ($63.4B), down from 17% in the second quarter, in the same quarter that Google said search query growth was the highest in five years [115, 127]. Faster query growth with slower revenue growth means revenue per query grew more slowly, or fell.

  The paper's reading: AI answers are replacing some of the ad-bearing results they sit beside. Analysts called the search slowdown the point that "outweighs all other points in the print" [127].

- **The paper already carries this.** AI enters the revenue base only as an *uplift* to advertising (25 / 40 / 55 $B, Table 8), and the search chain assumes AI answers "defend share rather than expand it", adding only 5–15% of search revenue (Appendix C). If AI answers take revenue from search rather than add to it, the uplift belongs at the low end, and the gap widens.

- **No input changed for it yet.** One quarter is a signal, not a measurement, and the register moves only on a sourced figure. Two more quarters of falling revenue per query would move the advertising uplift to its low end, worth about $15B a year of 2026 base and more by 2030. It is on the watch list for v28.1.

How long investors wait: the hole, the payback, the return

The yearly cost in this paper already includes a return on the money: about 9–10% a year (Appendix G). So "break-even" here means earning an ordinary investor's return, not merely covering costs; a positive cumulative figure means the shortfall in that return has been made up.

Table 1 adds up each year's surplus or deficit from 2027, with revenue growing as the fifteen sector chains say it will (about 33% a year on average to 2030, slowing after).

Table 1: Cumulative surplus (+) or deficit (−) from 2027, by spending path ($B, median, bottom-up revenue, rounded to $10B)

Path	2027	2028	2029	2030	2031	2032	2033	2034	2035
Flat spending (plateau)	−150	−360	−600	−860	−1,080	−1,280	−1,420	−1,520	−1,550
Arms race (street path)	−190	−510	−940	−1,490	−2,070	−2,640	−3,210	−3,750	−4,260
35% cut (rationalize)	−120	−210	−260	−260	−180	−30	+190	+490	+870
Spending tracks revenue	−150	−330	−470	−550	−500	−340	−100	+180	+480

- **Flat spending** digs a hole of about $860B by 2030 and $1.55T by 2035. Each year's loss shrinks, but the hole is never repaid within the horizon.
- **An arms race** — the path the companies now describe — never earns its return: the hole passes $4T by 2035.
- **Cutting back** is the only way the money comes back with a normal return. A 35% cut bottoms out near $260B in 2029–30 and is repaid by 2033. Spending that simply tracks booked revenue bottoms near $550B in 2030 and is repaid by 2034.
- **The losses cost money: interest or lost earnings.** Spending ahead of revenue has to be financed — by borrowing, as Alphabet now is (long-term debt $21.6B → $125.1B in a year [127]), or by giving up earnings the money would have made elsewhere. Either way the hole compounds. Table 3 charges the cost of money (∼9.5% a year) on the losses themselves.
- **The losses are not part of capex.** Capex is the money spent on buildings and chips. The yearly cost above is what that capex costs to hold. The losses are revenue falling short of that cost, and they come out of the owners' profits and cash — lower earnings, then write-downs. With the cost of money charged on them, the deepest point for spending that tracks revenue is about $650B rather than $550B, and payback moves from 2034 to 2035.
- **The return on the money, with the early losses included.** Table 2 gives the average return earned on the money still invested, from 2027 to each year, before tax. An ordinary investor's return is about 9.5%. Spending that tracks revenue passes it around 2034; a 35% cut around 2032–33; flat spending averages about 1% by 2035; an arms race loses money on average every year to 2035.
- **Inflation, counted once.** Over a nine-year wait, inflation matters — but it must not be counted twice.
  - *Already in:* the cost of money (9.45%) is a nominal rate, so it already contains the inflation investors expect. The payback years above therefore stand as they are; deflating them again would double-count. Stated in 2026 dollars, both sides shrink together and the crossover years do not move (Table 3, bottom).
  - *Not added to revenue:* receipts are counted in today's prices — multi-year contracts are fixed in dollars when signed, AI unit prices are falling, and the sector ceilings are built from today's prices. So no inflation uplift is given to revenue.

  - *What it changes:* the returns investors actually keep. Inflation is taken at 2.0 / 2.6 / 3.7% a year — the Federal Reserve's 2% goal, September core CPI (2.6%) and headline CPI (3.7%) [133, 134]. After it, an ordinary return is about 6.5%; flat spending averages about -1.6% a year in 2035 and an arms race about -9% (Table 2, bottom).
  - *Fixed prices, rising costs:* a fixed-price contract signed in 2026 is worth about a fifth less in real terms by 2035, while power, labor and site costs rise with prices. The model holds facility opex at its 2026 share of gross stock; letting it rise with inflation would add about $13B to the 2030 carry and $40B by 2035 on the flat path. That is left out of the base (no source yet for the escalation clauses) and shown here as a sensitivity: it makes the result worse, not better.

- **Worked example: one dollar lost in 2027, recovered in 2035.** Every step can be checked on a calculator.

  1. *The cost of waiting, in dollars.* The dollar lost in 2027 is borrowed, or taken from other investments. At the cost of money, 9.45% a year, the owner needs $1.0945^8 = 2.06$ dollars back in 2035 just to be even. This is what Table 3 charges.
  2. *How much of that is inflation.* Prices rising 2.6% a year for eight years multiply by $1.026^8 = 1.23$. A 2035 dollar buys what $1/1.23 = 0.81$ of a 2026 dollar buys.
  3. *The rest is real earnings given up.* $2.06/1.23 = 1.67$, which is 1.067^8: about 6.7% a year in today's money. (Across the Monte Carlo draws the median is about 6.5%, because the inflation range leans high.) So of the $1.06 the waiting costs, about a fifth is inflation and four-fifths is real return forgone.
  4. *The revenue side gets no uplift.* A contract signed in 2026 to pay $1 in 2035 still pays $1 — worth 81 cents in today's money. The model already counts it as $1 and never inflates it, so nothing is added here and nothing needs removing.
  5. *Why the payback year does not move.* To state everything in today's money, each year's hole and each year's recovery are divided by the same price level. Dividing a number by a positive number never changes its sign, so the year the hole closes is the same either way — 2033 for a 35% cut, 2035 for spending that tracks revenue (Table 3, both halves). Deflating the 9.45% rate a second time would have pushed payback later for no reason: that is the double count avoided.
  6. *What does change.* The return investors keep. In 2035 the flat path's average return is about $+1\%$ in dollars of each year, $(1.011/1.027) - 1 \approx -1.6\%$ in today's money: still losing purchasing power after nine years.

- **What average growth would do it on a flat path:** about 49% a year to break even in 2030, and about 64% a year to have made up the 2027–28 losses by then (Table 13). The sector chains deliver about 33%.

Table 2: Average return on the money invested, 2027 to each year, before tax (%, median). Top: in dollars of each year (an ordinary investor's return is ∼9.5%). Bottom: the same returns in today's money, (1+nominal)/(1+inflation)−1 (an ordinary return is ∼6.5%). Computed by `model/roi.py`.

Path	2027	2028	2029	2030	2031	2032	2033	2034	2035
Flat spending (plateau)	−4	−4	−4	−4	−3	−2	−1	0	1
Arms race (street path)	−6	−7	−8	−9	−9	−9	−8	−8	−7
35% cut (rationalize)	−2	−1	1	4	6	9	12	14	17
Spending tracks revenue	−4	−4	−3	−1	2	5	9	11	13
In today's money — after inflation of about 2.6%/yr (ordinary return ∼6.5%)									
Flat spending (plateau)	−7	−7	−7	−7	−6	−5	−4	−3	−2
Arms race (street path)	−8	−9	−10	−11	−11	−11	−11	−10	−9
35% cut (rationalize)	−5	−3	−1	1	4	6	9	11	14
Spending tracks revenue	−7	−6	−5	−4	−1	3	6	8	10

Table 3: Cumulative surplus (+) or deficit (−) from 2027 with the cost of money (∼9.5%/yr) charged on the losses — interest on debt, or earnings given up ($B, median, rounded to $10B). Computed by `model/roi.py`.

Path	2027	2028	2029	2030	2031	2032	2033	2034	2035
Flat spending (plateau)	−150	−370	−650	−970	−1,290	−1,600	−1,890	−2,170	−2,410
Arms race (street path)	−190	−520	−1,010	−1,650	−2,390	−3,190	−4,050	−4,970	−5,950
35% cut (rationalize)	−120	−220	−300	−320	−270	−140	+70	+370	+800
Spending tracks revenue	−150	−340	−520	−640	−650	−540	−350	−90	+210
The same, in 2026 dollars (divided by the price level, inflation ∼2.6%/yr)									
Flat spending (plateau)	−150	−350	−600	−870	−1,120	−1,360	−1,560	−1,740	−1,880
Arms race (street path)	−180	−500	−930	−1,480	−2,080	−2,710	−3,340	−4,000	−4,650
35% cut (rationalize)	−110	−210	−270	−290	−240	−120	+50	+300	+620
Spending tracks revenue	−150	−330	−480	−580	−570	−460	−290	−70	+160

The sixth builder: SpaceX/xAI, and why it is added

Musk's AI business now builds at the scale of a hyperscaler. Leaving it out made the paper too kind to the build-out, so v28 shows its cost next to the base.

In brief

- SpaceX's AI arm (xAI, Grok, the Colossus data centers) will spend about $75B on AI in 2026 — a tenth of the Big-5 — and its fourth quarter runs at $140–160B a year.
- Its rent from Anthropic is already in the revenue the model counts; its spending was not. Counting one without the other flattered the build-out.
- Added at its 2026 level, it widens the 2030 shortfall on a flat path from about $260B to about $345B; at its fourth-quarter pace, to about $425B.
- It is shown as an overlay, not yet merged into the base: three quarters of public data, and the largest quarter is still a forecast. It enters the base in v29.

Why it was left out. The paper counts the builders whose spending is reported in SEC filings and reconstructed quarter by quarter by Epoch AI — Microsoft, Alphabet, Amazon, Meta and Oracle [1]. Until 2026 xAI was private and small: $5.6B of AI spending in 2024 and $12.7B in 2025 [128]. Its first quarterly report inside a public company came in August.

Why it is added now. It is no longer small, and leaving it out biases the result.

- *Scale.* SpaceX's AI capex was $7.7B in the first quarter of 2026, $15.8B in the second and $16.4B in the third; total capex for the fourth quarter is guided to $35–40B, "almost entirely" for compute [129–132]. That is about $75B for 2026 (taking $32–37B of the fourth quarter as AI), and a run rate of $140–160B a year — Meta's scale. Musk has said compute will be "closer to 10 GW than 5 GW" by the end of 2027 [129].
- *Symmetry — the main reason.* The model counts revenue reaching *any* owner of AI data centers: Anthropic's compute bill, for example, sits inside the lab channel's cloud-capture share whoever is paid. Anthropic pays SpaceX $1.25B a month to May 2029 for all of Colossus 1 [129]. So that rent was counted as receipts, while the cost of the buildings and chips that earn it was not. Revenue in, cost out: that flatters the build-out, and a model that wants to be checked cannot keep it.
- *Revenue.* SpaceX's AI segment booked about $7.6B in the third quarter, including new cloud contracts and the Cursor acquisition [130, 131]. None of it is new to the model: rent from labs is in the lab channel, Grok subscriptions in consumer, Cursor in coding tools. So adding SpaceX adds cost and no new revenue.

What it does to the result. SpaceX's AI capex is run through the same vintage model as the Big-5 — same silicon and shell lives, energization lags, facility opex and 9.45% cost of money (`model/spacex_overlay.py`).

- *Held at the 2026 level* (∼$75B a year): it adds about $40B to the yearly cost in 2027, $60B in 2028, $87B in 2030 and $120B in 2035. The flat path's 2030 shortfall widens from about $260B to about $345B.
- *At the fourth-quarter pace* (∼$150B a year from 2027): it adds about $55B in 2027, $100B in 2028, $166B in 2030. The 2030 shortfall widens to about $425B.
- *The management claim.* SpaceX's CFO says compute is deployed for "less than a one-year payback" [129]. That is an interested party's statement, recorded as grade-J (judgment), like the Big-5's own claims (Section 16). Anthropic's $15B a year covers well under a year of a $75B build-out; the rest of the payback has to come from revenue the model already counts.

Why an overlay, not the base, in v28. Three reasons. SpaceX has three quarters of public segment data and only a forecast for the largest one; its fourth-quarter actual (late January) decides between the two paths above; and changing the base on the eve of release, without the register run and the reissue test, would break the paper's own update rule (Appendix H). The overlay is stated next to every headline it moves; it enters the register and the base in v29.

The same gap, elsewhere. The asymmetry is not only SpaceX's. The GPU-rental firms (CoreWeave, Nebius, Lambda, Crusoe) and data centers held in off-balance-sheet vehicles earn receipts the model counts, while only the part leased back by the Big-5 enters the carry. They are listed for v29 with the same treatment: cost and revenue on the same side of the line.

New sources

- **Anthropic's S-1 (public 26 October): the first filed lab financials.** First-half 2026 revenue $16.3B ($1.2B a year earlier); operating loss $0.7B; net loss $80.7B, of which $72.4B is a non-cash change in the fair value of convertible notes and similar instruments [123]. The $80.7B is therefore *not* cash burn and is not used as such.
- **The paper's Anthropic estimate held.** v27 put Anthropic's 2026 bookings at 50–65 (mode 57), implying a third quarter of $16–19B. The third quarter, reported to investors but not yet filed, was $16.8B [124]. The component is narrowed to 53–60 (mode 56).
- **The register's September revision is reversed.** On 29 September the base had been raised to $187B on press reports of Anthropic's expected $100B+ exit run-rate. The filed numbers do not support it; the base returns to $179B. This is the paper's warning — run-rates overstate bookings — confirmed by the first filed figure.

- **Cloud growth accelerated again.** Google Cloud $30.7B (+103%), cloud backlog $561B [115]; Azure +48%, commercial remaining performance obligation $677B [118]; AWS $46.0B (+39%), backlog $578B, growth guided above 40% in 2027 and 2028 [120]. This is the bull case realized, and is already inside the sector chains' 2027 growth of 40–80%.
- **Oracle: the first signal of the rationalize path.** At its 28 October Investor Day Oracle said that "following a period of peak capex in FY27–FY28, capital expenditures are expected to step-down in FY29", with positive free cash flow from the second half of FY28 [122]. That is the paper's 35%-cut path described by one of the five.
- **Anthropic's compute commitments.** The S-1 refers to committed spend "substantially all of which is related to compute and infrastructure"; press reports of the draft give noncancelable commitments of $111B to Google, $110B to AWS and $31B to Microsoft, and up to $750B in all [123, 125]. A large part of the hyperscalers' future "AI revenue" is one lab's investor capital returning to them — the circular flow of Section 9, now in a filing.

Accounting changes that make the carry look smaller

- **Microsoft lengthened building lives from 15 to 25 years** from fiscal 2027, and books new data-center leases as operating rather than finance leases [119]. Both lower *reported* capex and depreciation; neither changes what the buildings cost or how long the chips inside them last. The paper's carry is economic and keeps shell lives at 15/20/25 years.
- **Three-quarters of Microsoft's capex is now chips.** "Roughly 3/4 of our CapEx was for short-lived assets, primarily CPUs and GPUs" [118]. The paper's silicon share (45–65%) is a five-company average; Microsoft's mix supports the upper half, which shortens the blended life and front-loads the carry.

Easier to read

- **A plain-language front.** The abstract is eleven short points, followed by an at-a-glance box and a reading guide with page numbers.
- **The argument in the titles.** Every section and subsection opens with a one-line claim in blue, and the longest open with an *In brief* box: the simple argument first, the detail below for readers who want to dig in.
- **Short paragraphs with headlines.** Long paragraphs are split, with a blank line between them, and most open with a short blue headline, so the argument can be followed by scanning.
- **Symbols named first.** Quantities are named in words before their symbols are used.

- **Colour figures and a cleaner page.** All figures are redrawn in colour; the flow diagram labels every box and arrow; every page fits its margins.

Errata: where earlier versions erred

Errors in published versions are listed here and kept, version by version, in the repository's `ERRATA.md`; nothing is corrected silently.

- **v26.x–v27.1, abstract.** The abstract quoted a calendar-2026 revenue base of $187B, a 2030 plateau deficit of $255B and $g^* = 48\%$, from a register run in which the base had been raised on 29 September on a press report of Anthropic's expected $100B+ exit run-rate.

  The body tables (Tables 13 and 15) were computed on $179B and showed ∼$260B and 49%. The filed S-1 supports $179B. Effect on the conclusion: none (both inside the propagated uncertainty), but the abstract and the tables disagreed.

- **v26.x–v27.1, register.** Raising the base on a run-rate report broke the paper's own rule that run-rates overstate bookings. From v28 a lab component moves only on a filing or a booked-revenue figure.

Not an erratum, but worth flagging

- A figure of "$300B of 2027 capex" for Alphabet circulated widely after the call. It is a press estimate, not company guidance, and the paper does not use it.
- The revenue base is now stated consistently as $179B and the 2030 plateau deficit as ∼$260B throughout; v27's abstract carried a register run on the superseded $187B base ($255B). The body tables were already on the $179B base.

Still waiting on

Anthropic's amended S-1 with filed third-quarter figures (expected in November; its first-half statements go stale around 11–12 November); Nvidia's third quarter (19 November); Oracle's fiscal second quarter (December); a post-earnings consensus for 2027–28 capex; SpaceX's fourth-quarter capex (late January), which decides between the two SpaceX paths.

Executive Summary

- **The wait is the investor's problem.** The money spent in 2025–27 does not earn an ordinary return for a long time. Counting the early losses and a cost of money of ∼9.5%, spending that follows revenue earns back its losses with an ordinary return only in 2034–35, and a 35% cut in 2033; flat spending averages ∼1%/yr by 2035; an arms race loses money on average every year to 2035 (Tables 1 and 2). After inflation (∼2.6%/yr, counted once) the flat path is still losing ∼1.6% a year on average in 2035.

- **A sixth builder: SpaceX/xAI.** About $75B of AI capex in 2026 and a fourth-quarter pace of $140–160B a year. The model already counted its rent from Anthropic but not its cost; run through the same vintage model, it widens the 2030 flat-path shortfall from ∼$260B to ∼$345B (to ∼$425B at its current pace). Shown as an overlay in v28; merged into the base in v29 (p. 9).

  The losses peak at $260–550B on the paths that recover and pass $1.5T on the flat path. That delay, not whether AI is useful, is what investors are pricing.

- **What the October earnings said.** Every company that gave a direction pointed 2027 spending up; Alphabet lost ∼$500B of value in a day on its spending and a slowdown in search advertising, as AI answers replace ad-bearing results; Anthropic's first filed numbers matched the paper's estimate; and Oracle said its spending peaks in 2027–28 and steps down after — the first builder to describe the way out (What Is New in Version 28).

- **Labs and landlords.** The labs and the infrastructure owners fund, supply and compete with one another; Google and Meta are both. Who wins the squeeze moves the gap between them, not the gap with the customer: the carry is paid from the same end-customer dollar either way (Section 9.1).

- **The losses cost money too.** A company that spends ahead of revenue pays for the shortfall, either in interest on debt or in earnings it gives up elsewhere. Alphabet's long-term debt rose from $21.6B to $125.1B in the year to September [127].

  Charging ∼9.5% a year on the losses, the flat path's hole is ∼$970B by 2030 and ∼$2.4T by 2035, against $860B and $1.55T added up plainly; an arms race reaches ∼$6T by 2035; and even spending that follows revenue is not repaid until 2035 (Table 3).

- **The question is the growth rate g, not the demand level D.** A stock built ahead of demand is rational if demand compounds fast enough. Comparing a stock to a demand level lets each side pick its year. The vintage model instead asks: at what sustained growth rate does the installed base earn its carry, and by when? (Figures 12 and 14.)

- **The carry ramps.** Net of a non-AI baseline that the flat 2023 capex total pins at ∼$130B for that year, growing 2–10%/yr since, the AI-attributable stock is ∼$1.1T entering 2027 and ∼$2.2T by 2029. Its carry is ∼$390B in 2027, ∼$535B in 2028, ∼$725B in 2030 on a

plateau (Figure 2) — siting friction defers some of it a year and then adds cost. A 35% capex cut flattens it near $460B; an arms race pushes it to $1T.

- **Break-even growth is 33–62%/yr sustained to 2030, depending on spending.** From a calendar-2026 base of ∼$179B, plateau needs $g^* \approx 49\%$ (2030) and ∼64% to recover the 2027–28 deficits cumulatively; rationalization needs ∼33%; arms race ∼62%. Across the low and high ends of the decomposed base ($163–194B) the plateau figure runs 53% to 46%.

- **The sectors deliver about 33%, not 49%.** Fifteen independent sector chains (Section 6, Figure 4) put 2030 end-customer AI revenue at ∼$625B and infrastructure receipts at ∼$480B — office assistants and agents (∼$135B), advertising uplift (∼$118B), consumer (∼$60B) and coding tools (∼$60B) dominate; everything else is under $50B each. Growth decays as sectors approach seat-, budget-, user- and yield-set ceilings. The 2030 shortfall against a plateau carry is ∼$260B/yr, a 3.5$\sigma$ result (Figure 18).

- **The observed growth rate is above the threshold today, unevenly.** Anthropic's revenue went from $1.2B in the first half of 2025 to $16.3B in the first half of 2026 (filed, S-1) and $16.8B in the third quarter alone (reported) [123, 124]; OpenAI's run-rate went from $21B to $40B [13]; Google Cloud grew 103% in the third quarter [115]; Microsoft's consumer assistant and Meta's non-advertising AI products have no comparable disclosures.

  Two years of the labs' pace would clear the plateau path by 2029. The sector chains below are the reasons the paper expects deceleration; whether it comes is the 2027–28 test (Section 20).

- **Where the remaining doubt lives, and whether profit can overlap.** After nineteen decompositions (Section 7) the residual uncertainty sits in two axes: an adoption/capability factor and the assistant ceiling. Figure 22 maps P(receipts > carry) over both, with a feasibility band built from the enterprise software and services budget — itself decomposed, because that budget is being torn up: seat-priced SaaS is deflating under agents, European and Chinese buyers are displacing US vendors, and the money is moving from seats to AI solutions.

  On a plateau the 50% contour sits at a residual factor of ∼1.5 — 2030 AI revenue of ∼$950B, which is inside the feasible band ($920B–$1.31T) and requires AI to take ∼25% of a pool that is not growing. Under a 35% capex cut P(profit) is ∼50% in 2030 and ∼95% by 2032 at the paper's modes.

  That is the paper's result stated as a probability rather than a sign: not a prediction of loss, but a distribution over outcomes and the growth it takes to move it.

- **Economic depreciation and the commodity floor.** Straight-line lives are the accounting view. The economic view (reviewer comment) is that an installed accelerator is worth what it can earn against the newest chip's marginal cost per token, which falls 50–90% a year; on that schedule the 2023–26 silicon carries an unrecognized impairment of $100–250B today, and the carry is front-loaded into years the paper already calls a sunk deficit. Doubling inference utilization (batching, quantization, open models) serves twice the tokens from the same stock but, if prices fall in step, no more dollars.

And if prices converge on marginal cash cost — ∼$0.03–0.05 per million tokens against realized prices of $0.10–1.0 — receipts converge on the opex line, ∼$130B against a $725B carry. Section 14; the metric to watch is realized price per million tokens against that floor.

- **Readiness is a constraint in its own right.** Data Center Watch counts $130B of US projects blocked or delayed in Q1 2026 alone — matching all of 2025 — with 833 opposition groups in 49 states, a New York moratorium, and Ipsos polling near 70% local opposition [27–29].

  Water, ratepayer bills, noise and diesel are the stated grounds; Dublin and Amsterdam were the European template. The model now defers 10–35% of each cohort a year for consent and siting, adds 2–9% to shell cost for community benefits, water mitigation and relocation, and 0–6% to cooling opex where evaporative cooling is refused. The net effect is to shift the carry later, not to remove it.

- **Why g decays.** Nominal task savings convert to cash at roughly 0.28× (fractional time, verification, Parkinson–Jevons); realized savings leak to buyers and outcome-priced integrators at 10–50:1 against cloud tokens (Nordhaus); routine inference migrates to 1.45B NPUs a year; sovereignty removes 15–35% of demand while duplicating capital; grid queues strand cohorts before they earn; and a material share of 2026 lab compute is paid with investor capital ($122B and $65B raised this year [11, 16]), not customer revenue.

- **Scale.** A $780B/yr build-out and a $260B/yr shortfall sound enormous and are not, against the economies that host them: world GDP is ∼$115T, the US ∼$30T, China ∼$19T, the EU ∼$20T[v]. The build-out is 1.5–2.5% of US GDP per year depending on definition (gross, or lease-adjusted as in BofA's cycle comparison [68]) — at the peaks of the railway booms of the 1840s and 1870s and of telecoms in 1999–2001, each of which ended in impairment without ending the technology.

- **The street's path is the arms race.** The street has Big-5 capex at ∼$1.1T in 2027 and ∼$1.15T in 2028 [68, 126], and on the October calls every company that gave a direction for 2027 pointed up (What Is New in Version 28). The paper's plateau is therefore below consensus and its arms-race path is consensus; on that path the 2030 deficit is ∼$545B and no year through 2035 is profitable.

  The strongest statement of the bull case, a16z's September deck, is taken point by point in Section 15; the two documents agree on nearly every observable and disagree on two judgments — whether AI is paid from labor budgets as well as IT budgets, and whether today's rising GPU rental prices are a permanent state or a cycle top. The question here is who carries the write-down and when, not whether AI is affordable.

- **The sell-side hurdle agrees with the carry.** Goldman Sachs's September 2026 framework [69] — $1.42T of 2028–30 revenue to earn 15% on the $1.73T 2026–27 cohort — is 27.4 cents per dollar of capital per year; the paper's carry is 28.4 (Section 16, Table 11).

  The note isolates one cohort and benchmarks to backlog; the paper stacks the cohorts and forecasts receipts. The one material input difference is facility operating cost (2% versus

6.65% of capital), now carried as two anchors in the register.

- **Beyond 2030.** Ending the analysis in 2030 would invite the objection that 2032 makes it all back. Appendix B runs the model to 2035: on a plateau the annual deficit narrows to about $35B by 2035 and the cumulative deficit is never recovered within the horizon; under an arms race it widens every year; under a 35% cut, or under an adaptive path in which capex tracks realized receipts, annual profit arrives in 2030–31 and cumulative recovery by 2033–34 (Table 1).

- **Consequence, either way.** The 2025–27 cohorts will not earn their carry in 2027–28 under any growth rate. ASC 360-10 recoverability [83] is tested on projected cash flows, so impairment turns on whether management can still credibly forecast $g \geq g^*$ in 2028. That is the observable this paper puts its name on.

1 Method: What a Fermi Estimate Can and Cannot Say

Build the answer from many bounded factors; the few loose ones carry the uncertainty, and those are the only ones worth arguing about.

In brief

- A Fermi estimate multiplies many bounded factors; errors add in quadrature, so the few loose factors dominate.
- Inputs here are known to tens of percent, not orders of magnitude; the result to a factor of about 1.3.
- The paper therefore decomposes the loose inputs and reports which two or three carry the doubt.
- A conclusion is called robust only when the gap is larger than the propagated uncertainty.

On July 16, 1945, ten miles from the Trinity tower, Enrico Fermi dropped scraps of paper as the blast wave passed and, from their ∼2.5 m displacement, estimated a yield of about 10 kilotons of TNT [111]; radiochemistry later gave 21 ± 2 kilotons [112]. He had the order of magnitude before the instruments were read.

At Chicago he institutionalized the method with the piano-tuner question [113, 114]: chain population, household size, ownership density, tuning frequency and tuner throughput, and the product lands within a factor of two of the directory count.

Why does this work? If the estimate is a product of n independent factors, $Y = \prod X_i$, then $\ln Y = \sum \ln X_i$ and, for independent errors,

$$\sigma^2_{\ln Y} = \sum_{i=1}^{n} \sigma^2_{\ln X_i}. \tag{1}$$

Errors add in quadrature, and — the point that matters in practice — they add *weighted*. Most factors in a well-built chain are known to ±10–20% ($\sigma_{\ln X} \approx 0.1$–0.2); only one or two are loose. The total is then dominated by the loose ones and barely moved by the tight ones: nine factors at $\sigma = 0.1$ contribute less than one factor at $\sigma = 0.3$. Fermi's paper-scraps got within a factor of two because he had one loose factor and knew it.

Precision of tens of percent. A corporate budget is not an order-of-magnitude exercise either: people know what they spend to within 5–20%. This paper is in that regime. Every input below is bounded by a filing, a disclosure, a physical relation or a budget, and the reader should expect — and hold the paper to — precision of tens of percent on inputs and a factor of about 1.3 on the

result, not powers of ten.

What "Fermi" means here. "Fermi" here names the method of decomposition and propagation, not a claim that only the order of magnitude is known. Adding tight factors does not accumulate error; it partitions the estimate so that the loose factors are exposed and can be attacked individually.

That is why this paper decomposes demand into fifteen sectors rather than one growth rate, and why Section 17 reports a variance budget: the reader should see which two or three inputs carry the uncertainty, because those are the only ones worth arguing about.

Three rules for the uncertainty. Every numbered equation in the paper is restated and explained term by term, with a worked number, in Appendix F. The full propagation uses three different rules, set out and checked numerically in Appendix D: (1) *within a chain*, where factors multiply, relative uncertainties add in quadrature ($\sigma^2_{\ln}$ add); (2) *across chains that are summed* — sectors, or capex cohorts — absolute uncertainties add in quadrature, which in relative terms weights each chain by the square of its share of the total, plus any factor the chains have in common, which adds once and does not average away; (3) *between supply and demand*, which are subtracted, absolute uncertainties again add in quadrature and the result is judged by the gap divided by that combined uncertainty (the z-score).

Two disciplines follow: report one or two significant figures, and call a conclusion robust only when the gap exceeds the propagated uncertainty. Where the gap is inside the noise, say so.

Marked figures. A red [v] after a figure marks a number that rests on a single unaudited or secondary source and is still to be verified against a filing.

Open model. Parameters, distributions, the Epoch AI capex series and the Monte Carlo code are archived with this paper on Zenodo, the CERN-hosted open research repository; the permanent digital object identifier (DOI) for all versions is `https://doi.org/10.5281/zenodo.23406475`, which always resolves to the latest.

2 Prior Literature

Others framed the gap as a flow or a task count; this paper turns it into a stock, a growth rate and a probability.

1. **The capex–revenue gap.** Cahn [104] framed the "$600B question" as a flow comparison; Covello [105] questioned whether generative models solve problems valuable enough to earn back the stock. We extend both from flow to stock and from level to growth rate.

2. **Task-based macro limits.** Acemoglu [106] bounds AI's contribution to total factor productivity — output growth not explained by more labor or capital — at roughly 0.66% over ten years, by counting the share of tasks AI can do and the cost saving on each. Section 10 does the same accounting at the level of a firm's payroll: how much of the nominal saving on tasks becomes cash the firm can actually book.

3. **The productivity J-curve.** Brynjolfsson, Rock and Syverson [107] show that general-purpose technologies require complementary intangible investment before measured productivity rises. That lag is why enterprise adoption cycles (8–12 years) are longer than silicon lives (3–5), and it is also the strongest argument for building early: if the productivity is coming, capacity must be there first.

   Section 5 engages it directly. Solow's 1987 remark that computers were visible everywhere but in the productivity statistics [109] is the same phenomenon a generation earlier. Practitioners at the last mile report the same thing from experience: putting AI onto a poorly run process automates the process's defects, and the time goes into fixing the process, not the model.

4. **Surplus capture.** Nordhaus [108] estimates that innovators captured on the order of 2% of the social surplus from their innovations over 1948–2001, the rest going to customers as lower prices and better products. A 2% share is a 50:1 ratio of customer benefit to innovator revenue. Section 11 finds 10–35:1 for AI contact-center automation — the same phenomenon, measured on one sector.

5. **Scaling and spending data.** Epoch AI's capex [1] and revenue [13] series, and Villalobos et al. on the human-text data wall [110], supply the empirical spine.

The evidence for the build-out is strong and the paper uses it as input: Google Cloud's contracted backlog reached $514B in Q2 2026, up from $462B a quarter earlier, on 82% revenue growth [51] (how much of it is AI-specific is not disclosed); the 2026 capex guidance has been revised upward all year [2, 3]; Goldman models $5.3T of hyperscaler capex over 2025–2030 [5]; and frontier-lab revenue has grown at multiples per year [13].

Those are the observables the model must reconcile with, and the next section lists them with their provenance — audited filing, company statement, or press report — because they are not all of the same quality.

3 What We Observe (2025–2026)

Capex has doubled, cloud growth is accelerating and lab revenue is multiplying — the bull case is real; the question is whether it is fast enough.

In brief

- The table lists every fact the model must agree with, marked by quality: filing, company statement or press report.
- Spending has doubled, cloud growth is accelerating, and lab revenue is multiplying — the bull case so far.
- About $190B of 2026 lab funding is investor money, much of it spent on the same clouds.
- The US and Chinese operators show the same pattern.

Table 4: Observables the model must reconcile with ($B unless noted)

Quantity	Value	Source / note
Big-5 capex 2022 / 2023 / 2024 / 2025	162 / 161 / 260 / 448	Epoch AI from SEC XBRL, cash PP&E plus new finance leases [1]
Big-4 capex guidance, 2026 (Q3 calls, Oct. 21–29; v28)	About unchanged in total	Alphabet $195–205B "remains unchanged"; Amazon ∼$220B; Meta $135–145B; Microsoft ∼$170B (from ∼175) [115, 118, 120, 121]. For 2027 every company points up: Alphabet "increase significantly", Amazon "meaningfully more" (no figures)
Q3 2026 quarterly capex (v28)	GOOG 51.4; MSFT 45.2; AMZN 77.3; META 34.9	Company releases; definitions differ (Microsoft and Meta include finance leases, Amazon gross purchases) [115, 118, 120, 121]
Cloud, Q3 2026 (v28)	Google Cloud 30.7 (+103%); Azure +48%; AWS 46.0 (+39%)	Backlogs: Google Cloud $561B, Microsoft commercial RPO $677B, AWS $578B [115, 118, 120]
Anthropic S-1, H1 2026 (v28)	Revenue 16.3; op. loss 0.7; net loss 80.7	$72.4B of the net loss is a non-cash fair-value change on convertible notes [123]
Big-4 capex guidance, 2026 (Q2 calls, Jul. 22–30)	725–745	Alphabet $195–205B (raised from 180–190); Microsoft ∼$175B calendar-2026 (FY26 cash capex $115.9B, Q4 $41B); Amazon ∼$220B (raised from ∼200 on memory prices); Meta $135–145B (floor raised twice) [51–53]; Oracle adds ∼50 to make the Big-5 ∼780
Q2 2026 quarterly capex	GOOG 44.9; MSFT 41; AMZN 54.2; META 31.1	Company releases [53]; Alphabet free cash flow −$5.9B, its first negative quarter

continued on next page

Table 4, continued

Quantity	Value	Source / note
Google Cloud, Q2 2026	$24.8B (+82%); backlog $514B; op. income $8.8B	Alphabet Q2 release, Jul. 22 [51]; backlog up from $462B in Q1
Azure, FY26 Q4; AWS, Q2 2026	Azure +43%, TTM >$100B; AWS +37%	Microsoft Jul. 29; Amazon Jul. 30 [52, 54]
Microsoft 365 Copilot paid seats; M365 commercial seat growth	>30M (Jul. 2026); +6–7% y/y through FY26	Microsoft FY26 Q4 call and Form 8-K investor metrics [52, 55]
Nvidia data-center revenue, FY2026	193.7	Form 8-K, Feb. 25, 2026 [8]; Q1 FY27 $75.2B, i.e. ∼$300B run-rate [9]
Anthropic run-rate: Dec. 2025 / Feb. / Apr. / May / Jul. 2026	9 / 14 / 30 / 47 / 65	Company disclosure (Feb.) [10]; Bloomberg via TechCrunch and Axios (Jul.) [11, 12]
OpenAI run-rate: Dec. 2025 / Aug. 2026	21 / 40	Epoch revenue dataset, media reports [13]; 2025 booked revenue $13.1B against a $20.9B operating loss (reported, unaudited) [16][v]
Microsoft AI revenue run-rate, Q3 FY26	>37	Earnings coverage [6][v]
AWS AI revenue run-rate, Q1 2026	>15	Earnings coverage [7][v]
Meta Advantage+ run-rate, Q2 2026; disclosed AI relevance lifts	>75; +8% clicks, +15.7% conversions	Q2 2026 earnings call [17]; Q2 revenue $60.8B, price per ad +12%, impressions +14% [18]
OpenAI gross margin, Q1 2026; 2026 Azure spend	∼39%; ∼13	Reported financials [16][v]
Anthropic reseller revenue recognition	Gross basis	Bedrock/Vertex end-customer spend booked as Anthropic revenue, partner payouts as expense [19]
Microsoft 365 commercial price increase, Jul. 1, 2026	up to 43% by plan; E3 →∼$39/user/mon	Copilot Chat and Security Copilot bundled into suites; Windows Enterprise also up [42, 43]
Enterprise software market value lost, Jan.–Apr. 2026	∼$2T; $285B in 48 h	The "SaaSpocalypse": largest non-recessionary software drawdown in 30 years (JPMorgan); Atlassian's first seat-count decline [36, 38]
European public-sector exits from Microsoft	France (national), Schleswig-Holstein, Denmark	DINUM Windows-to-Linux mandate, Apr. 2026; 20%→40% of German IT leaders implementing European software in a year [40, 41]
US data-center projects blocked or delayed by local opposition	$156B (2025); $130B (Q1 2026 alone)	Data Center Watch [27]; 75 projects in Q1 2026; 833 active opposition groups in 49 states; New York moratorium Jul. 2026 [28]

continued on next page

Table 4, continued

Quantity	Value	Source / note
Oracle Q1 FY2027 (Sept. 10, 2026)	RPO $664B; OCI $7.4B (+121%); GPU utilization 97.9%	RPO up $26B q/q, over half from OpenAI; about half converting within 36 months; new contracts "via prepay or bring-your-own-hardware"; FY26 capex $55.7B, free cash flow −$23.7B; ∼$40B more financing planned FY27 [46, 47]
OpenAI booked revenue, Q1 / Q2 2026; run-rate Aug.; 2025 loss	5.7 / 6.7; 40; loss $20.9B on $13.1B	Sacra and press [16, 48]; IPO deferred to 2027; FT-reported $278B cash-burn plan[v]
Anthropic expected 2026 exit run-rate	>100	Bloomberg via NYT, Sept. 15, 2026; IPO shares expected to trade by November [16][v]
ChatGPT users; Claude app users	1B MAU (Jun.); 900M WAU (Feb.); 56M MAU (Q2)	OpenAI/Sensor Tower via Reuters; Sacra [48, 49]
Street consensus Big-5 capex, 2027 / 2028	∼1,100 / ∼1,150	Goldman Sachs on the Street, Sept. 25 (∼$1.1T 2027) [126]; S&P Capital IQ as of Sept. 18, 2026 (1,050 / 1,150), via a16z [68]; J.P. Morgan: 791 / 1,066 / 1,179 for 2026–28 [71]
Cloud backlogs (MSFT RPO + Google Cloud + AMZN RPO), Q2 2026	∼1,700; +∼150% y/y	Company filings compiled by a16z [68]
GPU rental prices, Sept. 2026 ($/GPU-hour)	H100 2.63; A100 1.59; H200 3.29; B200 5.69	Silicon Data index via a16z [68, 72]; residual values rising through 2026
Consensus hyperscaler free cash flow	∼0 in 2026–27; >$500B by 2030	FactSet / Goldman Sachs via a16z [68]
Token share on OpenRouter, mid-2026	Frontier labs ∼69% of spend on ∼35% of tokens; tokens +600× in 2 yr	OpenRouter via a16z [68, 73]
Lab equity raised, 2026 YTD	∼190	OpenAI $122B at $852B; Anthropic $65B at $965B [11, 16]
Goldman Sachs Phase-2 ROIC framework (Sept. 24, 2026)	$1.42T revenue 2028–30; $11.6B/GW-yr	Six US hyperscalers' 2026–27 AI capex $1.726T (∼41 GW at $42.4B/GW; 70/30 compute/shell at 5/15 yr; opex $836M/GW-yr; 15% ROIC on average annual capex); sensitivity $0.91–1.89T over 0–30% ROIC [69]; Section 16
Backlog conversion the three CSPs would need (GS)	59% of $1.69T over 2028–30	Alphabet 78% of $496B, Amazon 68% of $514B, Microsoft 40% of $678B; assumes no backlog growth [69]

continued on next page

Table 4, continued

Quantity	Value	Source / note
AI infrastructure capex from the semiconductor build (GS), 2026 / 27 / 28	861 / 1,338 / 2,008; 20 / 35 / 57 GW	All buyers (hyperscalers, labs, sovereigns, enterprises) from Nvidia, Broadcom, AMD, Marvell, MediaTek revenue per GW; implied $42 / 38 / 35B per GW [69]; 57 GW exceeds the paper's grid cap (22–40 GW/yr)
Calendar-2026 AI revenue, all channels	**∼179 (168–191)**	Seven-component decomposition, Section 7, Table 8

Provenance matters here. The capex series and Nvidia's revenue are audited filings; the lab run-rates are company statements or press reports citing them; the Microsoft, AWS and OpenAI figures are earnings-call remarks and leaked financials, not audited disclosures, and are marked accordingly. Meta's AI spending is monetized through advertising rather than sold as a product, so it has no "AI revenue" line at all; the paper treats it as an advertising-uplift channel (Section 7).

What the observables say. Three things follow. Nvidia's $300B data-center run-rate is consistent with the capex series and with a silicon share near half. Frontier-lab revenue is growing at multiples per year, which is the bull case realized so far. And roughly $190B of lab equity was raised in 2026 alone, a sum comparable to the labs' combined revenue — so a material share of the compute they buy from hyperscalers this year is paid with investor capital, not customer cash.

3.1 Do the five, and the Chinese four, tell the same story?

US and Chinese operators are on the same curve.

They do, and the consistency is itself evidence. Across Alphabet, Microsoft, Amazon and Meta the Q2 2026 pattern is identical: capital expenditure roughly doubling year on year, guidance raised during the year, cloud revenue growth accelerating (Google Cloud +82%, Azure +43%, AWS +37%), and free cash flow turning negative at the two heaviest spenders [51, 53].

The Chinese hyperscalers are on the same curve a year behind and at smaller scale: in Q2 2026 Alibaba's capex was RMB 67.7B (+75%) and Tencent's RMB 52.8B (+176%), each about a quarter of quarterly revenue; Alibaba's AI cloud and compute revenue grew 45% while adjusted profit fell 38%; Tencent's free cash flow went negative for the first time in its history on RMB 51B of prepayments for computing power; Baidu's capex reached 36% of revenue with negative free cash flow [59, 60].

The nine largest cloud operators. TrendForce puts 2026 capex for the nine largest cloud operators — the Big-5 plus ByteDance, Tencent, Alibaba and Baidu — at $830–890B, up 79–90%, with the

Chinese four raising AI capex ∼80% [61, 62]. The same source notes Chinese cloud returns on invested capital of 13–20% against 25–50% for US peers [59].

Two implications.

- The growth rates the paper's near-term chains assume (40–80% into 2027) are what every large operator on both sides of the Pacific is reporting, so the base case is not built on a US anomaly.
- The Chinese four add $50–110B/yr of capex that is outside the Big-5 register and outside its demand pools; the model is a Big-5 model, and the Chinese stock competes for the same tokens with cheaper power and less efficient silicon (Section 14).

4 The Supply-Side Carry: A Vintage Model

Each year's spending stays on the books for years, so the yearly cost keeps climbing even if spending stops growing.

In brief

- Each year's spending is a cohort that stays on the books: chips for about four years, buildings for about twenty.
- The yearly cost of the whole stack — wear, running costs and a return on the money — is the carry.
- On flat spending the carry climbs from about $390B in 2027 to about $725B in 2030, because old cohorts are still being paid for as new ones arrive.
- AI chips run hot and wear out faster than the accounting lives assume, and they cannot be cheaply reused.

4.1 Cohorts, not a snapshot

Spending is counted by the year it was made, net of the old non-AI baseline, and each year's cohort is carried until it wears out.

Let I_c be Big-5 capex in cohort year c (Table 4; Figure 1) and $A_c = \max(I_c - N_c, 0)$ the AI-attributable part after subtracting the non-AI baseline $N_c = N_{2023}(1 + g_N)^{c-2023}$. The baseline is constrained by data: total capex was flat at $161B in 2023 while AI purchases began [1], so

$N_{2023} = 161 - A_{2023}$ with A_{2023} ∼Triang(20, 30, 40), and it grows at g_N ∼Triang(2, 6, 10)%/yr for ordinary cloud refresh and logistics (Section 7).

AI-attributable capex above a grid energization ceiling of Triang(1,150, 1,400, 1,680) $B/yr — 22–40 GW of new IT load at $38–55M per MW — is deferred to the following year and carries return but not depreciation (Section 7); the ceiling does not bind on a plateau and binds in 5% of arms-race draws.

Siting, consent and water. Separately, a fraction f_{delay} ∼Triang(0.10, 0.20, 0.35) of each cohort from 2026 is deferred a year by siting, consent and water constraints; shell cost carries an uplift κ_{site} ∼Triang(1.02, 1.05, 1.09); and facility opex carries $(1+u)$ with a cooling-uplift u ∼Triang(0, 0.03, 0.06) for water-constrained cooling (Section 7).

Each cohort splits into a silicon share ϕ ∼Triang(0.45, 0.52, 0.60) — anchored on Nvidia's data-center revenue (Section 7) — with an economic life L_{si} that is the fleet-weighted harmonic mean of the training-cluster life L_{tr} ∼Triang(2.5, 3.5, 4.5) yr and the inference-fleet life L_{inf} ∼Triang(4, 5, 6) yr at a training share f_{tr} ∼Triang(0.35, 0.45, 0.55) — effective $L_{\text{si}} \approx 4.2$ yr (P10–P90 3.75–4.6) — and a shell/power/cooling share with life L_{sh} ∼Triang(15, 20, 25) yr.

Silicon is energized in its spend year at an energization fraction ℓ_{si} ∼Triang(0.5, 0.7, 0.9) and shell at ℓ_{sh} ∼Triang(0.2, 0.4, 0.6), the rest the year after (lower-case ℓ is a fraction; upper-case L is a life in years). With straight-line depreciation and a mid-year convention, the carry H_t in year t — the annual cost of owning the installed base, summed over cohorts c and over the two components j (silicon, shell) — is

$$H_t = \sum_{c \le t} \sum_{j \in \{\text{si,sh}\}} \left[\frac{G_{c,j}}{L_j} + c_{\text{opex}}\, G_{c,j} + r\, G_{c,j} \left(1 - \frac{t - c + \frac{1}{2}}{L_j} \right) \right] \mathbf{1}\left[t - c + \tfrac{1}{2} < L_j \right] + r\, \text{Deferred}_t, \quad (2)$$

where $G_{c,j}$ is the in-service gross value of component j of cohort c, L_j its life, the facility-opex share c_{opex} ∼Triang(0.059, 0.0665, 0.074) of in-service gross (decomposed in Section 7), the cost of capital r ∼Triang(0.090, 0.0945, 0.099) from CAPM components (Section 7) [84], and $\mathbf{1}[\cdot]$ an indicator that is 1 while the cohort is younger than its life. Forward paths: **Plateau** (780 flat), **Arms race** (1,000, then 1,100; consistent with the $1T+ 2027 projections in [2]), **Rationalize** (550, then 500).

Table 5: Annual carry H_t ($B, median; Plateau P10–P90 in parentheses)

Path	2027	2028	2029	2030
Plateau (780)	390 (365–415)	535 (505–570)	650 (615–685)	725 (685–770)
Arms race (1000, 1100)	425	650	850	1,015
Rationalize (550, 500)	350	430	465	460

In 2028 under Plateau the median carry decomposes as depreciation ∼$280B, facility opex ∼$130B, return on net book and on deferred capital ∼$125B. The carry ramps because 2027 is the cheapest

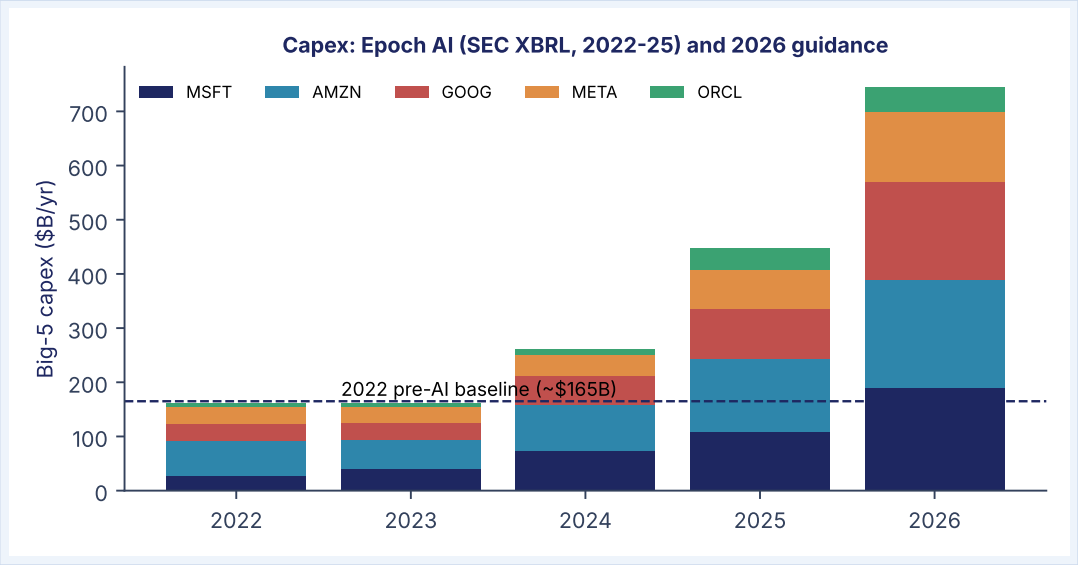


Figure 1: Big-5 capex by company, 2022–2025 (Epoch AI, SEC XBRL [1]) and 2026 guidance [2,3]. The dashed line marks the 2022 level; the model's non-AI baseline is pinned from 2023 at about $130B (Section 7).

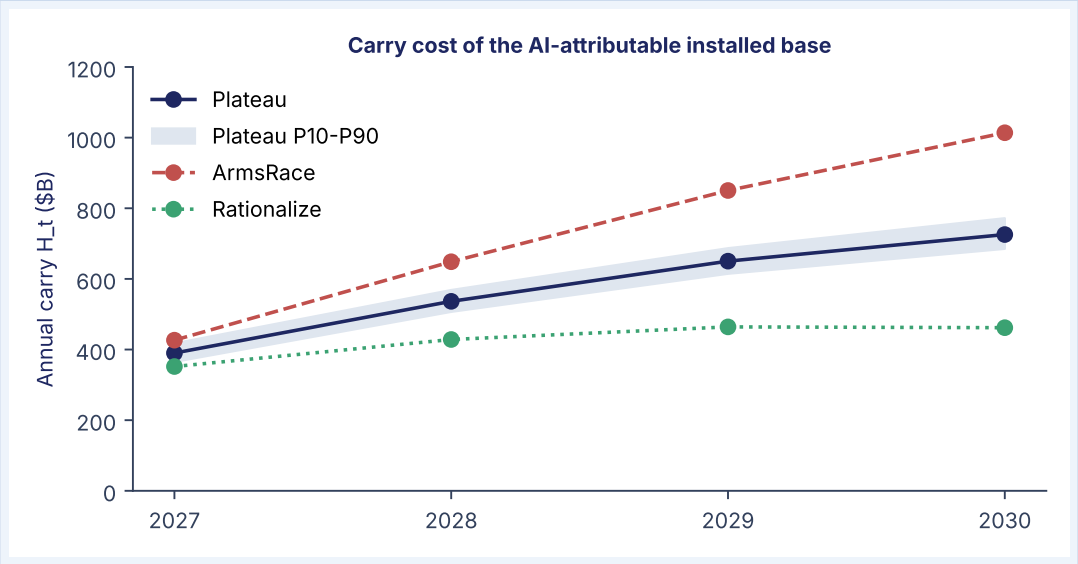


Figure 2: Annual carry H_t of the AI-attributable stock under three capex paths (Monte Carlo medians; band is P10–P90 for Plateau).

year — the 2026 cohort is half energized and the 2027 cohort barely — and rationalization flattens rather than cuts because the 2025–26 cohorts are on the books whatever happens next.

4.2 Silicon life: accounting versus economics

The books say five to six years for a chip; the economics say about four, and the paper shows the result both ways.

The operators' own accounting lives for servers are 5 years at Amazon (cut from 6 in January 2025, explicitly citing the pace of AI hardware change [75]), 5.5 at Meta [76], and 6 at Microsoft and Alphabet [77, 78]. We use an economic life of 3–5.5 years because power, not silicon health, is the binding constraint: where interconnection is queued [90–92], a 700 W prior-generation part cannot hold a substation slot against a successor with several times the throughput per watt; secondary-market volume cannibalizes new cluster pricing; and 24/7 thermal duty is an accelerated-aging regime for stacked memory.

Shown both ways. Against this, 2020-vintage A100s remained rented through 2026, and Alphabet and Microsoft have not shortened their lives. So we show the result both ways: with accounting lives (4.5–6.5 yr) the plateau break-even for 2030 moves from 49% to 51%, and with an 8-year life it is 49% — longer lives lower annual depreciation but keep every cohort on the books longer, and the two effects nearly cancel by 2030 (Table 13).

The dual-use defense — repurposing 40–100 kW/rack liquid-cooled halls for databases and web hosting — does not recover the carry; the capital is committed to dense tensor math.

4.3 Thermal acceleration: high failure rates are the intrinsic norm

AI chips run hot all the time, so they wear out faster than the servers the accounting lives were set on.

The accounting lives of 5–6 years were set on the experience of CPU servers at ASHRAE-class inlet temperatures. AI accelerators are a different thermal regime: 700–1,000 W parts at junction temperatures of 80–95°C under sustained duty, with stacked HBM and through-silicon vias in the same envelope. Three standard reliability relations bear on their economic life:

- **Arrhenius acceleration.** For temperature-driven wear-out mechanisms the acceleration factor is $AF = \exp\left[\frac{E_a}{k}\left(\frac{1}{T_1} - \frac{1}{T_2}\right)\right]$; with the JEDEC default activation energy $E_a \approx 0.7$ eV [79] this is close to the industry rule of thumb that failure rates double for every 10°C [80]. A

part held 20°C hotter than the population its accounting life was calibrated on has roughly a quarter of that life.

- **Electromigration.** Black's equation, MTTF $\propto J^{-n}e^{E_a/kT}$ [81], couples the same exponential to current density; accelerators run both high.
- **Thermal cycling.** HBM stacks and TSV interconnects fail by solder and micro-bump fatigue under thermal cycling (Coffin–Manson), which is driven by load swings rather than steady temperature; inference fleets with bursty duty see both mechanisms at once.

Field data agree. Meta's Llama 3 training run on 16,384 H100s recorded 419 unexpected interruptions in 54 days, 58% attributed to GPU faults including HBM3 errors — about one accelerator-related interruption every three hours at a scale that is now routine [82]. High failure is not an anomaly of early hardware; it is the expected behavior of silicon run at the top of its thermal envelope.

Three consequences for the model.

- First, the economic-life distribution Triang(3, 4, 5.5) is, if anything, generous; a thermally motivated Triang(2.5, 3.5, 5) raises the 2027–28 carry by $10–15B/yr and lowers 2029–30 slightly as cohorts roll off faster (2030 break-even g^* stays at about 49%).
- Second, and more important, shorter life converts a growing share of a flat $780B/yr into *replacement* rather than *growth*: at a 3.5-year life the plateau path is buying back roughly a third of its own stock every year, so capacity — and therefore revenue potential — rises much more slowly than cumulative spend.
- Third, the salvage and second-life defenses that follow are weaker than their proponents assume, because the parts being down-cycled are the ones that have already consumed most of their Arrhenius budget.

4.4 The salvage fallacy in detail

Old chips cannot simply be moved to cheaper work: power, not silicon, is the scarce input, and a new chip earns more from the same power slot.

Corporate disclosures have extended server useful lives to six years [75,78], and a common defense holds that frontier accelerators can be down-cycled into batch inference for 6–8 years at meaningful residual value. Three constraints bound this:

- **Power is the binding input.** Where interconnection is queued (PJM, ERCOT, Dublin, Amsterdam) [90–92], a 700W prior-generation part cannot hold a substation allocation against a

successor delivering several times the throughput per watt. Older parts are de-racked for the grid slot, not for the silicon.

- **Competing with one's own ghost.** Secondary-market volume of prior-generation parts cannibalizes new cluster pricing, as it did for mainframes in IBM's own history.
- **Thermal duty.** 24/7 operation at peak thermal load is a known accelerated-aging regime for stacked memory and TSV interconnect; a multi-year second life at full utilization is not the default assumption an engineer would make. We have not found a public, peer-reviewed failure-rate study specific to HBM3e/HBM4 under hyperscale duty and do not cite one[v].

Against this, the empirical record is mixed: 2020-vintage A100s remained fully utilized in rental markets through 2026. We therefore use $L_{\text{si}} \sim$Triang(3, 4, 5.5) rather than the 2.5–3.5 years of harsher analyses, and note that even $L_{\text{si}} = 8$ does not by itself close the gap by 2030 (Table 13).

4.5 The dual-use fallacy in detail

An AI hall cannot be reused for ordinary computing at a price that recovers its cost.

AI halls are engineered for 40–100 kW/rack with direct-to-chip liquid cooling and non-blocking fabrics, at several times the cost per megawatt of 8–12 kW enterprise halls. Repurposing them for relational databases and web hosting does not recover the carry; the capital is physically committed to dense tensor math.

5 Demand: Base, Growth, Quality

Revenue is about $179B in 2026, and it must be counted carefully: run-rates overstate it and some of it is investors' money.

In brief

- AI revenue in 2026 is about $179B, counted from seven sourced parts.
- Only part of it reaches the data-center owners: about 82 cents of each customer dollar.
- Run-rates overstate what is booked, and some lab spending is investors' money, not customers'.

5.1 Anchor to what is observed

Three flows are easy to confuse — what customers pay, what reaches the cloud, and what leaks away — so the paper names each.

Terms, first, because three flows are easy to confuse. *End-customer revenue* D_t is what buyers — enterprises, consumers, advertisers — pay for AI products and services in year t; $R_s(t)$ is the same thing for one sector s, and $D_t = \sum_s R_s(t)$. *Infrastructure receipts* are the part of that money that reaches the owners of the data centers, after the frontier labs keep their gross margin and after the part that runs on devices, on customers' own premises or on integrators' small models — collectively, *leakage* — never reaches a cloud meter at all.

The *cloud-capture share* θ_s is the fraction of a sector's end-customer revenue that becomes infrastructure receipts. Figure 3 draws the flows; the carry test compares infrastructure receipts, not end-customer revenue, with H_t.

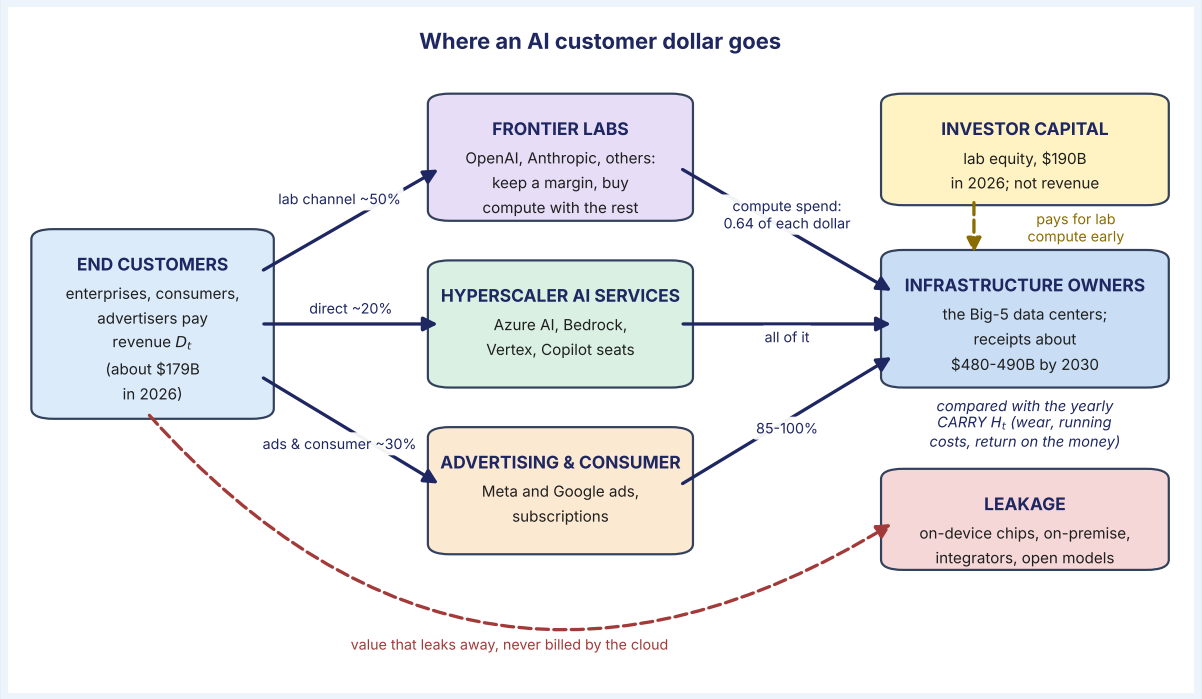


Figure 3: Where an AI customer's dollar goes (each arrow is labelled with the share of the dollar it carries). End-customer revenue enters through three channels; the frontier labs keep a margin and spend the rest on compute; part of every channel leaks to devices, premises and integrators; what remains is the infrastructure receipts that must cover the carry.

Calendar-2026 end-customer AI revenue across all channels is D_{2026} ~Triang(161, 179, 198) $B, the sum of seven sourced components, the hyperscaler component itself decomposed from Microsoft's disclosures (Section 7). Not all of it reaches the infrastructure layer: frontier labs keep a margin and spend the majority of their costs on compute [15], so we apply an infrastructure share θ ~Triang(0.77, 0.815, 0.86), a channel-weighted decomposition with the lab channel itself

decomposed by lab (Section 7). Demand then grows at a sustained rate g:

$$D_t = \theta\, D_{t_0}(1+g)^{t-t_0}, \qquad t_0 = 2026, \tag{3}$$

where D_t here denotes the infrastructure receipts of the top-down path (end-customer revenue times θ), θ is the revenue-weighted cloud-capture share, D_{t_0} the 2026 base, and g the sustained growth rate in percent per year (a g of 0.49 means 49%/yr). Does g itself follow a curve? In the bottom-up estimate it does: the sectors' implied growth falls from ∼57% in 2027 to ∼14% in 2030 (Table 7), the shape of a logistic.

The top-down sweep deliberately holds g constant so that a single number answers "how fast must it grow" — a sustained rate is easier to test against the labs' disclosures than a decaying one. This makes g the single parameter the debate turns on, and it answers the J-curve objection directly: if productivity arrives late but arrives [107], then building early is right — and the bull must name the g at which it pays.

5.2 Revenue quality

Run-rates overstate what is booked, and part of the labs' spending is investor capital, not customer revenue.

Two caveats on the base.

- First, run-rates overstate booked revenue: OpenAI's reported 2025 booked revenue was $13.1B against an end-2025 run-rate of $21B [13, 16]; we use calendar-year figures.
- Second, a material share of 2026 lab compute purchases is funded by the ∼$190B of equity raised this year rather than by customer revenue [11, 16].

OpenAI's 2025 operating loss is reported to have exceeded its revenue [16]; the figure is leaked and unaudited, and the paper treats it with corresponding skepticism, using only its direction.

The cost of opacity. That skepticism is itself a cost of the disclosure regime: a company at this scale, with these commitments, that publishes run-rates in the months of its choosing and lets its losses reach the market by leak, generates churn — in its counterparties' recoverability forecasts, in its lenders' covenants, and in analyses like this one — that a single audited statement would remove.

The same applies to every lab and to the hyperscalers' "AI revenue" lines: partial disclosure does not protect the discloser, it adds noise to everyone's estimate of it, including the register this paper maintains.

Investor money is not customer revenue. Those receipts are real cash to hyperscalers and are counted in θD; but they are bridging, not durable, and the model's g is a growth rate of customer revenue, not of investor capital. Related-party round trips — Microsoft–OpenAI, Nvidia–CoreWeave, Amazon/Alphabet–Anthropic — are of order \$10B/yr[v] and are small against this; the investor-funded channel is the circularity that matters in 2026.

6 Bottom-Up Demand: Fifteen Sector Fermi Chains

A second, independent estimate: fifteen sectors, each growing toward its own ceiling. Together they grow about 33% a year from their own 2026 base, not 49%.

In brief

- A second estimate that does not assume a growth rate: fifteen sectors, each growing toward a ceiling set by seats, budgets or users.
- Together they reach about \$625B of customer revenue in 2030, growing about 33% a year on average and slowing as they near their ceilings.
- Four sectors carry three-quarters of it: office assistants and agents, advertising, consumer, and coding tools.
- Startups failing, chips moving onto devices and routine work moving to small models all cap what the cloud collects.

The top-down path in Section 5 has one free parameter, g. A Fermi estimate is only as good as the number of independent factors in it, so we build a second estimate that does not use g at all. Each sector s is a chain of four estimates: a calendar-2026 base R_s (the sector bases sum to about \$205B, above the \$179B channel count of Section 7 because sectors count end-customer spend that the channel count nets out; if anything this is generous to the build-out, and the base is not independent evidence — the ceilings and ramps are), a 2030 ceiling C_s derived from a physical or budgetary constraint (Appendix C), a logistic ramp rate k_s, and a cloud-capture share θ_s (the fraction of end-customer revenue that reaches the infrastructure layer after lab margins, on-device execution, on-premise deployment and integrator capture). End-customer revenue follows

$$\begin{aligned} R_s(t) &= \frac{C_s}{1 + (C_s/R_{s,0} - 1)\, e^{-k_s(t-t_0)}}, \qquad t_0 = 2026, \\ D_t^{\mathrm{BU}} &= \sum_s R_s(t), \qquad \text{Receipts}_t = \sum_s \theta_s R_s(t), \end{aligned} \tag{4}$$

where $R_{s,0}$ is the sector's 2026 revenue (\$B), C_s its ceiling (\$B), and k_s its ramp rate in units of per year: at $k = 0.8$ the sector covers half the distance to its ceiling in about $\ln 2/0.8 \approx 0.9$ years.

The curve starts at $R_{s,0}$, rises fastest early, and flattens as it approaches C_s; the sector's growth rate is not an input but falls out of the curve. Two common factors — M_C on ceilings (∼Triang(0.7, 1.0, 1.4)) and M_k on ramp rates (∼Triang(0.7, 1.0, 1.3)) — are multipliers drawn once per trial and applied to every sector. They represent the macroeconomic background the sectors share — a recession, an interest-rate shock, a regulatory turn, or a capability step that makes agents trustworthy everywhere at once — and they keep fifteen independent draws from averaging to an implausibly narrow band.

Sectors are listed in order of their 2030 ceiling. Sectors exposed to sovereign procurement carry the sovereignty carve-out γ_{sov} (the share of demand kept for domestic providers, Section 8) in the sovereignty scenario, and in every scenario a European displacement ramp g_{EU} ∼Triang(3, 5, 8)% by 2030 for the movement of European buyers away from US vendors documented in Section 7.

Table 6: Sector parameters ($B; triangular min/mode/max) and the constraint that sets each ceiling

Sector	**2026 base $R_{s,0}$ ($B)**	**2030 ceiling C_s ($B)**	**Ramp k_s (1/yr)**	**Cloud share θ_s (0–1)**	**Ceiling constraint (Appendix C)**
Office assistants / agents	20/30/45	100/150/230	0.5/0.8/1.1	0.45/0.6/0.75	Disclosed paid seats (20M M365 Copilot, Apr. 2026) grown with decaying rate, × price, × (1 + agentic multiplier), hard-capped at 3–5.5% of 2030 IT spend; Section 7
Advertising uplift	25/40/55	105/136/170	0.4/0.7/1.0	0.9/1.0/1.0	8–18% relevance/pricing lift on 2030 Meta+Google ads ($700–950B) plus AI-native formats; decomposed in Section 7
Consumer subscriptions	18/25/35	50/64/80	0.5/0.8/1.2	0.75/0.85/0.9	1.3–2.0B unique users × 4–8% paid × $20–26/month, plus free-tier ads and premium tiers; Section 7
Coding tools	15/20/28	40/60/90	0.6/0.9/1.3	0.7/0.8/0.9	29M developers × paid share × seat+token spend; non-recurring refactor impulse
Search & internal use	12/20/30	30/50/80	0.4/0.7/1.0	0.9/1.0/1.0	Defends rather than adds to $250B search; internal productivity
Financial services	6/10/15	25/40/60	0.4/0.7/1.0	0.6/0.75/0.9	AI share of ∼$1.5T banking/insurance IT and ops spend; model-risk governance
Customer service / CX	5/8/12	25/40/60	0.5/0.8/1.2	0.35/0.5/0.65	10–15% of $350B contact-center labor displaced; vendors capture a share
Public sector / defense	5/8/12	25/40/60	0.3/0.5/0.8	0.7/0.85/1.0	∼5% of ∼$700B government IT; sovereign carve-out applies
Healthcare / clinical	4/6/9	20/35/50	0.3/0.5/0.8	0.5/0.65/0.8	Ambient scribes, prior-auth, coding; liability and procurement pace
Autonomous fleets	5/8/12	16/27/43	0.3/0.5/0.8	0.3/0.45/0.6	Fleet software market forecasts [101]; NHTSA and chassis cycles; on-vehicle compute
Generative video / gaming	5/8/12	17/26/37	0.4/0.7/1.0	0.8/0.9/1.0	Cloud GPU COGS vs consumer budgets [103]
Legal & compliance	3/5/8	12/20/30	0.3/0.5/0.8	0.5/0.65/0.8	∼2–3% software share of $950B legal services; verification rules
Science / R&D	2/4/7	10/25/45	0.4/0.7/1.0	0.7/0.85/1.0	∼5% of $300B pharma R&D plus materials, climate, engineering
Factory / robotics software	2/4/6	8/15/25	0.3/0.5/0.8	0.3/0.45/0.6	Robot stock × software fee [100]; Asian wage floor; edge inference
Eldercare / assistive	0.5/1/2	3/6/12	0.3/0.5/0.8	0.1/0.15/0.25	160M OECD seniors × penetration × fee; 85% on-device
Sum (medians)	**∼205**	**∼740**		**∼0.76**	

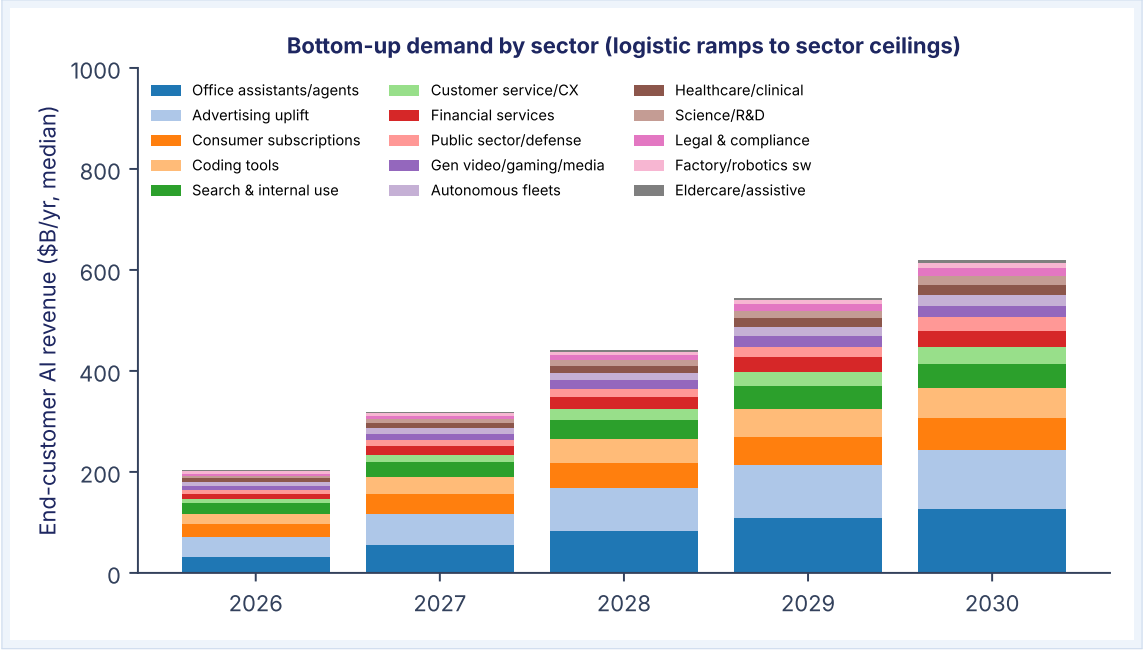


Figure 4: Bottom-up end-customer AI revenue by sector, 2026–2030 (medians). Four sectors carry three-quarters of the total.

Table 7: Bottom-up demand ($B; median with P10–P90) and implied year-on-year growth

	2026	2027	2028	2029	2030
End-customer revenue	204 (191–218)	321 (291–355)	445 (388–513)	551 (469–648)	626 (526–744)
Infrastructure receipts ($\sum \theta_s R_s$)	160 (148–172)	250 (225–277)	344 (299–398)	423 (360–499)	479 (402–570)
Implied growth, end-customer		57%	39%	24%	14%

Growth as a consequence, not an input. Growth is high while the large sectors are far from their ceilings and falls as they approach them. Three readings.

- First, the sectors are consistent with the observed 2026–27 pace: 57% growth into 2027 is in line with the labs' guided deceleration [14], so the bottom-up model is not a bear case in the near term.
- Second, growth decays fast because the four large sectors approach ceilings set by seat counts, IT budgets and advertising yields, not by model capability.
- Third, the cloud-capture share matters as much as the ceilings: a quarter of end-customer revenue never reaches the infrastructure layer — it stays with labs as margin, runs on-device, or accrues to integrators.

6.1 Structural limits on the ceilings

Startups fail, chips move onto phones and laptops, and routine work moves to small models: each caps what the cloud collects.

Startup mortality. Of the 2024–25 funded cohort, roughly 40% had failed within 24 months and the trajectory points to ∼80% by end-2026[v] [98]. When labs ship native features, single-feature wrappers collapse; their API spend is the low tail of the enterprise pool.

The local-silicon siphon. About 1.2B smartphones and 250M PCs ship annually with 40–80 TOPS NPUs. If 350M knowledge workers issue ∼15 routine text tasks per day at ∼500 tokens each, routine volume is

$$350\text{M} \times 15 \times 250 \times 500 \approx 6.6 \times 10^{14} \text{ tokens/yr},$$

worth of order $70–330B/yr at routine-model prices of $0.10–0.50 per million tokens. If 60–85% of that runs on-device or on private small models, the cloud loses $40–280B/yr of potential base-load. On-device inference is not free (device cost, power, governance), but its marginal price to the cloud is zero.

Frontier versus routine. Multi-step reasoning and complex synthesis are under ∼5% of enterprise token volume; the 90%+ that is summarization, drafting and formatting is exactly the share that distilled open-weight models and NPUs absorb.

7 Decomposing the Dominant Uncertainties

Nineteen loose inputs are broken into sourced parts, which shrinks the uncertainty and moves the answer against the build-out.

In brief

- Breaking nineteen loose inputs into sourced parts cuts the spread of the result by more than half, and moves the answer against the build-out rather than for it.
- What remains uncertain is mainly three things: the labs' compute-cost share, how fast firms adopt AI, and how big the assistant market gets.
- Budgets bound the answer, and those budgets are themselves being reshaped by AI.

Left as single judgment ranges, three inputs would carry most of the model's uncertainty: the 2026 revenue base (64% of top-down variance at a Triang(160, 210, 300) range), the cloud-capture share θ (18%), and the advertising ceiling (51% of bottom-up sector variance).

An estimate improves in exactly one way — by decomposing its loosest factor into tighter, separately sourced ones — so this section does that for those three and for a further sixteen, and then draws what-if curves over what is left.

Every decomposition, both directions. Each decomposition is reported with the undecomposed range it replaces, and with the direction it moved the central estimate, because a decomposition that only ever tightens in one direction would be a sign of motivated choices. Appendix G appraises every input in turn — what is known, the range chosen, the likely direction of bias in its source, and what would improve it — so that any reader can substitute a better-informed range.

7.1 The 2026 revenue base

Built from seven sourced components, the 2026 base is about $179B, well below the $210B a single guess would give.

Two things happen relative to a single judgment range of Triang(160, 210, 300). The uncertainty falls by a factor of 2.5, because the two largest components are public quarterly figures rather than a guess. And the central value falls from $210B to $179B, because run-rates overstate calendar bookings and because gross-basis reseller accounting double-counts. Decomposition does not only tighten an estimate; it can move it, and here it moves against the build-out.

7.2 The cloud-capture share

Table 8: Calendar-2026 end-customer AI revenue, decomposed ($B; triangular min/mode/max)

Component	Range	Basis
Anthropic, booked 2026 (gross basis)	53 / 56 / 60	H1 $16.3B filed (S-1) [123]; Q3 $16.8B reported, not filed [124]; Q4 $20–24B as growth slows (v28; v27: 50 / 57 / 65)
OpenAI, booked 2026	29 / 32 / 35	Run-rate $21B (Dec. 2025), ∼$33B (May), >$40B (Aug.) [13, 16, 19]
Other labs (xAI's Grok, Mistral, Cohere, Perplexity, non-US)	4 / 7 / 12	Sparse disclosure[v]
Hyperscaler AI services excluding lab hosting and reseller pass-through	25 / 35 / 45	Microsoft AI run-rate >$37B less Azure-OpenAI hosting; AWS AI >$15B less Bedrock pass-through; Google Cloud AI less Vertex pass-through [6, 7][v]
AI-attributable advertising uplift (Meta + Google)	25 / 40 / 55	Meta: 8–12% relevance/pricing lift disclosed [17] on ∼$230B ads = $18–28B; Google assumed comparable magnitude with less disclosure, $10–25B
Consumer, search and internal use not already in lab revenue	8 / 15 / 25	Gemini, Microsoft Copilot consumer, AI search monetization, internal productivity[v]
Overlap correction	−15 / −8 / 0	Anthropic books Bedrock and Vertex end-customer spend as gross revenue [19], so a portion of "AWS AI" and "Google Cloud AI" is the same dollar counted twice
Sum	**179 (P10 168, P90 191)**	$\sigma_{\ln} = 0.051$, versus 0.13 for the undecomposed Triang(160, 210, 300)

About 82 cents of each customer dollar reaches the infrastructure owners; the labs keep the most, and their margin is the number to watch.

The cloud-capture share, θ — the fraction of end-customer revenue that reaches the infrastructure owners — is a channel-weighted average of four shares that are each better known than the aggregate: the lab channel (∼50% of the base), where infrastructure receipts are the labs' compute cost as a fraction of revenue — OpenAI at ∼39% gross margin and ∼$13B of 2026 Azure spend on ∼$29B of bookings [16], Anthropic's margin undisclosed[v]— giving θ_{lab} ∼Triang(0.50, 0.65, 0.85); hyperscaler direct services (∼20%), θ ∼Triang(0.9, 1.0, 1.0); advertising (∼22%), $\theta = 1$; and consumer/other (∼8%), Triang(0.75, 0.85, 0.95).

The weighted result is θ ∼0.82 (P10–P90 0.77–0.87), $\sigma_{\ln} = 0.045$ versus 0.072 before. What remains uncertain is one number — the labs' compute-cost share — and Figure 9 sweeps it.

7.3 The advertising ceiling

AI lifts advertising by roughly 8–18% of a $700–950B pool — large, but a lift, not a new market.

The 2030 ceiling decomposes as (Meta ads 2030 ∼Triang(330, 380, 430)) + (Google ads 2030 ∼Triang(380, 450, 520)), both from 2026 levels [18] at 10–15%/yr, times an AI-attributable lift ∼Triang(0.08, 0.12, 0.18) anchored on Meta's disclosed 8% click and 15.7% conversion lifts and 12% price-per-ad growth [17], plus AI-native formats ∼Triang(10, 25, 60).

Result: $136B (P10–P90 $111–164B), $\sigma_{\ln} = 0.15$ versus 0.22 before. Meta's Advantage+ run-rate of $75B [17] is not an uplift figure — it is revenue flowing through an AI-managed product — but it bounds the base on which any lift can act, and it is consistent with the range.

7.4 The common adoption factor

One shared factor — how fast firms really adopt — moves every sector together, and is why the errors do not cancel.

The factor that correlates the sectors ($\sigma_{\ln} = 0.14$) is not one thing. It splits into an IT-budget cycle component — enterprise IT spend growth of 8–10%/yr with a well-forecast variance, $\sigma \approx 0.05$ [20][v]; an inference price-deflation component — revenue is volume times price, and price per token for fixed capability has fallen ∼10×/yr [15] while volume has risen faster, net $\sigma \approx 0.08$; and a residual — whether agentic systems work well enough to be trusted with whole workflows, and how fast enterprises reorganize around them — $\sigma \approx 0.10$.

The first two are improvable with data and are largely observable by 2027. The third is the irreducible core of the whole debate, and it is the axis of Figure 7.

7.5 Facility opex

Running costs are about 6.65% of capital a year: power, staff, tax, insurance and network, each sourced.

The supply side's loosest input after the base was facility opex, at Triang(0.05, 0.08, 0.11) of in-service gross. It decomposes into power — PUE ∼Triang(1.12, 1.22, 1.35) × 8,760 h × utilization Triang(0.65, 0.80, 0.92) × tariff Triang($0.075, 0.10, 0.13)/kWh [89], divided by all-in capex of Triang(38, 45, 55) $M per MW of IT load — giving ∼1.9% of gross per year; staffing and maintenance Triang(1.2, 2.0, 3.0)%; property tax and insurance Triang(0.7, 1.0, 1.4)%; network and bandwidth Triang(0.5, 1.0, 1.6)%; other Triang(0.3, 0.6, 1.0)%.

Sum: 6.65% (P10–P90 5.9–7.4%), $\sigma_{\ln} = 0.085$ versus 0.157. The central value falls as well as the spread — a decomposition that moves in the build-out's favor, as roughly half of them should if the choices are not motivated.

7.6 The assistant ceiling

Paid AI office seats, not hype, cap the largest sector: about $150B by 2030, with the widest range of any input.

What the ceiling means. The most that enterprises could spend in 2030 on AI assistants and the agentic workloads built on them, given seats, prices and IT budgets.

The seat count is growing fast. Microsoft disclosed 15M paid M365 Copilot seats in January 2026, 20M in April and more than 30M by July, with the largest single deal at 740,000 seats [26, 52].

But a paid seat is not a used seat. Three qualifications keep the number honest:

- **Bundling.** The 10M seats added in one quarter coincided with the May launch of the $99 E7 suite that bundles Copilot into E5, the July base-price increases, and usage-based billing alongside per-seat licences [56, 57].
- **Use.** Microsoft reports weekly engagement matching Outlook and Teams and satisfaction doubling over three quarters; independent estimates put weekly active use at 20–30% of assigned seats in some large deployments [56].
- **Price, not seats.** The commercial seat base grew 6% while Microsoft 365 commercial cloud revenue grew 17%: the growth is price and mix [55, 58].

So the model treats paid seats as the upper bound on adoption, and carries the *active share* — Triang(0.25, 0.45, 0.70) of paid seats — as a secondary variable. A usage disclosure would settle it.

The ceiling, step by step. Five factors, each bounded:

1. **Seats today:** paid seats across all vendors, mid-2026, Triang(35, 42, 50)M.
2. **Seat growth:** Triang(1.3, 1.6, 2.0)× a year in 2027–28, slowing after, and capped at 250M — about 55% of the Microsoft 365 and Google Workspace commercial base.
3. **Price:** Triang($25, 30, 36) per seat per month.
4. **Agents on top:** agentic and workflow consumption at Triang(1.2, 2.0, 3.0)× the seat revenue.
5. **Budget cap:** the whole limited to an AI share of Triang(3, 4, 5.5)% of ∼$6.5T of 2030 IT spending, about $270B.

The result: about $150B, with a wide range. The median is $150B (P10–P90 $100–229B).

Why the range stays wide. This decomposition does not tighten the estimate — its spread ($\sigma_{\ln}$) is 0.31, against 0.20 for a single judgment range — because seat growth is genuinely uncertain, and a judgment range would understate that. It is the right outcome: the assistant ceiling is the loose axis, and it now has a floor anchored in data and a hard cap anchored in budgets.

7.7 Silicon life: the cutoffs

Physics sets the floor and accounting the ceiling: a working life between about 2.5 and 6.5 years.

Silicon life does not decompose further, but it is bounded on both sides by evidence: below by the thermal-acceleration physics of Section 4 (an economic life under 2.5 years would imply failure rates no operator has reported), above by the operators' own accounting lives of 5–6 years (an economic life beyond the accounting life would mean the companies are over-depreciating, which none has claimed). The training/inference fleet mix (Section 4) gives an effective 4.2 years, inside those cutoffs.

7.8 The feasibility cutoff: a budget that is itself being torn up

Enterprise software and services budgets bound what AI can earn — and those budgets are themselves shrinking under AI.

In brief

- AI revenue has to come out of budgets; the enterprise software and IT services budgets set the outer limit.
- Those budgets are being reshaped by AI itself: seat-priced software is deflating, agents replace seats, and buyers outside the US are leaving US vendors.
- The money is not lost but moved — to outcome-priced AI solutions, agents and integrators; the model moves 12–32% of the pool by 2030.
- Incumbents can raise prices to hold revenue, but only converting seats to paid AI use offsets seat loss.
- Result: a feasible band for 2030 AI revenue of about $920B–$1.31T, against which the paper's probability map is drawn.

A first-pass cutoff — 8% of total IT spend plus the advertising and consumer caps, ∼$810B, drawn as a line — would rest on an assumed share. A second pass would take Gartner's 2026 enterprise software ($1.44T) and IT services ($1.87T) [22], grow them at 7–13%/yr, and apply an AI share; that treats the pool as stable and Gartner as reliable, and neither holds.

Why a forecast budget is not enough

Gartner revised its 2026 IT-growth forecast from 10.8% in February to 14.2% in July [21, 22] — a 3.4-point swing in five months on the same year — which is the precision such forecasts deserve, and the pool itself is being reorganized by the very technology the paper is pricing. Three things are happening to it at once.

Three forces reshaping the budget

Seat-priced software is deflating. Between January and April 2026 the enterprise software sector lost roughly $2T of market value — $285B in one 48-hour stretch after Anthropic's Claude Cowork launch — in what JPMorgan called the largest non-recessionary software drawdown in over thirty years [36, 37].

Atlassian reported its first-ever decline in enterprise seat counts; Salesforce fell ∼30% and Adobe ∼36% year-to-date [38]. The market's reading is the paper's: if an agent does the work of ten people, the customer buys one seat, not ten.

Agents replace seats. Gartner itself projects 40% of enterprise applications carrying AI agents by end-2026, from under 5% in 2025 [39]. Per-seat application software is ∼55% of the software pool; the model gives it 2026–30 growth of Triang(-6, 0, $+5$)%/yr, against Triang(4, 8, 12)% for infrastructure software, databases and security.

Customers paying Microsoft for extended security updates to *avoid* Windows 11 are the small-scale version of the same fact: incumbents are collecting rent on products their customers would rather not use, and rent is the first thing a budget cut removes.

Buyers outside the US are displacing US vendors. In April 2026 France's DINUM announced a national migration of government workstations from Windows to Linux; Schleswig-Holstein is mid-way through a full exit from Microsoft Office, Exchange and Windows; Denmark is following; France's national health fund is moving 80,000 staff to sovereign tools [40].

The trigger was not price but law: Microsoft's disabling of the International Criminal Court prosecutor's account on a US order made the CLOUD Act's reach concrete, and a 2026 survey of 1,818

IT decision-makers in Germany, France and the Nordics found the share actively implementing European software doubled from 20% to 40% in a year, with 87.5% of German respondents favoring European products in critical infrastructure [41].

Sovereignty: Europe and China. Europe is ∼23% of the global pool; the model moves Triang(10, 20, 35)% of it away from US vendors by 2030. China is ∼10% and is already 70–95% domestic. The IT services pool, the largest single component, grows at Triang(−2, 3, 7)%/yr as AI removes consulting hours faster than implementation work adds them.

Where the money goes

The money moves from seats to solutions. What the seat and services deflation does not do is disappear. The dollars are reallocated: to outcome-priced AI solutions, to agents that replace the seats, to the labs and integrators that sell them. The model puts the reallocated share of the accessible pool at Triang(12, 20, 32)% by 2030, plus Triang(2, 4, 7)% of genuinely new AI spend.

The incumbent's dilemma

In brief

- A software vendor that charges per seat earns seats × price.
- AI agents and buyers leaving for European or domestic tools cut the seats, so the vendor raises the price.
- But every price rise pushes some customers to leave: at typical rates, an 8% a year price rise only holds revenue flat.
- Only one thing really offsets lost seats: getting customers to pay for AI on top. That is the same adoption question the whole paper turns on.

The move: raise the price, bundle the AI. On July 1, 2026 Microsoft raised Microsoft 365 commercial prices worldwide — up to 43% on some plans, E3 to about $39 per user per month, Windows Enterprise up — and bundled Copilot Chat and Security Copilot into the suites as "value expansion" [42–44]. Standalone Copilot seats, which customers had shown little appetite for, were folded into the base. Microsoft is the example because it discloses the most; Salesforce, Adobe, ServiceNow and SAP face the same arithmetic.

Why it only holds ground. Revenue is seats times price. If prices rise by p a year and each step of price rise loses a share ϵ of seats (the seat-loss elasticity), revenue after four years is $(1+p)^4\,[1-$

$\epsilon((1+p)^4-1)]$ times today's, before any other seat loss. With $\epsilon = 0.35$ and seats already falling 3% a year, an 8% annual price rise keeps revenue roughly flat, and no more (Figure 5, left).

Microsoft 365, worked through. The inputs are widely quoted but unverified[v]:

- **Today:** about 450M paid seats at about $21 a month — some $113B in 2026.
- **Seats:** Microsoft's own figures show seats still growing 6–7% a year [55]; the model slows that to between -4% and $+4\%$ a year to 2030 as agents and sovereignty exits bite, with 3–15% of seats lost to sovereignty by 2030.
- **Price and response:** prices up 5–12% a year; seat-loss elasticity 0.15–0.60.
- **Result:** base-suite revenue of about $110–140B in 2030 on 350–420M seats — near or a little above 2026, held up mainly by today's seat growth.

The number to beat. The observed 6–7% seat growth is what the paper's seat-deflation argument has to overcome, and it has not yet. What would change the picture is paid AI on top: if 12–35% of remaining seats pay for Copilot by 2030 (from about 6.5% today, 30M of some 460M), total Microsoft 365 revenue is roughly $130–170B — above 2026, but short of an 8% a year trend in most draws (Figure 5, right).

The lesson for every seat-priced vendor. Raising the bill for AI features does not offset lost seats; only converting seats into paid AI use does. That conversion is the same adoption question this paper cannot settle from 2026 data, which is why the argument lives in the assistant ceiling and the adoption factor, not in the size of the budget.

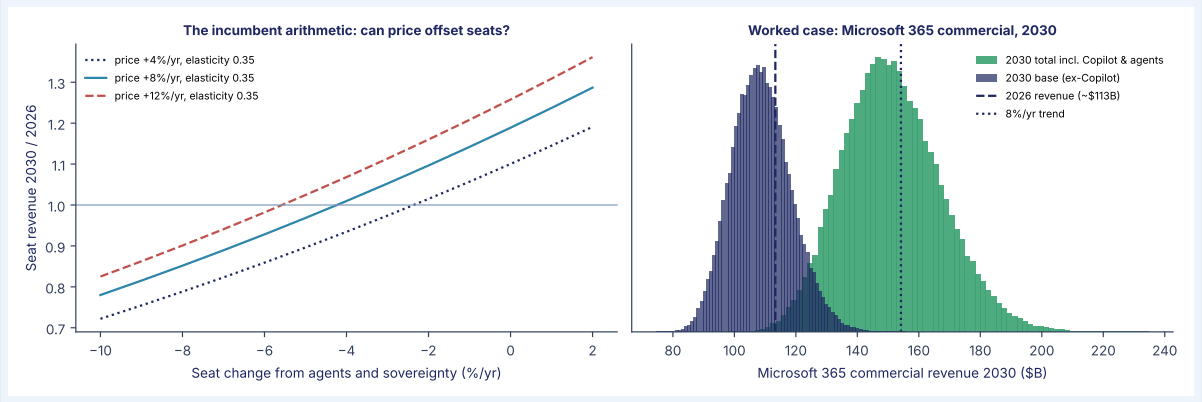


Figure 5: Left: seat revenue in 2030 relative to 2026 for a seat-priced vendor, by seat decline and price growth, at a seat-loss elasticity of 0.35. Right: Microsoft 365 commercial as an illustration on unverified inputs — the base suite is more likely than not below 2026 revenue by 2030; the total holds up only if Copilot attach rises fivefold.

The resulting band

Result. The 2030 pool is $3.75T (P10–P90 $3.5–4.0T), not the $4.85T that 7–13% growth would give; the part accessible to US vendors is $3.25T; the AI share of it is ∼25% (20–32%); the enterprise AI cap is $825B ($650B–$1.03T); with advertising ($140–200B) and consumer ($80–130B) caps the total feasibility band is $1.10T (P10–P90 $920B–$1.31T).

That is almost exactly the band a stable, growing pool with a 15% AI share would give — the two errors cancel — but the composition is entirely different, and the composition is the point.

The total holds; who receives the dollar changes. Seat-priced incumbents lose it; European and Chinese providers keep more of it at home (the displacement enters the demand chains as a ramp on the sovereign-exposed sectors, Section 6); and the largest single loser is the company that is both the largest seat-priced vendor and the most exposed to the sovereignty exit — Microsoft, whose AI receipts grow while its conventional Office, Windows and Azure base is being cut from both sides. The band is drawn as a band, not a line, in Figure 22.

What is still loose

Two secondary variables. The reallocation share (12–32% of the accessible pool moving to AI solutions) and the seat-priced SaaS growth rate (-6 to $+5$%/yr) are the loosest terms in the band and neither can be pinned from 2026 data: the first will be visible in Gartner's and the vendors' 2027 category reporting, the second in seat-count disclosures over the next four quarters.

Held at the centre, swept separately. Rather than let them hide inside the band they are treated as *secondary variables* — held at their central ranges in the base case and swept explicitly in Figure 6. The reading is that the plateau's 50% contour (∼$950B) stays inside the band unless the reallocation share falls below ∼12% *and* seat software contracts at 6%/yr with heavy European displacement; the composition changes far more than the total.

7.9 The non-AI capex baseline

About $130B of the 2023 spending was not AI, and the model subtracts it, growing it slowly.

The $162B the five companies spent in 2022 [1] decomposes by company — Amazon fulfillment and transport ∼$36B, AWS non-AI ∼$28B, Microsoft ∼$24B, Alphabet ∼$31B, Meta ∼$32B, Oracle ∼$4B[v]. Growing that figure forward at an assumed 0–8%/yr would give ∼$190B for 2026. The filings constrain it lower (below); the by-company split is what the constraint is applied to.

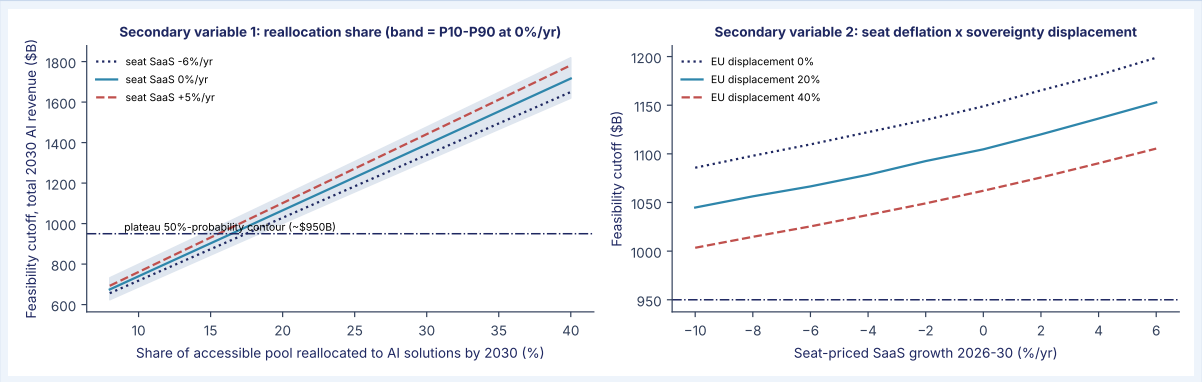


Figure 6: The two secondary variables in the feasibility band. Left: the cutoff versus the share of the accessible pool reallocated to AI, for three seat-software growth rates. Right: the cutoff versus seat-software growth, for three levels of European displacement of US vendors. The dash-dot line is the plateau's 50%-probability contour.

7.10 Energization lag, by component

Chips are installed within months; buildings and power take one to two years, so cost arrives in two waves.

A single lag Triang(0.3, 0.5, 0.7) hid two different physical processes. Accelerators ship and rack within one to three quarters of purchase (ℓ_{si} ∼Triang(0.5, 0.7, 0.9) in the spend year); shell, power and cooling take twelve to twenty-four months (ℓ_{sh} ∼Triang(0.2, 0.4, 0.6)). The effective lag is 0.56 with $\sigma_{\ln} = 0.11$ versus 0.17, and its variance share in Table 16 fell from 2% to under 1%.

7.11 Silicon life, by fleet

Training chips are retired after three to four years; inference chips last longer.

A single economic life hid the training/inference split. Training clusters are retired when a successor's throughput per watt makes the power slot worth more than the silicon (Section 4): Triang(2.5, 3.5, 4.5) years. Inference fleets serve fixed models and run longer: Triang(4, 5, 6). At a training share of Triang(0.35, 0.45, 0.55) the fleet's effective life (harmonic mean, since depreciation is $1/L$) is 4.2 years (P10–P90 3.75–4.6), $\sigma_{\ln} = 0.077$ versus 0.124 for the undecomposed Triang(3, 4, 5.5).

7.12 The consumer ceiling

Hundreds of millions use AI apps, but few pay: consumer revenue is about $60B by 2030.

Gemini's app reached 950M monthly users and Meta AI 1.2B by mid-2026 [25]; with ChatGPT and others, unique consumer users are Triang(1.3, 1.6, 2.0)B. Paid conversion Triang(4, 6, 8)% at Triang($20, 23, 26)/month gives $27B of subscriptions; free-tier advertising on Triang(0.8, 1.0, 1.3)B ad-eligible users at Triang($15, 25, 40)/user-year gives $27B; premium tiers Triang(5, 10, 15). Ceiling $64B (P10–P90 $55–75B), $\sigma_{\ln} = 0.12$ versus 0.18, and lower than the earlier $80B mode.

7.13 Six further decompositions, and a grid variable

Six more inputs are broken down, from the labs' compute share to the cost of capital, and a cap on how much new power the grid can connect.

Hyperscaler AI services excluding labs. Microsoft's >$37B AI run-rate [6] decomposes into Azure hosting of OpenAI (∼$13B, already in the OpenAI channel [16]), M365 Copilot seats (20M × $25–36 × 12 ≈ $7B [26]), GitHub Copilot (∼$2B), and other Azure AI services (remainder). AWS AI (>$15B) less Bedrock pass-through, and Google Cloud AI less Vertex pass-through, add $8–12B each. Calendar-2026 hyperscaler ex-lab revenue: $39B (P10–P90 $35–42B), $\sigma_{\ln} = 0.067$ versus 0.118. The 2026 base becomes Triang(161, 179, 198) after the v28 lab revisions.

The lab channel's infrastructure share, by lab. OpenAI's compute purchases — ∼$13B on Azure plus $6–12B with Oracle and CoreWeave — against ∼$29B of bookings give 0.7–1.0; Anthropic's margin is undisclosed but bracketed by reported 2024–25 figures[v] at a compute share of Triang(0.45, 0.55, 0.70); other labs Triang(0.6, 0.7, 0.85). Revenue-weighted: $\theta_{\text{lab}} = 0.635$ (P10–P90 0.59–0.69), $\sigma_{\ln} = 0.058$ versus 0.108. Overall θ becomes Triang(0.77, 0.815, 0.86).

The non-AI baseline, constrained by 2023. Total capex was flat at $161B in 2023 while AI purchases of $20–40B began [1], so the non-AI baseline must have *fallen* to ∼$130B in 2023 (Amazon cut fulfillment capex that year). Growing from there at Triang(2, 6, 10)%/yr gives $156B for 2026 (P10–P90 $145–168B) and ∼$197B by 2030 — lower than the ∼$190B an assumed growth from 2022 would give. The AI-attributable stock is correspondingly larger. A constraint from a filing beats a growth assumption, whichever way it cuts.

Silicon share, from Nvidia. Nvidia's $300B data-center run-rate [9] at a Big-5 share of Triang(0.45, 0.55, 0.65) is $165B; server integration, custom accelerators (TPU, Trainium, MTIA), memory, networking and storage add roughly as much again. Against AI-attributable capex of ∼$620B — the share must be taken against AI capex, not the $780B total, or it comes out implausibly low — the silicon share is Triang(0.45, 0.52, 0.60).

Cost of capital, by CAPM. Risk-free Triang(4.0, 4.3, 4.6)%, equity premium Triang(4.5, 5.0, 5.5)%, levered beta Triang(1.1, 1.2, 1.35), pre-tax debt cost Triang(5.5, 6.5, 7.5)%, equity weight Triang(0.75, 0.82, 0.90), tax 21% [84]: $r = 9.45\%$ (P10–P90 9.0–9.9%), $\sigma_{\ln} = 0.038$ versus 0.058.

The central cost of capital fell about a point, from 10.5% to 9.45%, and the 2030 carry fell ∼$10B.

Grid energization capacity. Capital can only earn once it is *energized*, and the grid limits how much can be connected in a year. Global AI data-center interconnection capacity of Triang(22, 30, 40) GW/yr of IT load [90, 91][v] at Triang($38, 45, 55)M per MW is $1.15–1.68T/yr of energizable capex.

Capex above it is deferred a year and carries return but no depreciation or opex. It does not bind on a plateau; it binds in ∼5% of arms-race draws, where it *lowers* the near-term carry by delaying depreciation while the capital sits idle. It is in the model because a physical ceiling should be, and because it becomes decisive if capex exceeds ∼$1.3T/yr.

7.14 Readiness: consent, water, and siting

Local opposition, water and power now delay and cancel projects: about $130B blocked or delayed in the first quarter of 2026 alone.

In brief

- Water and electricity bills are the stated grounds; the record on bills so far cuts the other way.
- The model defers 10–35% of each year's build by a year and adds 2–9% to building cost.
- The effect is to shift the cost later, not to remove it.

A funded, grid-connected project must also be *allowed* to be built, and the record says that constraint now binds. Data Center Watch counts $156B of US data-center projects blocked or delayed by local opposition in 2025 and $130B in the first quarter of 2026 alone — 75 projects, roughly the whole of 2025 in three months [27, 28].

Active opposition groups more than doubled to 833 across 49 states; more than 300 state bills were filed in six weeks; statewide moratoria were proposed in 14 states and New York enacted a halt on large new facilities in July 2026 [27, 30].

Cancellations and polling. Cancellations rose from 6 in 2024 to 25 in 2025 and more than 20 in early 2026, including a $14B Arizona site withdrawn and a $24.7B Virginia site in litigation [30]. Ipsos polling moved from about half of Americans opposing a data center near them in late 2025 to roughly 70% by mid-2026 [28, 29].

The stated grounds are the ones this paper's supply section already prices in other forms: electricity and ratepayer bills, water, noise, diesel backup, and opaque permitting.

Electricity bills, so far. On bills specifically the record cuts the other way so far: Watten, Bistline and Blanford find that data-center load *lowered* average residential rates by about 6% over 2019–24 by spreading the grid's fixed costs [74]; the opposition is nonetheless real and growing, and the deferral variable is calibrated on what communities do, not on what rates did.

Europe reached this point first: Dublin [91] and Amsterdam [92] imposed connection and zoning limits in 2021–22, Frankfurt and Paris face grid and land constraints, and the Netherlands has restricted hyperscale sites nationally.

China is the exception. Siting is a state decision, and the *East Data, West Computing* program directs capacity to the western provinces where power and land are cheap and local objection is not a factor. The deferral variable below is calibrated on US data and applied to the whole Big-5 stock, which is conservative for the Chinese portion (small for these five companies) and roughly right for Europe.

Water, as a Fermi chain. A 2030 AI fleet of Triang(60, 80, 110) GW at Triang(0.65, 0.80, 0.92) utilization draws ∼570 TWh/yr; at a water-usage effectiveness of Triang(0.3, 1.0, 1.8) L/kWh and an evaporative share of Triang(0.4, 0.6, 0.8), direct consumptive water is ∼90 billion gallons/yr (P10–P90 53–141), before the 3–4× larger indirect draw of the power generation behind it.

Why is the water not simply recycled? Evaporative cooling works *by* evaporating it: the heat leaves as vapor, and that water is consumed, not returned.

Water and heat. Closed-loop and dry cooling return the water but reject the heat to air instead, which takes 5–10% more power. For scale: US freshwater withdrawals are about 320 billion gallons per *day*, so 90 billion gallons per *year* is under 0.1% of the national total, and far less than agriculture or thermoelectric power plants.

The issue is local: a 500 MW campus draws like a town of 50,000 people, from one aquifer, in the dry regions where land and power are cheapest.

Where water decides. Arizona, Aragon and the Dutch Randstad refuse evaporative cooling for this reason. Operators are not exaggerating their efficiency work — WUE has fallen steadily — but the concentration, not the total, is what communities object to.

Three variables. (i) A siting and consent deferral f_{delay} ∼Triang(0.10, 0.20, 0.35): the fraction of each cohort from 2026 pushed a year by permitting, litigation or relocation, treated like the grid deferral — it carries return but not depreciation. The mode is set from the ratio of disrupted project value to annual pipeline ($130B/quarter against a US pipeline of order $1T), discounted because most delayed projects eventually proceed elsewhere.

(ii) A shell cost uplift κ_{site} ∼Triang(1.02, 1.05, 1.09) for community-benefit agreements, water mitigation, dry cooling, private generation and relocation to friendlier jurisdictions [29]. (iii) A

cooling opex uplift u ∼Triang(0, 0.03, 0.06) where evaporative cooling is refused.

Effect. The three variables shift the carry rather than remove it: 2027 falls by ∼$20B (deferred cohorts), 2030 rises by ∼$15B (deferred cohorts arriving with higher shell cost and opex). Break-even g^* is unchanged at 49%; the bottom-up 2030 deficit is ∼$15B larger and z about 0.2 more negative than without the friction; rationalization's 2030 P(profit) is roughly ten points lower, because the cut path's late cohorts are the ones deferred into 2029–30. Readiness friction is, on net, a bear variable for the carry test and a bear variable for the revenue test, since the capacity it delays cannot serve demand in the year it was meant to.

7.15 What remains, and the what-if curves

After all the decompositions, the doubt sits in three places: how fast firms adopt, how big the assistant market gets, and the labs' compute-cost share.

After nineteen decompositions the top-down root-sum-square falls from 286 to 104 (Table 16), and the residual uncertainty sits in three places: the residual adoption/capability factor, the assistant ceiling, and the labs' compute-cost share. Each has a cutoff of its own — the IT-budget share for the first two, the labs' reported gross margins for the third — and Section 17.5 maps the probability of profit over the two that matter most.

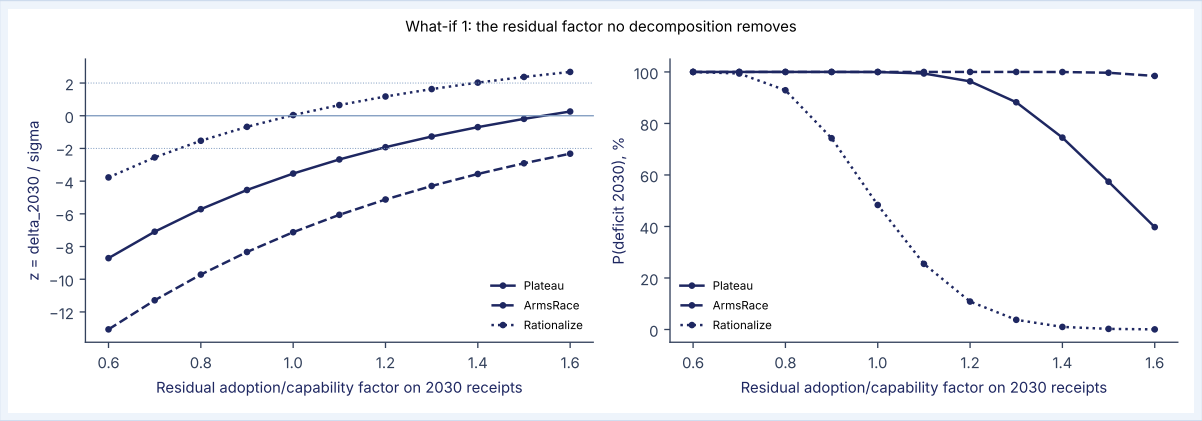


Figure 7: What-if 1. The 2030 z-score and P(deficit) as the residual adoption/capability factor scales bottom-up receipts from 0.6 to 1.6, by capex path. The plateau path crosses $z = 0$ only above ∼1.5 — receipts 50% above the sector chains' central estimate.

How robust is the sign? The sign survives each residual variable moved alone across its plausible range. What it does not survive is the residual factor above ∼1.5 on a plateau — the sector chains being wrong by half in the same direction at once.

No pair of ceilings does it alone (Figure 8); it takes ceilings, ramp rates and cloud-capture shares moving together, which is a single statement about agentic adoption in the enterprise. That is

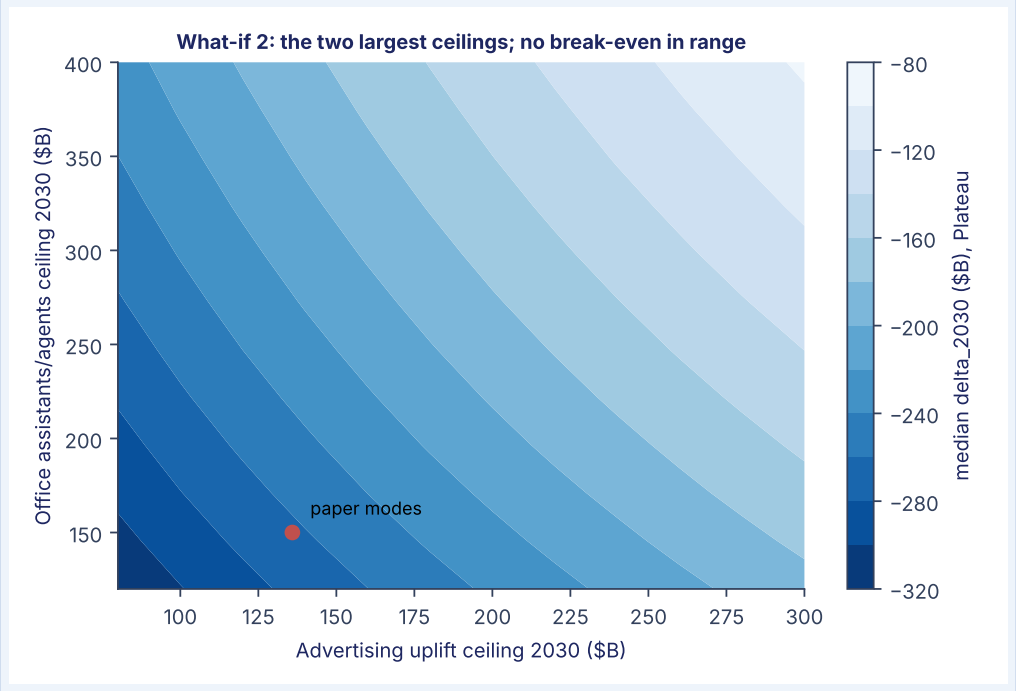


Figure 8: What-if 2. Median 2030 deficit (Plateau) across the two ceilings that could close the gap. The dot is the paper's modes. No combination in the plotted range reaches break-even; even the largest ceilings in the plotted range leave a median deficit near $-\$60$B, because by 2030 the logistic ramps have reached only 60–80% of ceiling and assistant receipts are ∼60% of assistant revenue.

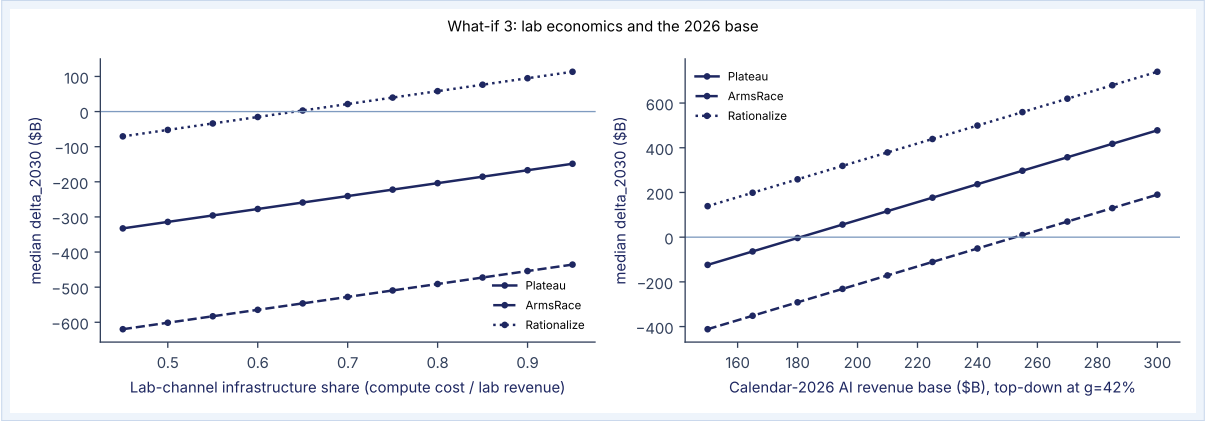


Figure 9: What-if 3. Left: 2030 deficit versus the labs' compute-cost share (the only loose part of θ). Right: top-down 2030 deficit at $g = 42\%$ versus the 2026 base across and beyond its decomposed range.

where this paper's argument and the bull case actually disagree.

8 Digital Sovereignty and Grid Friction

Countries keeping data at home duplicate capital and carve demand out of the US clouds; grid queues strand chips before they earn.

In brief

- Rules that keep data at home force duplicate data centers that run below capacity.
- Countries building their own AI carve demand out of the US clouds: 15–35% in the sovereignty scenario.
- Grid connection queues of five to seven years strand chips before they can earn.

Capital duplication (κ_{sov}). Data-residency regimes (GDPR Chapter V, the EU AI Act, BSI C5, India's DPDP Act) [93–95] require in-jurisdiction processing for large classes of data, forcing smaller, under-utilized facilities in Frankfurt, Paris, Dublin, London, Tokyo and Riyadh in place of a few gigawatt sites in cheap-power regions. We model the resulting carry multiplier as $\kappa_{\text{sov}} \sim$Triang(1.1, 1.2, 1.3). This is an engineering judgment about utilization and scale, not a published measurement.

Demand carve-out (γ_{sov}). Procurement preferences for domestic champions (Mistral, Falcon, Bhashini) and air-gapped defense enclaves remove a fraction $\gamma_{\text{sov}} \sim$Triang(0.15, 0.25, 0.35) of the sovereign-exposed sectors (office assistants, CX, financial, healthcare, legal, public sector, science) from US hyperscalers.

Grid queues. Multi-year interconnection backlogs in PJM [90], Dublin's large-user connection constraint through 2028 [91], and Amsterdam's establishment restrictions [92] cap the physical velocity of deployment. Capital committed to sites that cannot energize is cash drag: it is in the installed base but produces no revenue. We do not model this separately; it cuts against the bull case.

Effect. Applying $\kappa = 1.2$, $\gamma = 0.25$ to the bottom-up model roughly doubles the 2030 plateau deficit (Table 15); in the top-down sweep it raises the plateau break-even for 2030 from 49% to ∼66%; the siting friction of Section 7 is the domestic form of the same constraint.

9 Circular Capital Flows

Some cloud revenue is the clouds' own investment coming back; the round trips are small, but the $190B of lab funding is not.

In brief

- The strict round trips are small, about $12B a year; the $190B of 2026 lab funding is the larger issue.
- The labs and the clouds fund, supply and compete with one another; the squeeze moves money between them, not from the customer.

Reported cloud revenue is not all exogenous demand. Where a hyperscaler's equity investment in a lab returns as that lab's cloud spend, the revenue is a round trip. Modeling the ecosystem as a directed graph, the circular revenue on a cycle is bounded by its minimum edge weight $\omega(e)$ (the dollars flowing along that edge), $F(C) = \min_{e \in C} \omega(e)$. Only the first three rows are round trips

Table 9: Circular versus merely non-recurring flows (annual, order of magnitude)

Flow	Class	Order	Basis
Microsoft ↔ OpenAI	Circular	∼$4B	Equity/credits returning as Azure consumption [78][v]
Nvidia ↔ CoreWeave	Circular	∼$3B	Equity and capacity backstops returning as GPU orders [96][v]
Amazon/Alphabet ↔ Anthropic	Circular	∼$3B	Convertible notes returning as Trainium/TPU consumption [11][v]
Multi-party (Oracle, CoreWeave)	Partly circular	∼$2–5B	Colocation and capacity swaps; edge weights not disclosed
Genuinely circular		**∼$1.2×10^10**	Triang(8, 12, 18) in the model
VC-funded startup API spend	Non-recurring	∼$1.5–2×10^10	Real cash, but ∼80% of the cohort fails within 2–3 years[v] [98]; modeled as the low tail of enterprise demand, not as circular
Oracle RPO backlog	Backlog	$3×10^11+	A contracted future obligation to non-investment-grade counterparties [97]; a collectability risk, not a loop

in the strict sense; the rest are real but fragile. The circularity that matters in 2026 is larger and sits outside this table: the ∼$190B of lab equity raised this year, a large share of which is spent on hyperscaler compute (Section 5).

Off-balance-sheet structures. As in the 1999–2001 telecom buildout, capacity is increasingly financed through SPVs with infrastructure funds (Blackstone, Brookfield, Blue Owl) and vendor-backstopped debt. This does not reduce the carry; it converts equity capex into debt service with DSCR tripwires that accelerate distressed liquidation when revenue undershoots.

9.1 Labs and landlords: partners, rivals, and sometimes the same company

The labs and the clouds fund, supply and compete with one another; who wins the squeeze moves the margin between them, not the gap with the customer.

Three relationships, not one. The frontier labs and the infrastructure owners are customers and suppliers, investors and investees, and competitors, often all at once. Which relationship dominates decides who keeps the margin on an AI dollar, and so decides the cloud-capture share θ.

Where they play nicely. The hyperscalers fund the labs, and the labs spend the money on the hyperscalers' compute (Table 9). Anthropic's S-1 now puts this in a filing: committed spend "substantially all of which is related to compute and infrastructure", reported as $111B to Google, $110B to AWS and $31B to Microsoft, noncancelable [123, 125].

The labs also resell through the clouds — Bedrock, Vertex — and book the end-customer spend gross [19]. For the infrastructure owner this is the comfortable case: guaranteed demand, partly paid with its own investment.

Where they squeeze each other. Each side is trying to take the other's margin.

- **The labs squeeze the landlords** by spreading their compute across several clouds and buyers' terms, so that no landlord can price as a monopolist; by building or leasing their own capacity; and by improving their own margins. Every point of lab gross margin gained is a point of θ_{lab} lost to the owners (Appendix G).
- **The landlords squeeze the labs** by building their own chips (TPU, Trainium, MTIA), which lowers their cost and caps what labs can charge; by training their own models and selling them on the same shelf as the labs'; and by bundling AI into products the labs cannot reach, such as search, office suites and advertising.

Where they are one and the same. Google and Meta are both lab and landlord: Gemini and Meta's models run on their own data centers, so for them $\theta \approx 1$ and there is no margin to argue over — but there is also no outside customer paying the carry. Their AI must earn its return through advertising and subscriptions, which is why the search slowdown of the third quarter matters (What Is New in Version 28).

What it does to the model. The paper carries the tension in one number, the lab channel's share $\theta_{\text{lab}} \approx 0.64$ (Section 7). If the labs win the squeeze, θ_{lab} falls and receipts fall with it; if the landlords win, the labs' margins stay thin and the labs need more investor capital, which is the circular flow above.

Either way the carry is paid from the same end-customer dollar: the squeeze moves the gap between labs and landlords, it does not close it. Noncancelable commitments shift the risk: if lab revenue

disappoints, the landlords are paid until the labs cannot pay. That is a credit question for 2028–30, not a revenue question for 2026.

10 Enterprise ROI and the Slack Trap

Time saved is not money saved: firms realize a fraction of AI's nominal savings, and that fraction is what pays the carry.

In brief

- Enterprises would need about $1.1T of real benefit in 2028 to justify their share of the carry.
- AI's savings come in fragments, need checking and get absorbed, so only about 28 cents of each dollar of nominal savings becomes cash.
- Controlled studies show real gains at the task level; the leak is between the task and the profit.

10.1 What enterprises must realize

In 2028 enterprises would need to realize about $1.1T of benefit to justify their share of the carry.

Take 2028 under Plateau: carry ∼$535B (Table 5). Enterprise buyers supply roughly 70% of AI revenue, so they must pay ∼$375B to hyperscalers and labs. Every dollar of software or token spend carries μ_{integ} ∼Triang(1.0, 1.5, 2.5) dollars of integration, so total enterprise outlay is ∼$0.95T, and with a required benefit margin $m \approx 0.2$ over cost for an unproven technology [85,86] — every firm applies a hurdle to new spending, and the hurdle is higher, not lower, for a technology whose payback is uncertain — enterprises must realize $B_{\text{req}} \approx \$1.1 \times 10^{12}$/yr of auditable benefit by 2028.

10.2 The labor-substitution floor

The $1.1T of benefit enterprises need is about 4% of world knowledge-worker pay — possible, but only if savings turn into cash.

Against a global knowledge-worker payroll of ∼$30T (1.05B workers at ∼$28.5k fully loaded) and a US pool of ∼$9T (62M at ∼$145k) [87,88], B_{req} is ∼4% of global payroll or ∼12% of US payroll

if the US bore it alone. Benefits need not be layoffs — revenue growth, avoided hiring through attrition, faster cycle times all count — but they must be auditable cash flow.

10.3 Four reasons realized yield is a fraction of nominal savings

Savings come in fragments, need checking, get absorbed, and managers protect their teams — so only about 28 cents per dollar becomes cash.

In brief

- Time saved comes in fragments that cannot be turned into fewer staff.
- Someone has to check AI's work; freed time gets absorbed; managers protect their teams.
- Together only about 28 cents of each dollar of nominal savings becomes cash.
- Controlled studies show real task-level gains; the leak is between the task and the profit and loss.

1. **Indivisibility.** Tools save fragments of tasks; thirty minutes a day across six workflows does not aggregate across ten employees into one dismissal. Avoided hiring through attrition is the realistic path, and it is slow.
2. **Verification.** While liability (SEC, FINRA, HIPAA, professional conduct) rests with human officers, human review is an irreducible fixed cost; labor shifts from generation to verification.
3. **Parkinson–Jevons rebound.** Cheaper output inflates the demand for output: three proposal variants, sixty-page reports, more meetings to digest synthetic overflow. Gross volume rises; cash flow does not.
4. **The manager's dilemma.** Compensation, prestige and political capital are indexed to headcount. Departments report "bandwidth expansion," not surplus payroll.

The lag has precedent, and the precedent is measured. Paul David's study of the electric dynamo found that factories took roughly forty years, from the 1880s to the 1920s, to reorganize around electric power before productivity responded, because the gain came from rebuilding the factory floor, not from the motor [63].

The personal computer arrived in 1981; US labor productivity growth ran at 1.4%/yr from 1973 to 1995 — Solow's 1987 paradox — and accelerated to 2.9%/yr only in 1995–2004, a fifteen-year lag that Jorgenson, Ho and Stiroh attribute to information technology once complementary investment had been made [64, 66]; Brynjolfsson and Hitt's firm-level work found returns to computers appearing over five to seven years and only where organization changed with them [65].

The adoption curve. The internet's contribution followed the same shape. The present wave is, by the aggregate data, at the start of that curve: the Census Bureau's business survey put AI use in production at roughly a tenth of US firms in 2025[v] [67], and no acceleration is yet visible in the productivity statistics.

What the evidence says at the firm level so far: an MIT study of enterprise generative-AI deployments in 2025 found that about 95% of pilots produced no measurable profit-and-loss impact, the gains concentrating in a small minority that reorganized workflows around the tool [31]; McKinsey's 2025 survey found most firms using AI somewhere but only ∼1% describing their deployments as mature [32].

Real gains at the task level. Where controlled studies exist the task-level gains are real — 14% more issues resolved per hour in a call center, larger for novices [33]; 26% more completed tasks with an AI coding assistant in a randomized trial [34]; 12% more tasks and 25% faster in a consulting-task experiment [35] — and none of those studies reports the headcount that was removed as a result.

The gap between task-level gains and firm-level cash is the slack trap's footprint, and it is the same footprint the ERP and office-software waves left: fractional time savings on the desktop, no matching line in the payroll.

Companies that do cut do it wholesale, in restructurings attributed to AI in the press release, and those show up in the labor data as ordinary restructurings; the paper's 1.5% displacement marker (Section 20) is what would distinguish the two. We formalize realized benefit as

$$B_{\text{realized}} = W\,\tau\,(1-\sigma_{\text{slack}})(1-\nu_{\text{verify}}) - C_{\text{severance}}, \tag{5}$$

where W is the payroll pool, τ ∼Triang(0.10, 0.15, 0.25) the nominal share of work time AI saves, $\sigma_{\text{slack}} \approx 0.65$ the share of that saving absorbed as slack, $\nu_{\text{verify}} \approx 0.20$ the share consumed by verification, and $C_{\text{severance}}$ one-time separation costs. These two coefficients are the paper's most consequential and least measured assumptions; they are judgments consistent with the J-curve literature [107], not measurements.

At the modes, realized yield is $0.28\,\tau$: a 15% time saving converts to ∼4% of payroll — the global requirement, but only over a full J-curve cycle of 8–12 years, against silicon lives of 3–5.

11 Last-Mile Services and Value Capture

Much of AI's value goes to buyers and to the integrators who fix the process, not to the cloud.

In brief

- A dollar of cloud tokens can produce 10 to 50 dollars of savings for the buyer: good for the buyer, little for the cloud.
- Most in-house AI projects fail, so firms turn to outside operators paid on results.

11.1 Where the surplus goes

Professional-services firms lose billings to AI; little of what they lose shows up as cloud revenue.

The $2.65T professional-services pool (consulting ∼$1.05T, accounting/audit ∼$0.65T, legal ∼$0.95T)[v] faces compression of billable hours (tax prep, audit workpapers, contract review) that puts of order 30% of billings (∼$0.8T) under deflation. Outcome-priced last-mile operators capturing 10–18% of realized savings under gain-share terms address a $80–140B/yr market, at high gross margins, using small fine-tuned open-weight models on modest hardware. Upstream token intensity of 1.5–3% leaves the hyperscalers $1–4B of that pool.

11.2 The 10–50:1 disconnect

A dollar of cloud tokens produces 10 to 50 dollars of savings for the buyer — good for the buyer, little for the cloud.

Contact centers illustrate the ratio. Global contact-center labor is ∼$350B. A plausible 2026–27 displacement is 5–10%, or $20–35B/yr (a figure of $80B, sometimes quoted, would imply a quarter of the global pool already gone, which the labor data do not show). The RAG and speech inference behind that displacement consumes $1–2B/yr of tokens.

The ratio is 10–35:1; Nordhaus's economy-wide 2.2% innovator share [108] corresponds to ∼45:1. Freight routing and travel administration show the same pattern but are mostly classical optimization, not AI tokens, and we no longer count them.

11.3 The talent trap and the timing chasm

Most in-house AI projects fail, so firms turn to outside operators paid on results, which delays cloud demand.

An in-house MLOps and agentic pod costs $3.5–5M/yr, and most internal proofs-of-concept do not

Table 10: The value-capture disconnect: realized savings versus upstream tokens (order of magnitude)

Workflow	Billing base	Realized savings, 2026–27	Upstream cloud tokens
Contact centers & support	∼$350B global labor	$20–35B/yr	$1–2B/yr (RAG, speech)
Corporate travel & admin	∼$1.4T business travel	$10–30B/yr overhead	Fractional (database triggers)
Tax prep, audit workpapers, contract review	∼$0.8T of billings under deflation	$40–80B/yr by 2028	$1–4B/yr (small fine-tuned models)
Freight & logistics routing	∼$2.6T US logistics	$50–100B/yr	Near zero (classical optimization, not LLM tokens; excluded from AI demand)

reach production (surveys put the figure above 70–80%[v]). CFOs are shifting to outcome-aligned external operators. The cycle — failed internal experiment, procurement, compliance validation — delays material revenue by 3–5 years, against a silicon life of 3–5 years. That is the timing chasm in one sentence.

11.4 Reconciling the slack trap with the leakage story

Slack dominates in high-liability work, leakage in high-volume work; both keep money away from the cloud.

These are not contradictory; they dominate in different places. In high-liability knowledge work (legal, finance, medicine, engineering) the slack trap dominates: savings are real but do not reach cash flow. In high-volume, low-liability process work (contact centers, claims intake, document routing) savings do reach cash flow, and there the leakage story dominates: the buyer and the integrator keep it. Neither regime routes much to the cloud meter.

12 Hardware Cycle and Commoditization

Cheaper chips, smaller numbers and open models keep cutting the price of AI work, so the same revenue needs less cloud.

In brief

- Cheaper chips, lower-precision maths and open models keep cutting the cost of AI work.
- Memory supply swings and on-device chips move routine work off the cloud.
- The same revenue therefore needs less cloud, which caps what the installed base can earn.

- **Precision shifts.** FP4 microscaling delivers several times the throughput per watt of FP8/FP16 generations, and ternary-weight architectures remove floating-point multiply from the critical path. In power-constrained facilities this strands the prior generation regardless of its silicon health.
- **HBM bullwhip.** Lower-precision inference cuts memory-bandwidth demand per token. Capacity additions by SK Hynix, Samsung and Micron sized to 2025 demand risk oversupply by 2027–28.
- **Open weights as a deflationary wedge.** Llama, Mistral, DeepSeek and Nvidia's own open models commoditize the model layer. When a 70B-class model runs on a workstation, API pricing converges toward the electricity floor, removing the platform margin the hurdle needs. The low-cost invasion is already under way: Chinese open-weight models trained at a fraction of frontier cost are run on-premise by Western enterprises for routine work even where cloud access to Chinese providers is restricted or prohibited, because the weights, once published, are not a service that can be blocked.

  Distilled and quantized derivatives of those models are what the last-mile operators of Section 11 deploy. *Microscaling* — a block floating-point scheme in which groups of values share one exponent, standardized by the Open Compute Project in 2023 — is what makes FP4 usable for inference and is expected to be adopted fastest where hardware is scarcest.
- **Edge and on-premise.** Two different things reduce cloud receipts: inference on the user's own device (phones and PCs with NPUs), and inference on a customer's own servers (on-premise clusters running open-weight models). The paper's cloud-capture share θ_s combines both; neither reaches a hyperscaler meter.
- **Quantum computing** is not modeled. Gate rates, error correction and the absence of scalable quantum memory keep it outside the 2026–2035 window for commercial inference or training; it is mentioned only to say so.

13 Geopolitical Divergence

The US, Europe, China and others are building separate AI stacks; each duplication adds capital without adding customers.

In brief

- The US, Europe, China and others are building separate AI stacks with different power costs and rules.
- Each duplication adds capital without adding customers.
- China's cheaper power and state siting make it a low-cost competitor for the same work.

- **United States:** carries most of the global hyperscale debt and capex; industrial power $0.10–0.14/kWh in PJM and rising; 5–7 year interconnection queues [89, 90]. No federal carbon price; California's cap-and-trade and the northeastern RGGI scheme cover a minority of load.
- **Europe (FLAPD):** power $0.145–0.195/kWh, ETS carbon at ∼EUR 70/t, Dublin frozen to 2028 [91], Amsterdam capped [92].
- **China:** interconnection is a planning decision rather than a queue, and siting objection is not a constraint; curtailed western renewables at $0.02–0.035/kWh [v] under *East Data, West Computing*; state-subsidized training for industrial and humanoid robotics; open-weight export. Embodied AI is bandwidth-heavy: a four-camera robot at 30 fps and ∼60 spatial tokens per frame produces $\sim 2.7 \times 10^7$ tokens per camera-hour, which favors cheap power over cheap chips.
- **Middle powers:** India (DPI), the Gulf, Korea — sovereign models on stranded power and open weights, bypassing US hyperscalers for domestic demand.
- **Atoms.** Transformers on 36–48 month lead times, electronic-grade polysilicon, copper and neon set the deployment velocity; integrated supply chains with cheap state power hold a structural advantage over permitting-bound Western sites.

14 Economic Depreciation, Utilization, and the Commodity Floor

A commodities reviewer's three points: chips lose value faster than the books say, utilization gains go to buyers, and prices fall toward cash cost.

In brief

- An AI chip is worth what it can earn against the newest chip, so the silicon bought through 2026 is already worth $100–250B less than the books show.
- Running chips harder serves more work, but if prices fall in step it brings in no more money.
- If prices fall to the cash cost of running the chips — about a tenth of today's — the capital is never recovered.
- The cheapest producers set the price; the GPU renters are squeezed first.

Three points raised by a reviewer with a commodities background [45] change how the supply side should be read, and each is now in the model as a secondary variable.

14.1 Economic versus accounting depreciation

An AI chip is worth what it can earn against the newest one, so the silicon bought through 2026 is already worth $100–250B less than the books show.

The carry in Section 4 depreciates silicon straight-line over an effective 4.2 years — 20–30%/yr, close to the operators' accounting. The economic view is different: an installed accelerator is worth what it can earn against the newest chip, and the marginal cost of inference per token on the newest chip falls 50–90% with each generation.

On that view the value of a cohort follows a declining balance, $\text{NBV}_t = G(1-\delta)^{\text{age}}$, with $\delta \sim$Triang(0.5, 0.7, 0.9) per year [15, 45], and most of a cohort's value is gone within two years whether or not the silicon still runs — the direction Amazon's own 2025 shortening of server lives points [75].

The carry moves earlier. Two consequences.

- First, the carry is front-loaded: at $\delta = 0.7$ the 2027 carry is ~$415B rather than $390B and the 2030 carry ~$650B rather than $725B, because value written off early is not written off later (Figure 11, left). The annual deficits from 2027 are similar in size but flatter; what changes is timing, and the timing runs against the operators, since the losses fall in the years the paper already calls a sunk deficit.
- Second, and more immediately, the silicon bought in 2023–26 is already impaired on the economic schedule: its straight-line net book value at end-2026 is ~$330B, its economic value $75–230B, an unrecognized gap of $100B ($\delta = 0.5$), $175B ($\delta = 0.7$) or $250B ($\delta = 0.9$).

That gap is what ASC 360-10's fair-value step would recognize if the recoverability test failed; it is the mechanism, not the useful-life note, by which the impairment wave of Section 20 would arrive. The economic depreciation rate, δ, is a secondary variable, and the evidence on it currently points both ways: the cost-per-token series that Epoch AI maintains falls at the rates assumed, while Silicon Data's rental index has H100 and A100 rental prices *rising* through 2026 ($2.63 and $1.59 per GPU-hour in September), with residual values inferred from them rising too [68, 72].

Rising rentals are what scarcity looks like before the 2027–28 cohorts energize; a decline toward $1 per H100-hour would be the floor arriving. The variable stays swept until that series moves.

14.2 Utilization

Running chips harder serves more work, but if prices fall in step, it brings in no more money.

Inference throughput is modeled by operators at 40–50% utilization of nominal capacity, the rest held as latency and peak buffer [45]. Batching, quantization and the proliferation of open-weight models could double useful utilization for the heaviest workloads (register entry `inference_utilization`, Triang(0.40, 0.45, 0.50) today; doubling case as a sweep).

The same stock then serves twice the tokens. But receipts in this paper are dollars, not tokens, and doubling tokens raises dollars only if the price per token holds — which is precisely what the next subsection says it will not. Higher utilization is a Jevons effect: more inference, cheaper, from the same capital, with no relief for the carry.

14.3 Batch share, and what four decades of computing already taught

Computing has been here before: when work moves to batch, the buyer, not the owner, takes the gain.

Utilization does not rise on its own; it rises when work is moved into batch. The labs now sell asynchronous batch processing at 50–75% below interactive rates with 24-hour windows, and prompt caching at ∼90% off repeated context [50]; the register carries a *batch share* b ∼Triang(0.3, 0.5, 0.7) of 2030 tokens processed this way (a secondary variable).

At the mode, effective fleet utilization rises from 45% to ∼64% and the volume-weighted effective price falls to ∼70% of list; for heavy pipelines that stack batch and caching the effective price is 5–10 times below list, i.e. within one to three times the marginal cash cost.

Utilization: an old lesson. This is not new. Mainframe operators learned in the 1970s that a machine paid for by the shift is only economic if the night is filled with batch, and ran them at 90%-

plus; the grid- and distributed-computing decades made the same trade at the price of latency; and Bitcoin mining is the closest precedent of all — a commodity computation on special-purpose silicon, where within two years of each ASIC generation the hashprice converged to the marginal cost of the cheapest power, the equipment was obsolete in 12–24 months, and capacity migrated to wherever electricity was cheapest.

Gains go to the buyer. Inference has every one of those properties. The lesson of the precedents is that utilization gains are always taken by the buyer, not the producer: they lower the floor rather than lift the receipts. One caution on the numbers: Oracle reports GPU *allocation* utilization of 97.9% [46] — the share of its fleet rented out — which is a different quantity from the 40–50% *throughput* utilization within a rented job that the batch argument concerns; both can be true at once.

14.4 Who is the low-cost producer

The cheapest producers — own-chip clouds and open models — set the price; the GPU renters are the first squeezed.

In a commodity the survivors at the floor are the producers with the lowest full cost — the BYDs, not the incumbents — and the paper's carry should be allocated to them by tier rather than spread across the industry. Figure 10 builds a cost curve for five producer types from the same chain as the marginal cash cost (power, PUE, tariff [89], opex, tokens per hour) plus each tier's capital cost per token (capex per accelerator slot [9], life [75, 78], cost of capital [84], utilization [46]).

The producer cost curve. At the modes: on-premise open-weight small models for routine work cost $0.03 per million tokens all-in; in-house-silicon hyperscalers (TPU, Trainium, MTIA) $0.14; Chinese western-corridor capacity on domestic silicon $0.27 (cheap power offset by less efficient chips); Nvidia-based US hyperscalers $0.29; debt-funded neo-clouds $0.40. Against a blended list price near $0.30 the two Nvidia-based tiers are at or above break-even on full cost; against the effective prices heavy users already pay ($0.03–0.06), only the on-premise and in-house-silicon tiers cover their carry.

Neo-clouds go first. That ordering is the exposure table of Section 20 derived rather than asserted: the neo-cloud is the marginal producer the floor eliminates first; the Nvidia-based hyperscaler is next unless it moves to its own silicon; Google's TPU fleet is the industry's lowest-cost large producer; and the Chinese corridor competes on power while its chip efficiency lags.

The "BYD of AI" is not one company but a tier — in-house silicon on cheap power running open-weight models — and the carry the paper computes falls, in the end, on whoever is not in it.

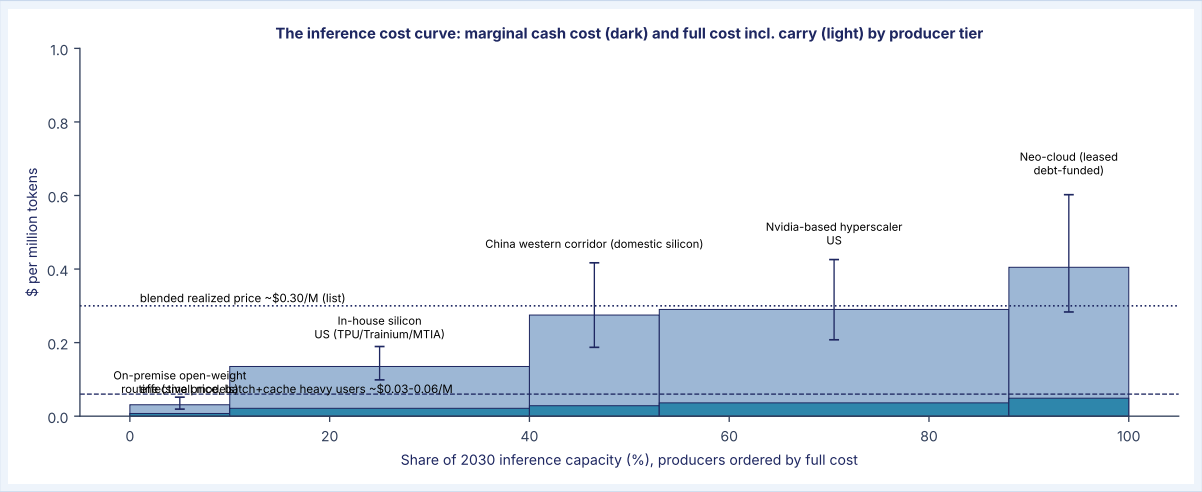


Figure 10: The inference cost curve. Producers ordered by full cost per million tokens (bar width is share of 2030 capacity); dark is marginal cash cost, light adds the carry (depreciation and return). Dotted: blended list price; dashed: effective price paid by batch-and-cache heavy users. At effective prices only the two lowest tiers cover their carry.

14.5 The commodity floor

If prices fall to the cash cost of running the chips — a tenth of today's — the capital is never recovered.

In a commodity, price converges to marginal cash cost and the return on fixed capital goes to whoever built cheapest; uneconomic capital is written off or replaced by lighter structures [45]. Inference has the shape of a commodity: an undifferentiated unit (the token), many producers, falling costs, open-weight models removing the product moat.

The marginal cash cost of a token is the cash it takes to produce one more — power and facility opex, not depreciation or return.

The marginal cash cost of inference. A chain: an accelerator drawing Triang(0.7, 0.9, 1.2) kW at PUE Triang(1.12, 1.22, 1.35) and a tariff of Triang($0.075, 0.10, 0.13)/kWh, plus non-power opex of Triang($0.05, 0.10, 0.18) per accelerator-hour, costs Triang-derived ∼$0.20–0.35 per hour in cash; at Triang(3, 6, 10) million tokens per hour at 45% utilization [50, 89] it produces tokens at a marginal cash cost of $0.036 per million (P10–P90 $0.026–0.053), or half that if utilization doubles (Figure 11, right).

Realized prices against the floor. Realized *list* prices are $0.10–0.30 per million for small and mid models and $1–5 for frontier models — roughly ten times the floor, blended — but effective prices for batch-and-cache pipelines are $0.03–0.06, within one to three times the floor (register entry `token_price_index`, effective tier).

If prices converge to the floor while volume rises to meet it, receipts converge on the fleet's cash cost — the opex line, ∼$130B in 2028 — against a carry of $540B then and $725B in 2030. On the commodity view the depreciation and return terms are never recovered by anyone but the lowest-cost producer, and the paper's deficit is not a shortfall to be grown out of but the ordinary fate of fixed capital in a commodity whose price found its floor.

The metric to watch. It is not revenue but the ratio of realized price per million tokens to marginal cash cost: the paper's register now carries both (`token_price_index`, `marginal_cash_cost`), and a ratio approaching one from above is the signal that the commodity view has won.

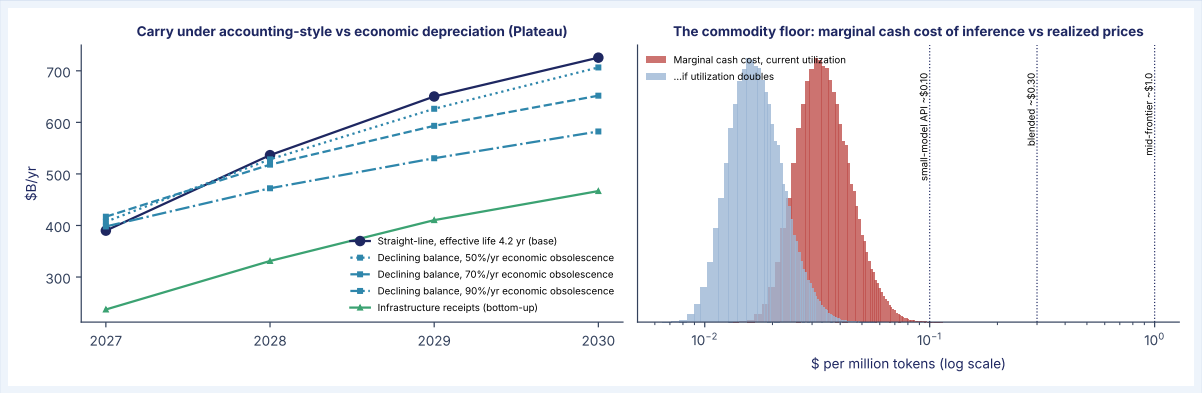


Figure 11: Left: the plateau carry under straight-line depreciation (base) and under declining-balance economic obsolescence at 50, 70 and 90%/yr, against bottom-up receipts; economic depreciation front-loads the carry. Right: the marginal cash cost of inference per million tokens at current and doubled utilization, against realized price points; prices are about ten times the floor.

14.6 Market context

Short sellers already bet against the pure GPU renters.

The commodities reviewer also notes that the pure-play GPU renters — the neo-clouds of the exposure table — are among the most heavily shorted positions in public markets in 2026, and that the uneconomic nature of the projects is argued publicly by short sellers including Jim Chanos [45].

This is corroboration of the paper's neo-cloud row, not evidence for it: a crowded short is a market opinion, and market opinions are inputs to nothing in the register. It is recorded because it locates the paper's argument in a live debate and because the short interest itself is one more observable to watch.

15 The Bull Case at Its Strongest: a16z's *State of Markets*, September 2026

The best bull case agrees with the paper on nearly every fact; it differs on two judgments.

In brief

- a16z's deck is the strongest case for the build-out, so the paper answers it point by point.
- The two agree on nearly every fact: capex, backlogs, rising GPU rents, returns on existing businesses.
- They disagree on two judgments: whether AI is paid from labor budgets as well as IT budgets, and whether scarce compute is permanent or a cycle top.
- The paper's arms-race path is the street's central case, not a stress test.

Andreessen Horowitz's September 2026 *State of Markets* deck [68] is the most complete statement of the case for the build-out, assembled by an investor with every reason to make it well. It is also the best test of this paper, because most of its charts bear directly on a register entry. Each of its claims is taken in turn: the evidence it offers, and what the register does with it.

1. **"We keep underestimating the capex."** Street consensus for Big-5 capex has been revised upward every year; the September 2026 consensus is about $1.05–1.1T for 2027 and $1.15T for 2028, and on the October calls every company that gave a direction pointed 2027 up [126], and J.P. Morgan's figures are $791B, $1,066B and $1,179B for 2026–28 [68, 71].

   What the register does with it: the paper's "arms race" path ($1.0–1.1T) is not a stress case — it is the street's central expectation — and the "plateau" is below consensus. Readers who take consensus at face value should read the arms-race rows of every table: a 2030 deficit of ∼$545B and no year of profit through 2035. The paper labels the path accordingly.

2. **"Capex is eating cash flow, for now."** Hyperscaler free cash flow is near zero in 2026–27; the consensus has it rebounding past $500B by 2030 [68, 71]. *Register:* a rebound of that size on a capex path that keeps rising to $1.18T requires revenue above $1T by 2029–30 — precisely the top-down break-even test.

   The two consensus series (capex up, free cash flow up) are consistent with each other only on the paper's bull case; one of them will be revised.

3. **"Reports of GPU obsolescence are exaggerated."** Silicon Data's September 2026 rental index puts the H100 at $2.63 per GPU-hour, the A100 at $1.59, the H200 at $3.29 and the B200 at $5.69, with residual values inferred from rentals rising through 2026 [68, 72]. *Register:* this is the strongest evidence on the other side of the economic-depreciation variable δ (Section 14), and it is why δ is a secondary variable rather than a range.

   Two readings coexist. Rental prices rising while token prices fall means compute is scarce today; the paper's claim is about what happens when the 2027–28 cohorts energize. And

$2.63 per hour against a marginal cash cost of $0.20–0.35 per hour is an 8–13× margin for the GPU owner — the same ratio of price to floor the commodity-floor section finds at the token level, from the other end. The variable to watch is the H100 rental price through 2027; a decline toward $1 is the floor arriving.

4. **"Backlogs have doubled year on year."** Microsoft RPO, Google Cloud backlog and Amazon RPO together approach $1.7T, up ∼150% year on year [68]. *Register:* added as an observable. A backlog is a contract, not a payment: Oracle's $664B converts over years and is over half one counterparty (Section 3); Google's $514B is not split between AI and the rest.

   Backlog growth is evidence of demand for capacity, which the paper does not dispute; the carry test is about the price that capacity ultimately earns.

5. **"Hyperscaler ROIC is above the cost of borrowing."** Bank of America puts hyperscaler return on invested capital near 20% against a cost of debt of 4–5% [68]. *Register:* that ROIC is earned on the existing businesses — search, advertising, the installed cloud — not on the AI cohorts, whose return is what this paper computes.

   Borrowing at 4.5% to fund assets whose incremental return is in question is the ordinary structure of a capital cycle, and the deck's own page on the railroads and telecoms (capex at 1.5–2% of GDP at each cycle's peak) makes the comparison.

6. **"Data centers may be lowering your electricity bill."** Watten, Bistline and Blanford find that each 10% increase in state data-center capacity lowered average residential rates by about 0.4% over 2019–24, by spreading the grid's fixed costs [74]. *Register:* taken as stated, and it is an important correction to the ratepayer narrative.

   It does not change the siting variable, which is calibrated on what communities *do* (Data Center Watch's blocked and delayed projects), not on what rates *did*; and the study predates the 2025–26 load growth and the Northern Virginia and Texas tariff increases. Both facts stand: rates fell on average through 2024, and opposition has risen since.

7. **"Enterprise AI spending has plenty of room to run."** Only 20% of organizations cite cost as a constraint; cloud reached ∼4% of IT budgets in its second year and AI is below that; and the deck argues the addressable market is "considerably larger than IT budgets" [68].

   Register: the last clause is the real disagreement, stated clearly. The paper's feasibility band is an IT-budget band. The deck's position is that AI is paid from labor budgets — the $30T global payroll — not from the $3.3T software-and-services pool.

   Whether labor budgets actually convert to AI spend is Section 10's question, and the paper's answer (about a quarter of nominal savings reach cash, over a J-curve) is why it keeps the IT-budget band. If the deck is right, the band is wrong by a factor of several and the plateau pays easily; if the slack trap is right, the band holds. This is the single most consequential disagreement between the two documents and the register cannot settle it from 2026 data.

8. **"Adoption is wide but shallow; power users are pulling away."** The top 1% of users consume orders of magnitude more AI than the field, and the gap is widening [68]. *Register:* the

same observation as MIT NANDA's 95% and the Census Bureau's tenth of firms (Section 10); the deck reads it as upside, the paper as the early J-curve. Both are consistent with the data; they differ on timing, which is the residual adoption factor.

9. **"Tokens up 600× in two years; frontier labs capture 70% of spend on 35% of tokens."** On OpenRouter, Anthropic, Google and OpenAI take ∼69% of spending on ∼35% of tokens; all other labs 65% of tokens for 31% of spending; open models on China-based hyperscaler endpoints are under 0.3% of model spend [68, 73].

   Register: this is the cloud-capture share and the commodity floor measured from the demand side: two-thirds of tokens already trade at the cheap end, a frontier premium persists for frontier problems, and the premium tier is three labs. It raises confidence in θ_{lab} and in the cost-curve ordering, and it is the deck's best evidence for a durable frontier margin.

10. **"Jevons: compute prices rise as token prices fall."** The deck's reading of rising H100 rentals alongside falling token prices is that efficiency gains are absorbed by demand [68]. *Register:* the paper agrees that this is what Jevons looks like while supply is short; the Bitcoin precedent (Section 14) is what it looks like after supply catches up. Which regime 2028 is in is the question the arms-race capex path answers one way and the adaptive path the other.

11. **"SaaS: prove-it, not pocalypse."** Software revenue growth has slowed but stabilized; operating leverage is stable or improving; the sell-off has been selective (cyber and vertical over horizontal) [68]. *Register:* the seat-software growth variable g_{seat} is a secondary variable for exactly this reason — the fundamentals have not yet confirmed the repricing — and Microsoft's +6–7% seat growth is already in the incumbent case. The deck's own newspaper chart, in which stocks sold off five years before earnings collapsed, is the caution it offers against its own point.

12. **"Capex is at or near the peaks of cycles past."** Lease-adjusted hyperscaler capex at ∼1.5% of US GDP, against ∼2% for the railroads and ∼1.5% for telecoms at their peaks [68]. *Register:* the paper's own scale statement (2.5% of GDP on a gross basis) is brought into line as 1.5–2.5% depending on definition; the comparison to the two prior cycles that ended in impairment is the deck's, and the paper adopts it.

Where a16z and the paper differ. Taken together the deck and the paper agree on nearly every observable and disagree on two judgments: whether AI will be paid from labor budgets as well as IT budgets, and whether rising compute prices are the permanent state of a supply-constrained industry or the top of a cycle. The register names both as the places to look.

16 The Sell-Side Hurdle: Goldman Sachs's Phase-2 ROIC Framework, September 2026

Goldman Sachs's hurdle — 27 cents of revenue per dollar of capital — matches the paper's 28.

In brief

- Goldman Sachs asks what revenue one cohort of spending must earn: $1.42T over 2028–30.
- Per dollar of capital that is 27 cents a year; this paper's carry is 28. The hurdle is not in dispute.
- The two differ on scope — one cohort or the whole stack — and on running costs, which Goldman puts lower.

On September 24, 2026, Goldman Sachs's Americas Technology team (Sheridan, Borges, Schneider and colleagues) published a 29-page note, *Sizing the AI Economy Needed to Justify ROIC on Hyperscaler AI Capex* [69], whose question is this paper's question asked from the other side of the table: not "what is the carry" but "what revenue would make the carry worth paying." The note is taken here the way Section 15 took a16z's deck — claim by claim, against the register.

It is the closest thing to a sell-side replication of the supply-side model that exists, and the two agree on the hurdle to within a few percent; where they differ is scope, one input, and what is assumed about demand.

16.1 What the note computes

Goldman sizes the revenue one cohort of spending must earn: $1.42T over 2028–30.

The framework isolates one cohort: "Phase 2," the AI-compute capex of six US hyperscalers (Alphabet, Microsoft, Amazon, Meta, Oracle and SpaceX) over calendar 2026–27, which the note puts at $1.726T, taking 85–90% of each company's total capex as AI-related (AWS segment capex for Amazon, the AI segment for SpaceX). That cohort is split 70% "compute" (servers, chips, networking) depreciated straight-line over 5 years and 30% "shells" (land, buildings, infrastructure) over 15 years.

Goldman's cost per gigawatt. An all-in cost of $42.4B per gigawatt (Epoch AI's year-end 2025 inputs inflated 10%; servers $24.1B, network $12.6B, facilities $5.4B) implies ∼41 GW added. Operating cost excluding depreciation is $836M per GW-year (also from Epoch, plus 10%), scaled by an operational ramp of 60%, 80% and 85% in 2028, 2029 and 2030. The return threshold is a 15% return on invested capital, defined as net operating profit after tax (NOPAT — operating profit less a 21% tax) in each of 2028–30 divided by the *average annual* capex of the phase ($863B).

The revenue a cohort must earn. Grossing NOPAT up for tax and adding depreciation and operating cost gives the revenue the cohort must earn: $465B, $474B and $476B in 2028, 2029 and 2030 — **$1.42T cumulative, or $11.6B per GW-year** — at an operating margin of ∼35%.

A sensitivity table runs the ROIC threshold from 0% to 30% and the cost per GW from $34B to $51B: the three-year revenue requirement spans $908B to $1.89T, i.e. $6.2–18.6B per GW-year.

Contracts, not forecasts. The note then benchmarks the requirement against contracted backlog rather than against a demand forecast. For the three public cloud providers alone (Amazon, Microsoft, Alphabet; Phase-2 capex $1.22T, ∼29 GW) the same framework requires $1.00T of 2028–30 revenue, which is 59% of their combined $1.69T backlog at Q2 2026 (up 152% year on year): 78% of Alphabet's $496B, 68% of Amazon's $514B and 40% of Microsoft's $678B.

Goldman's conclusion. The note's conclusion is that near-term return compression is "a natural consequence of the massive upfront investment cycle rather than evidence of structurally poor AI economics," and that the 15% threshold is conservative against what the companies themselves describe: Amazon's ∼3-year breakeven on servers with a 5–6 year life, Oracle's "high-20s" steady-state ROIC on large projects, and SpaceX's stated one-year payback on terrestrial AI capacity.

A second build, from the chipmakers. A separate build in the same note — Nvidia, Broadcom, AMD, Marvell and MediaTek revenue per GW — implies total AI infrastructure capex of $861B, $1.34T and $2.0T in 2026, 2027 and 2028 (20, 35 and 57 GW), a wider set than the hyperscalers because it includes labs, sovereigns and enterprises.

16.2 The same hurdle in the paper's units

Restated per dollar, the bank's hurdle and the paper's carry are almost the same.

The note's requirement can be restated per dollar of cohort capital and set beside the carry of Section 4, which is also a cost per dollar of in-service gross. Table 11 does this for the note's 2029 column and for the paper's 2028 plateau at the modes (Appendix F, worked example: gross $1.9T, carry $540B).

What follows from Goldman's note. Three things follow.

- **The hurdle is not in dispute.** A sell-side desk with every incentive to set it low and this paper with its ranges decomposed arrive at 27–28 cents of annual revenue per dollar of capital; the note's own sensitivity ($6.2–18.6B per GW-year) brackets the paper's modes. Readers who distrust the paper's supply side can substitute Goldman's and change nothing in the result.
- **One cohort or the whole stack.** The note's $1.42T is the requirement of *one* cohort and

Table 11: The Goldman Sachs Phase-2 requirement and the paper's carry, per dollar of capital per year

Component	GS, 2029 ($/$ capex)	Paper, 2028 ($/$ gross)	Why they differ
Depreciation	0.160	0.153	GS: 70% compute at 5 yr + 30% shell at 15 yr. Paper: 55% silicon at 4.2 yr (harmonic across fleets) + 45% shell at 20 yr. The shorter life and the smaller silicon share offset.
Operating cost (excl. depreciation)	0.020	0.067	GS: Epoch's $836M/GW-yr, essentially power and maintenance, at 60–85% ramp. Paper: power 1.9% + staffing/maintenance 2.0% + property tax and insurance 1.0% + network 1.0% + other 0.6% (Section 7). The one material gap; see below.
Return	0.095	0.064	GS: 15% NOPAT on average annual capex (half the cohort), grossed up to pre-tax EBIT. Paper: CAPM cost of capital (9.45%) on undepreciated net book (∼68% of gross). GS's return is a target; the paper's is the floor below which capital is destroyed.
Required revenue	**0.274**	**0.284**	Within 4%. On the same $1.9T stock the GS framework would ask $520B/yr; the paper's carry is $540B.

ignores, by construction, both the 2023–25 cohorts still on the books and the capex of 2028 and beyond; its authors say so. The paper's carry stacks the cohorts (that is what a vintage model is for), which is why its 2028 figure applies to $1.9T of gross and its 2030 figure to ∼$2.5T. Applying the note's own per-dollar requirement to the stacked stock gives the paper's result.

- **The note's cohort is larger.** The cohort itself is larger in the note ($1.73T) than in the paper ($1.23T AI-attributable for 2026–27) for two scope reasons: the note counts 85–90% of all capex as AI, where the paper nets a non-AI baseline that filings pin at ∼$130B in 2023 growing 2–10%/yr (Section 7); and the note adds SpaceX. Both are defensible; the register records the note's convention as the upper bound on the AI-attributable share.

16.3 Where the paper is harsher, and where it is not

The two differ on scope — one cohort or the whole stack — and on one input, running costs.

In brief

- The one input that really differs from Goldman Sachs is running cost: 2% of capital a year against the paper's 6.65%.
- If Goldman is right, the 2030 gap falls from about $260B to about $140B; the sign and the 2027–28 loss stand.
- Backlog is a contract, not a payment, and management claims are graded as statements by interested parties.

Operating cost. The one input on which the two frameworks differ materially is non-depreciation operating cost: 2% of capital per year in the note (power and maintenance, from Epoch) against 6.65% in the paper, whose decomposition adds staffing, property tax and insurance, network and "other" at 4.6% of gross.

On the 2028 plateau stock that is ∼$85B/yr of carry; on the 2030 stock ∼$115B. If the note's figure is right and the paper's is a double count — property tax is often abated for data centers, and network is partly in the capex — the 2030 plateau deficit falls from ∼$260B to ∼$140B and its z-score from ∼3.5 to ∼2; the sign and the 2027–28 sunk deficit are unchanged.

Not changed silently. The register now carries both anchors on c_{opex} (Appendix G) and the input is flagged for a sourced operator cost per MW-year; by the update protocol's rule (Appendix H) adopting the lower anchor would be a material re-issue, so it is not done silently here.

Demand. The note does not forecast the revenue; it shows what revenue is needed and observes that backlog covers it. The paper's two demand estimates put total infrastructure receipts — from *all* cohorts — at ∼$345B in 2028 and ∼$480B in 2030 (Table 7), i.e. 2030 receipts from the whole stock roughly equal to what the note requires from the 2026–27 cohort alone.

A backlog is not a payment. The backlog benchmark is addressed in Section 15 (item 4) and Section 3: a backlog is a contract, not a payment; the three CSP backlogs include non-AI commitments; Microsoft's includes OpenAI's multi-year Azure commitment and Oracle's is over half OpenAI; and the note itself assumes no further backlog growth.

Converting 59% of today's backlog over 2028–30 requires the counterparties to pay, which is the revenue-quality question of Section 5, not a different answer to it.

Ramp and utilization. The note's 60/80/85% is the share of built capacity that is operational, a cohort ramp; the paper's energization lag and grid cap play the same role, and its inference utilization (40–50% of nominal, Section 14) is a different quantity — how hard operational capacity is run. The two are multiplicative, and the note's revenue per GW is stated at 100% utilization of operational capacity.

Gigawatts. The note's semiconductor build implies 57 GW of AI deployments in 2028 worldwide. The paper's grid energization cap is 22–40 GW/yr. One of the two is wrong, or 2028's silicon will be bought before it can be powered; the register records the note's figure as the high anchor on the cap and the 2028 deployment number as an observable to test in the Q4 2027 and 2028 utility filings.

Fungibility. The note reports the operators' framing: Microsoft's "fungible fleet," Amazon's modular retrofits, Alphabet shifting capacity between internal and external workloads. The paper does not dispute fungibility *within* AI workloads — training to inference, between geographies — which is exactly what those statements claim. The dual-use fallacy of Section 4 is about AI halls hosting non-AI cloud, which none of the statements claim.

What the register takes. Five observables (Table 4): the Phase-2 requirement of $1.42T and $11.6B/GW-yr at 15% ROIC; the $42.4B/GW cost and its $24.1/12.6/5.4B split; Epoch's $836M/GW-yr operating cost; the 59%-of-backlog conversion the three CSPs would need; and the 20/35/57 GW deployment path. One flagged input (c_{opex}, two anchors) and one high anchor (the grid cap).

Management claims, graded. The note's management claims — Amazon's 3-year server breakeven, Oracle's high-20s ROIC, SpaceX's one-year payback — are recorded as grade-J (judgment) statements by interested parties, to be tested when segment disclosures permit. The note and the paper disagree on nothing arithmetical; they disagree on whether the cohorts after this one, and the ones before it, belong in the sum. The paper's answer is that a balance sheet does not get to choose.

16.4 Four arguments from the first review round, not yet in the model

Four mechanisms from the first review that are not yet in the model, kept so they are not lost.

The first circulated draft was built in a long exchange whose working notes contained several mechanisms that did not survive into the paper's text, mostly because they lacked a source at the time. They are listed here so they are not lost, each with what it would change and what would put it into the register.

1. **Take-or-pay power.** The paper's facility opex scales with load. A growing share of hyperscale power is contracted under long-dated take-or-pay power purchase agreements — Microsoft's 20-year contract for the restarted Three Mile Island unit, Amazon's Susquehanna arrangement, Meta's 20-year Clinton contract [70][v] — under which the payment is owed whether or not the capacity runs.

   For the contracted share, power moves from opex into carry: a fixed liability that does not fall when utilization does. At 2% of gross for power, a 30–50% contracted share converts

$10–25B/yr of 2028 opex into a fixed charge. *Register:* add a contracted-power share when a sourced figure exists; the effect is on the *shape* of the downside (the carry no longer flexes down in a demand shortfall), not on the base case.

2. **The sovereign backstop.** If the 2030 plateau deficit is ∼$260B against a carry of ∼$725B, a state that wished to keep the stock running — for defense, sovereignty or employment reasons — would need to absorb roughly 35% of the carry. That is the scale of the implicit guarantee behind "AI is strategic," and it is not small: comparable to a year of US federal R&D. *Register:* a what-if, not a variable; it is the size of the public-money question if the private one is answered the way this paper expects.

3. **Agentic loops as the Jevons mechanism.** The 600× growth in tokens on OpenRouter (Section 15) is mostly agents calling models many times per task. Tokens per task rising 10–100× as work moves from chat to agents is the mechanism by which Jevons could keep hyperscaler receipts growing after the per-token price collapses to the floor. *Register:* already inside the residual adoption/capability factor; the observable is tokens per paid seat, which no operator yet discloses.

4. **Outcome-based procurement.** a16z's labor-budget argument (Section 15, item 7) has arithmetic: 2% of the $30T global knowledge payroll is $600B/yr, three times the paper's 2030 IT-budget feasibility band. The paper's slack and leakage sections say why that 2% is hard to extract and why, when it is, 10–50:1 of it stays with buyers and integrators. *Register:* the feasibility band's upper edge is where this argument lives; it is already the axis of Figure 22.

Two further notes from the same exchange — a three-bloc comparison of five-year cost per megawatt (roughly $42–50M in Europe, $32–38M in the US, $14–18M in China's western corridors) and a sketch of rest-of-world demand (India, ASEAN, Africa, Latin America) — were derived without sources and are recorded here only as questions for the register[v].

17 Results: Break-Even Growth

Revenue must grow about 49% a year to break even by 2030; no growth rate rescues 2027–28.

In brief

- Counted sector by sector, receipts fall about $260B a year short in 2030, three and a half standard deviations from break-even.
- AI can disrupt software and still fail to pay for its capital: the buyer's dollar moves, but only a fraction reaches the cloud.
- With a 35% spending cut, the chance of profit is about 50% in 2030 and 95% by 2032.

Each run draws $N = 100{,}000$ samples of the parameters in Sections 4–5 and computes the annual surplus or deficit $\Delta_t = D_t - H_t$ (positive is a surplus) for 2027–2030. Parameters are independent; since capex, energization and demand expectations are positively correlated in reality, the spread is understated and tail probabilities are indicative.

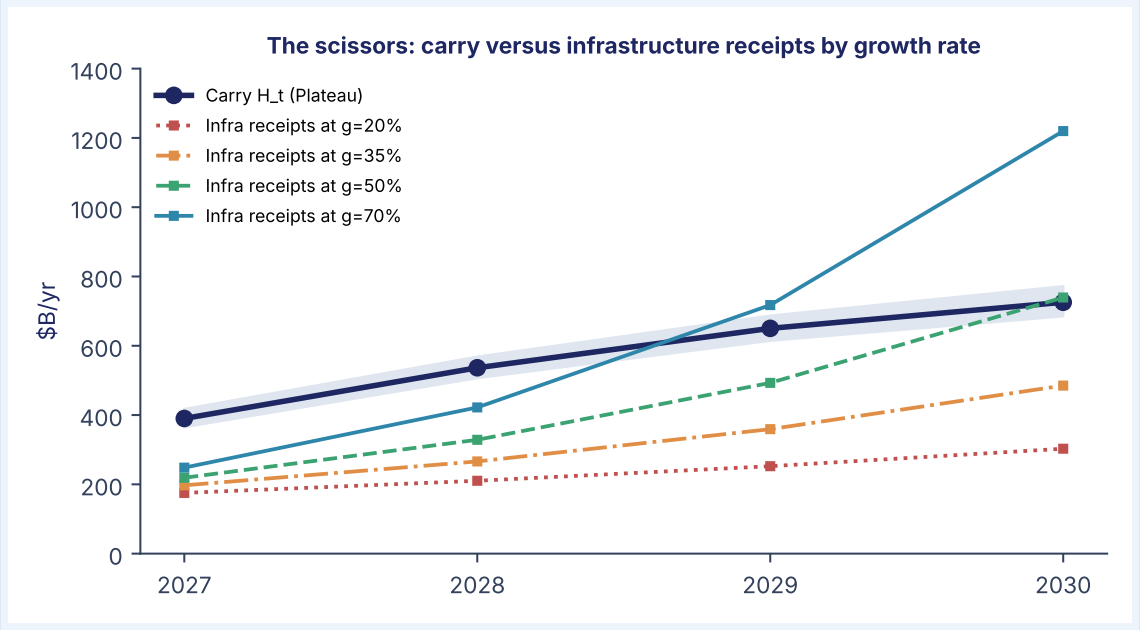


Figure 12: Carry (Plateau) against infrastructure receipts at four sustained growth rates. The crossing year is the break-even year for that g.

Table 12: Plateau path: median Δ_t ($B) and P($\Delta_t < 0$) by sustained growth g

g (%/yr)	2027	2028	2029	2030
20	−215 (100%)	−325 (100%)	−400 (100%)	−425 (100%)
30	−200 (100%)	−290 (100%)	−330 (100%)	−310 (100%)
40	−185 (100%)	−250 (100%)	−250 (100%)	−165 (100%)
50	−170 (100%)	−210 (100%)	−160 (100%)	+10 (41%)
60	−155 (100%)	−165 (100%)	−55 (92%)	+225 (0%)
80	−130 (100%)	−65 (98%)	+200 (0%)	+800 (0%)

17.1 Bottom-up result

Counted sector by sector, receipts fall about $260B a year short of the carry in 2030.

Table 15 and Figure 18 compare the carry with infrastructure receipts from the fifteen sectors, net of ∼$12B/yr of genuinely circular flows F_{circ} (Section 9); κ in the table is the sovereignty capital multiplier, 1 in the base case.

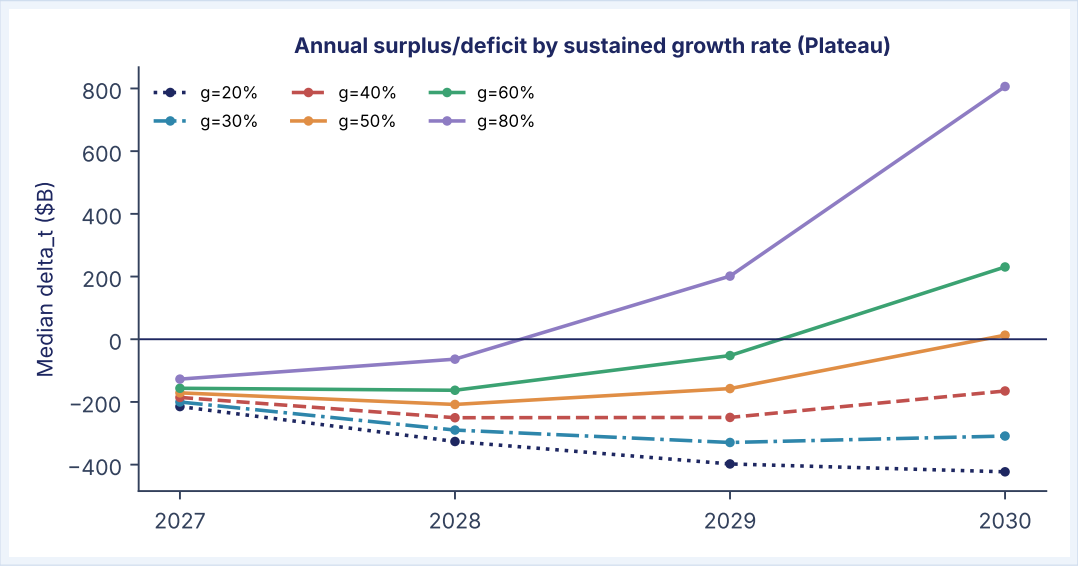


Figure 13: Median annual surplus or deficit Δ_t under Plateau for six growth rates. No rate clears 2027.

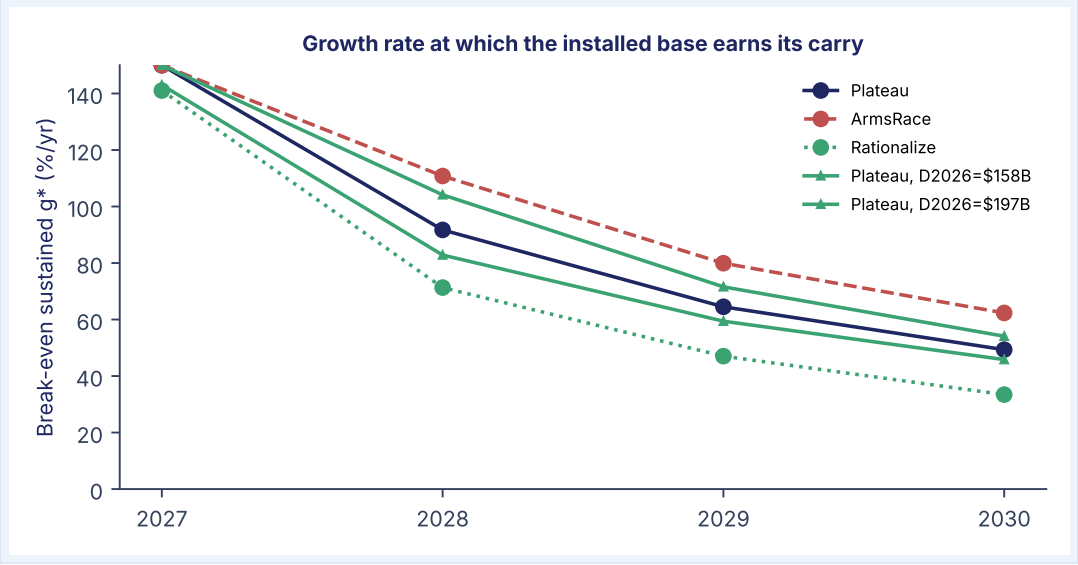


Figure 14: Break-even sustained growth g^* by year and capex path, with the 2026 revenue base at its low and high ends.

Table 13: Break-even sustained growth g^* (median $\Delta_t = 0$)

Path / variant	2027	2028	2029	2030
Plateau	>150%	92%	65%	49%
Arms race	>150%	111%	80%	62%
Rationalize	142%	71%	47%	33%
Plateau, $D_{2026} = \$163$B (low end)		101%	70%	53%
Plateau, $D_{2026} = \$194$B (high end)		84%	60%	46%
Plateau, accounting lives (4.5–6.5 yr)		87%	64%	51%
Plateau, 8-year silicon life		79%	60%	49%
Plateau, thermal life Triang(2.5, 3.5, 5)		93%	64%	49%
Plateau, sovereignty overlay ($\kappa = 1.2$, $\gamma = 0.25$)				∼66%

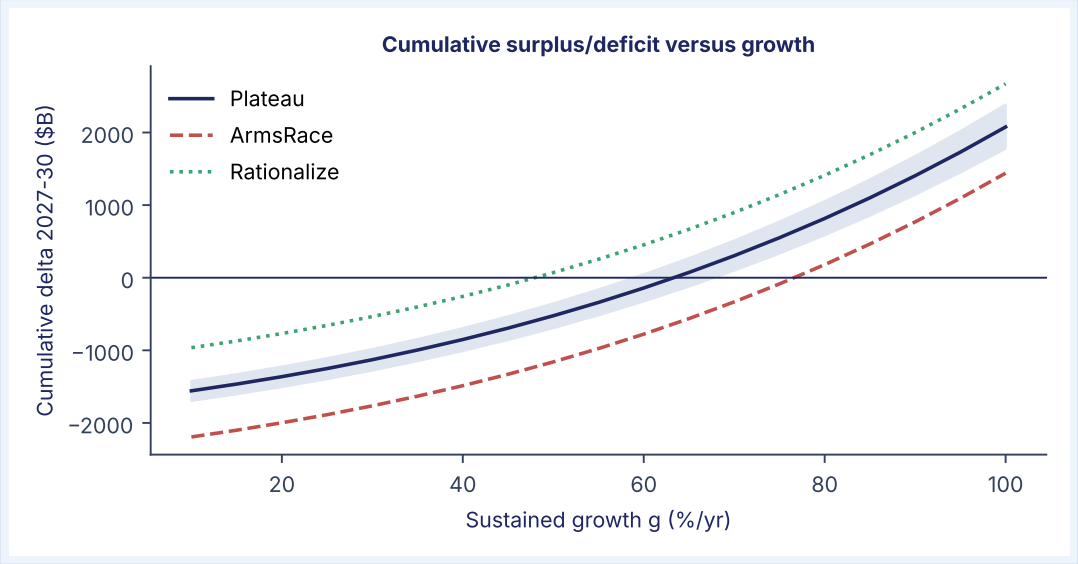


Figure 15: Median cumulative Δ over 2027–30 versus g (band is P10–P90 for Plateau).

Table 14: Cumulative Δ 2027–30 ($B, median; P10–P90; P(cumulative < 0))

Path	$g = 30\%$	$g = 50\%$	$g = 70\%$
Plateau	−1,135 (−1,275, −995; 100%)	−530 (−690, −370; 100%)	+295 (+105, +485; 2%)
Arms race	−1,770 (100%)	−1,165 (−1,355, −980; 100%)	−340 (−560, −130; 98%)
Rationalize	−540 (−660, −420; 100%)	+65 (−80, +205; 28%)	+890 (+715, +1,065; 0%)

Table 15: Bottom-up: median $\Delta_t = \text{Receipts}_t - F_{\text{circ}} - \kappa H_t$ ($B) and P($\Delta_t < 0$); cumulative 2027–30

Path	Sovereignty	2027	2028	2029	2030	Cum. (P<0)
Plateau	none	−155 (100%)	−205 (100%)	−240 (100%)	−260 (100%)	−855 (100%)
Plateau	κ=1.2, γ=0.25	−250	−340	−405	−450	−1,450 (100%)
Arms race	none	−190	−315	−440	−545	−1,490 (100%)
Arms race	κ=1.2, γ=0.25	−295	−475	−645	−795	−2,210 (100%)
Rationalize	none	−115 (100%)	−95 (98%)	−55 (80%)	+5 (48%)	−260 (89%)
Rationalize	κ=1.2, γ=0.25	−205	−210	−185	−135	−735 (100%)

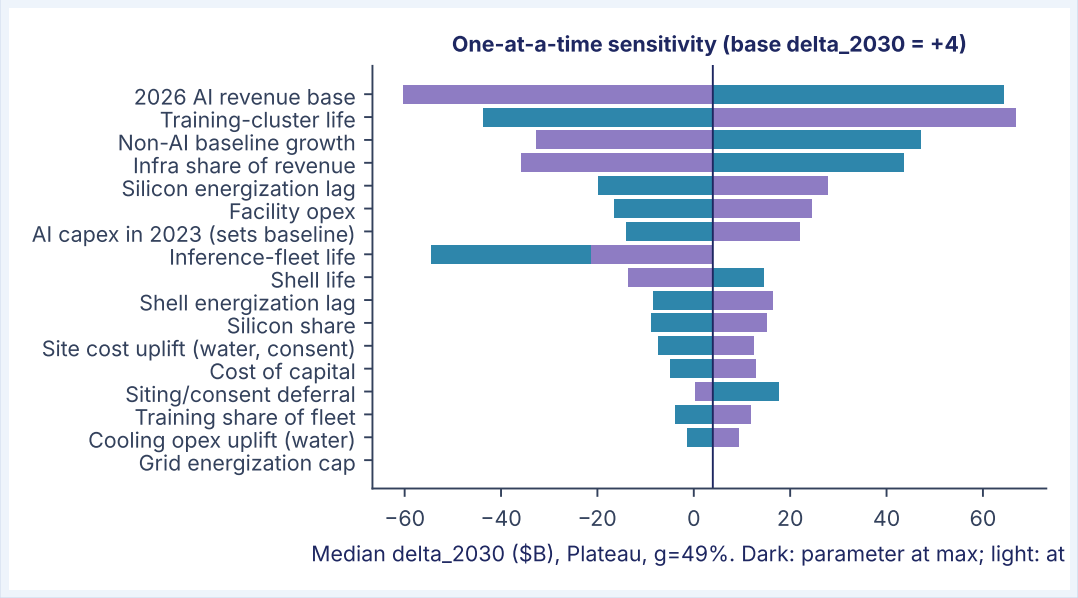


Figure 16: One-at-a-time sensitivity of Δ_{2030} (Plateau, $g = 49\%$) to each parameter at its minimum and maximum, others at mode.

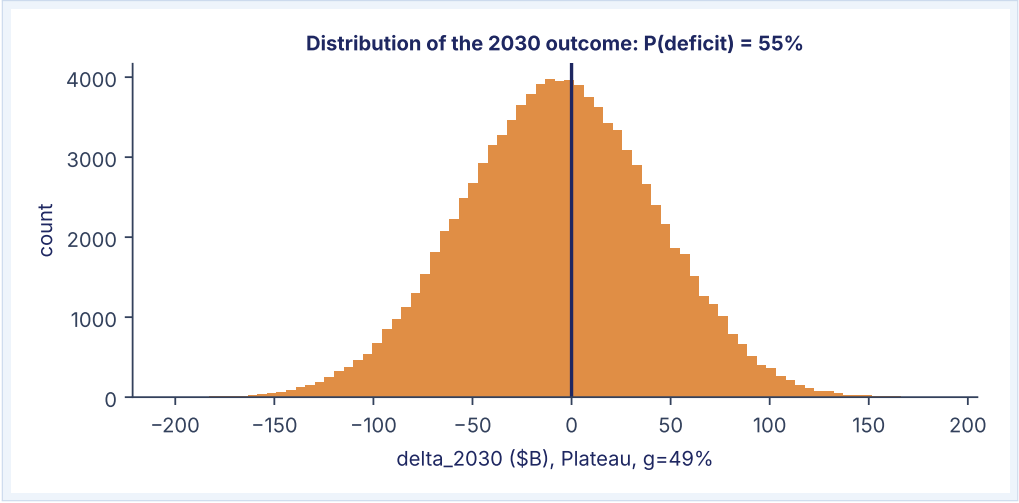


Figure 17: Distribution of Δ_{2030} under Plateau at $g = 49\%$, the neighborhood of break-even.

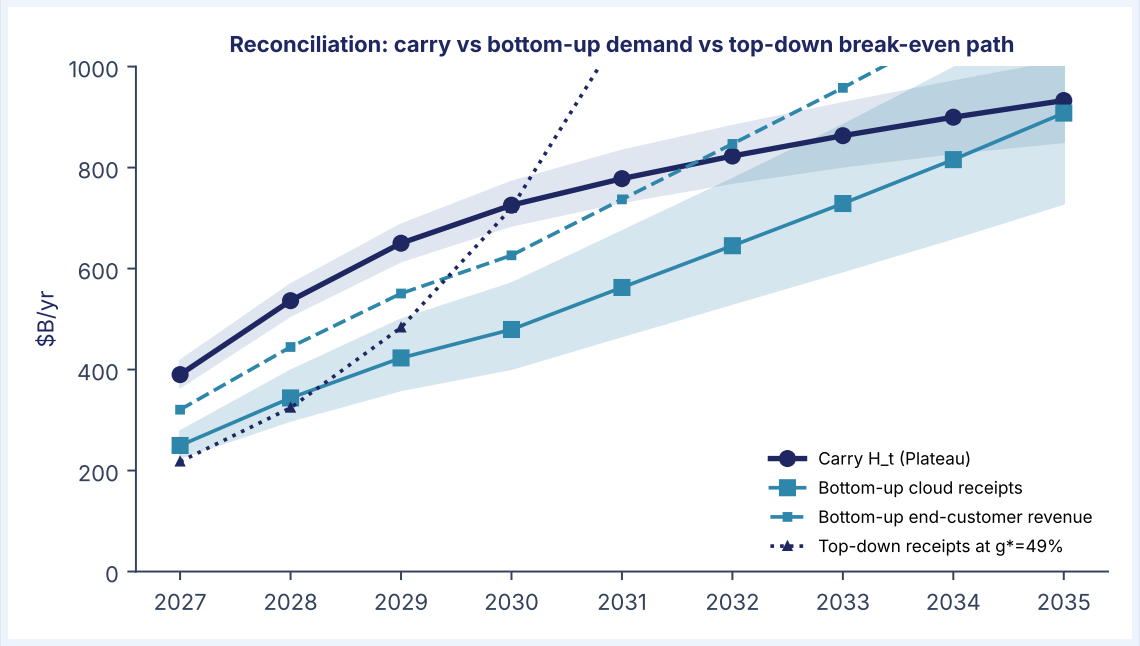


Figure 18: Reconciliation of the two demand estimates against the plateau carry. The top-down path at $g^* = 49\%$ is what the stock needs; the bottom-up receipts are what the sectors deliver.

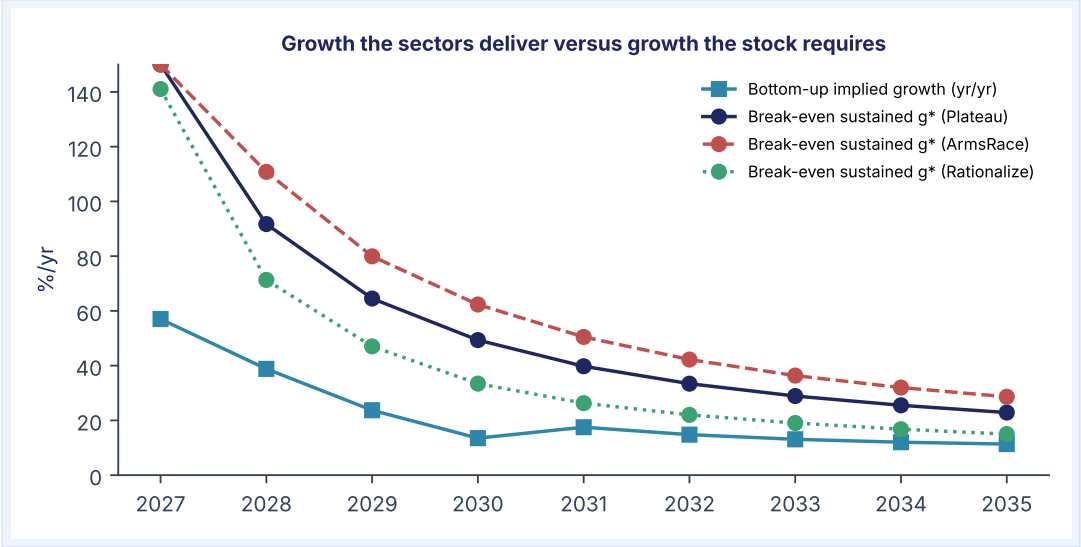


Figure 19: Growth delivered by the sectors (year on year) versus sustained growth required by each capex path. The curves cross in the wrong direction: the sectors decelerate as the requirement falls, and never meet it on a plateau.

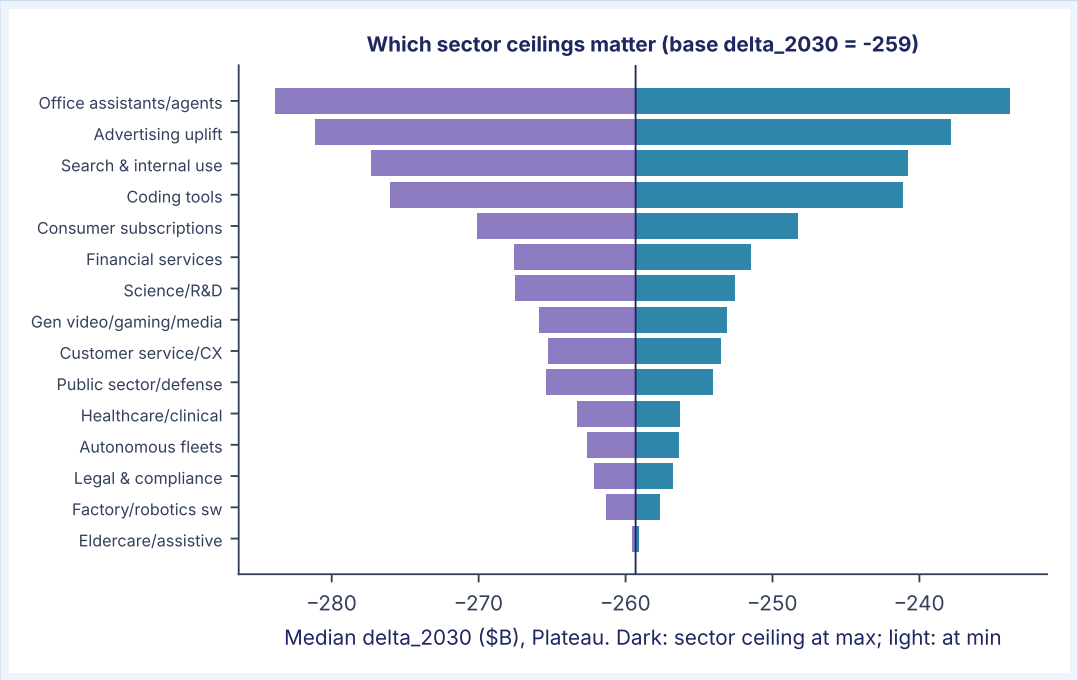


Figure 20: Sensitivity of the 2030 bottom-up deficit to each sector's ceiling at its minimum and maximum. No single sector ceiling closes the gap; advertising and assistants are the ones that could move it most.

17.2 Variance budget, undecomposed and decomposed

Breaking the inputs down cuts the uncertainty from 286 to 104, and the sign survives.

Equation 1 in practice: Table 16 apportions the one-at-a-time swings into shares of total variance (half-swing squared over the sum), with the inputs treated first as single judgment ranges and then as the decompositions of Section 7. Undecomposed, two inputs — the 2026 base and the cloud share — would carry 82% of the top-down uncertainty; decomposed, the root-sum-square is 104. What is left is the fleet-mix silicon life on the supply side and, on the demand side, the base and the cloud share, both already reduced to public components; their remaining spread is the labs' second-half 2026 bookings and Anthropic's undisclosed margin, which the next two quarters of filings will resolve.

The bottom-up variance. On the bottom-up side, decomposing the advertising ceiling takes its contribution from half the sector variance to a tenth, leaving assistants and the common factor. The root-sum-square is less than half the linear sum throughout — the quadrature discount — and the tight factors contribute almost nothing even though there are many of them.

17.3 Reconciling the two estimates

Table 16: Variance budget of Δ_{2030} (Plateau). Half-swing is half the min-to-max change in median Δ_{2030}; share is its squared contribution to the total

	Single judgment ranges		Decomposed (Section 7)	
Top-down input (Δ_{2030}, Plateau, $g = g^*$)	**Half-swing**	**Share**	**Half-swing**	**Share**
2026 revenue base (7 components, hyperscaler part decomposed)	229	64%	64	38%
Cloud share θ (by channel and by lab)	121	18%	52	25%
Facility opex (5 components, plus water uplift)	78	7%	20	4%
Silicon life (training/inference fleet mix)	66	5%	48	22%
Non-AI baseline (constrained by 2023)	42	2%	<10	<1%
Energization lag (silicon/shell)	41	2%	<10	<1%
Cost of capital (CAPM)	26	1%	29	8%
Shell life; silicon share (Nvidia-anchored)	13, 12	<1%	12, 17	~4%
Grid energization cap; siting deferral; site cost and cooling uplifts (new)	—	—	<12 each	~2%
Root-sum-square	286		104	
Linear sum	628		280	
Bottom-up sector ceiling				
Advertising uplift	54	51%	18	11%
Office assistants / agents	36	23%	36	45%
Consumer (now decomposed)	24	10%	12	6%
Search & internal; coding	18, 18	11%	18, 18	26%
Remaining ten sectors	<9 each	5%	<9 each	6%
Root-sum-square	76		50	

The two estimates disagree by about $255B of end-customer revenue in 2030; the gap in receipts against the carry is three and a half standard deviations.

The top-down sweep says the plateau stock needs 49%/yr sustained through 2030 (about $880B of end-customer revenue; the siting friction defers carry but adds cost, and the two nearly cancel by 2030). The bottom-up chains deliver 33% CAGR (about $625B), with year-on-year growth falling from 57% to 14% as the large sectors saturate.

The two methods share only the 2026 base; the ceilings, ramps and capture shares are independent judgments, and the gap between them — roughly $255B of end-customer revenue or $260B of infrastructure receipts in 2030 — is about five times the root-sum-square half-swing of the bottom-up estimate (Table 16); expressed as a z-score of the difference, $\Delta_{2030}/\sigma_\Delta = -259/73 \approx -3.5$ (Appendix D).

A robust sign. The Fermi standard is not certainty, but a gap larger than the propagated noise. Figure 20 shows that no single sector ceiling closes it; advertising uplift at its decomposed maximum ($170B) no longer can, even with assistants at theirs ($230B); Figure 8 maps the pair: no combination of the two ceilings within the plotted range closes the 2030 gap on its own, because ramps and capture shares bind as well. The concrete bull case is therefore not "bigger ceilings" but "faster ramps and higher cloud capture at once" — the residual factor of Figure 7.

17.4 Can both be true? Cannibalization and the "internally inconsistent" objection

Yes: AI can disrupt software and still fail to pay for its capital — the buyer's dollar moves, but only a fraction reaches the cloud.

Bank of America's note on the 2026 software repricing put the objection plainly: investors cannot believe both that AI capital expenditure fails to earn its return and that AI disrupts the whole software industry [37]. The paper's answer is that the two are one claim, and the mechanism is cannibalization. AI does not add a new spending pool to the enterprise budget; it enters an existing one. Three cases span the possibilities.

Additive or substitutive? If AI spend is *additive*, total software-plus-AI spending equals the old software pool plus the AI pool, and the incumbents keep theirs. If it is *substitutive*, every AI dollar replaces a software dollar and the total is unchanged. The evidence points between: clients do pay more for software with AI in it — Microsoft's July price increases are the proof — but they buy fewer seats, and the seats they drop were the incumbents' highest-margin revenue.

Partly additive. The total rises, but by less than the two pools added together: the feasibility band of Section 7 is built exactly this way, with a reallocation share (12–32% of the pool moving from seats and services to AI solutions) plus a small genuinely new component (2–7%).

So AI revenue can reach ∼$1T by 2030 while the software industry shrinks, because most of that trillion is the software industry's own money changing hands — from seat-priced incumbents to labs, integrators and on-device silicon — and only a minority of it reaches the infrastructure meter.

One flow, two consequences. Both halves of the objection are consequences of the same flow: the buyer's dollar moves, the incumbent loses it, the infrastructure owner sees a fraction. There is no inconsistency; there is a leak, and the leak is the paper.

17.5 The overlap gauge

The chance that receipts exceed the carry, mapped over the two things the paper cannot pin down.

In brief

- The right question is not the sign but the probability that receipts exceed the carry.
- On a flat path that needs 2030 AI revenue near $950B — inside the feasible band, but only if the sector chains are about 50% too low.
- With a 35% spending cut the chance of profit is about 50% in 2030 and 95% by 2032.
- The map shows the result as a probability, not a prediction of loss.

The question a Fermi analysis should end on is not "what is the sign" but "with what probability can the two distributions overlap, and inside what feasible region." Figure 21 overlays the bottom-up receipts and carry distributions year by year; Table 17 states P(receipts > carry) for every path and year; and Figure 22 maps that probability over the two residual axes with their feasibility cutoffs drawn in.

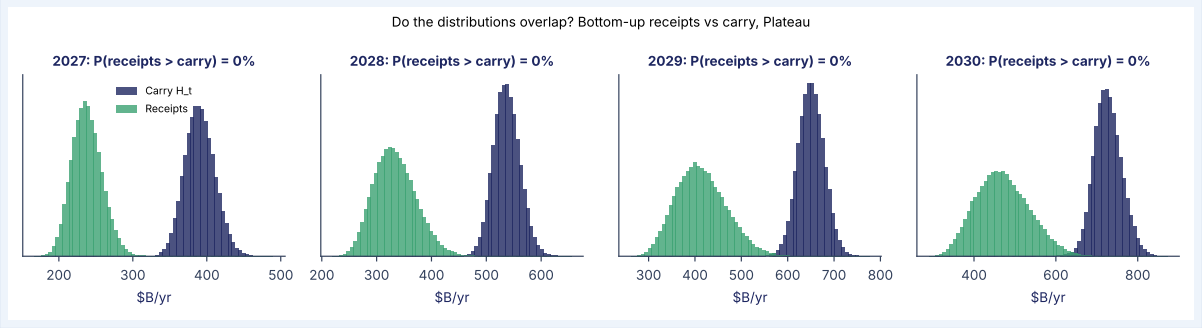


Figure 21: Overlap of the bottom-up receipts and carry distributions by year (Plateau). The distributions do not touch in any year.

Table 17: P(profit) = P(receipts − circular > carry), bottom-up demand, by path and year

Path	Sovereignty	2027	2028	2029	2030
Plateau	none / overlay	0% / 0%	0% / 0%	0% / 0%	0% / 0%
Arms race	none / overlay	0% / 0%	0% / 0%	0% / 0%	0% / 0%
Rationalize	none	0%	2%	20%	52%
Rationalize	overlay	0%	0%	0%	3%

The map in one picture. The feasibility band is what keeps it honest. A single line at 8% of total IT spend (∼$810B) would put the plateau's 50% contour outside the feasible region; decomposing the cutoff into Gartner's software and services budgets, their growth, and an AI share (Section 7) gives a band of $920B–$1.31T — almost unchanged in total even though the pool it comes from is being torn up, because the money moves from seats to solutions rather than disappearing (Section 7) — and the plateau's 50% contour — residual factor ∼1.5, 2030 AI revenue ∼$950B — lies in its upper half.

The honest statement. On a plateau, the installed base is more likely than not to earn its 2030 carry only if the sector chains are ∼50% too conservative in aggregate, which is financeable in roughly 85% of budget draws but requires AI to reach ∼25% of an enterprise software and services pool that is no longer growing, up from ∼5% in 2026 (Gartner's $64B of AI platform and model spend against $3.3T [22, 23]) — money that comes out of seat-priced software and consulting hours.

Other spending paths. Under an arms race the contour is off the chart. Under rationalization the feasible and profitable regions overlap: P(profit) is ∼52% at the paper's modes in 2030; siting friction pulls it down because deferred cohorts and site costs land in 2029–30. The zeros in Table 17 for 2027–28 are not a modeling artifact: the 2025–27 cohorts are on the books and demand cannot double fast enough to meet them under any path.

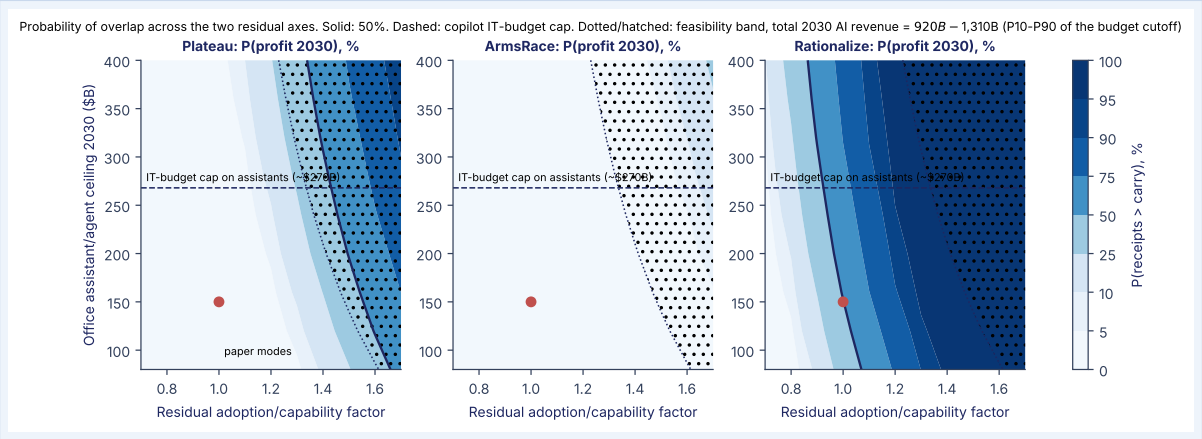


Figure 22: Probability of profit in 2030 over the two residual axes, by capex path. Solid contour: 50%. Dashed line: the IT-budget hard cap on the assistant ceiling (∼$270B). Dotted curves bound the feasibility band: total 2030 AI revenue between $920B and $1.31T, the P10–P90 of the decomposed budget cutoff (Section 7); to the right of the band the demand cannot be financed from enterprise, advertising and consumer budgets. The dot is the paper's modes.

Paid from labor budgets? Three questions the feasibility band raises. The first is the deepest: a16z's *State of Markets* argues that AI's addressable market is "considerably larger than IT budgets" because AI is paid from labor budgets [68] — the $30T payroll, not the $3.3T software-and-services pool.

If so, the band is wrong by a factor of several and the plateau pays easily. The paper keeps the IT-budget band because Section 10 finds that only about a quarter of nominal labor savings reach cash, and over a J-curve; but this is the disagreement on which the bull case turns, and the register cannot settle it from 2026 data.

Additional or displacing? Two further questions the band raises.

- First, is AI spending *additional* to IT budgets or does it *displace* other software and services? Gartner's 2026 forecast has total IT spending growing 14%, most of it AI-driven, so the near-term answer is mostly additional; but the band's AI share is a share of the whole software-and-services pool, so if AI displaces seat-based software and consulting hours one-for-one the cap on AI is the same and the hyperscalers' non-AI cloud revenue shrinks instead — Microsoft can gain AI revenue while losing on conventional Office.
- Second, AI's own efficiency will shrink the services budget it draws on: if AI removes $200–400B of the $1.87T services pool by 2030, the band's upper edge falls by roughly that share of the AI cut. Both effects narrow the feasible region; neither is in the base case, which is therefore generous to the build-out on this point.

No growth rate clears 2027–28. No plausible g clears 2027 or 2028: the 2025–27 cohorts are

a sunk deficit of $100–250B/yr. Under Plateau, $g \approx 49\%$ sustained for four years breaks even in 2030 alone and ∼64% recovers the 2027–28 hole cumulatively. The tornado (Figure 16) says what a Fermi analyst wants to know: the 2026 revenue base and the infrastructure share dominate everything on the supply side; silicon life, opex and the non-AI baseline are second-order; cost of capital and shell life barely register.

The distribution at $g = 49\%$ (Figure 17) is centered near zero — the coin-toss neighborhood by construction. The bottom-up estimate says the sectors do not reach that neighborhood.

Where the data stand. Frontier-lab run-rates rose roughly 3.5× (Anthropic ∼7×, OpenAI ∼2×) between end-2025 and August 2026 [11–13]. Both companies have told investors to expect slower growth in 2026 than trend — roughly 2.2× for OpenAI and up to 4× for Anthropic [14].

Even those guided rates exceed g^*. The labs' figures are the only high-growth disclosures available; Microsoft's consumer assistant has by most accounts disappointed, and Amazon's and Meta's AI revenue is not separately reported, so "ahead of the threshold" rests on two companies.

The paper's position. The build-out pays if the labs' growth halves and then halves again but stays above ∼50% through 2030. The fifteen sector chains put it nearer 14% by 2030 because seats, IT budgets and advertising yields run out before compute does; Sections 10–11 are the mechanisms behind those ceilings; and Section 20 says what would move the distribution.

18 Winners and Losers

The GPU renters and their lenders are most exposed; buyers, integrators and own-chip clouds gain.

In brief

- Most exposed: the GPU renters, Oracle's cloud and their lenders.
- Gaining: buyers, integrators paid on results, and clouds with their own chips.

Table 18: Exposure hierarchy

Tier	Entities	Mechanism	Severity
Existential	Oracle Cloud Infrastructure	$300B+ RPO to non-investment-grade labs; receivables risk if API growth slows [97].	Critical
Existential	Neo-clouds, GPU debt funds	Balance sheets levered on merchant silicon with 3–5 year life; no software ecosystem to buffer hardware deflation [96].	Critical
High impairment	Microsoft	Cut from both sides: ∼$170B/yr capex and the OpenAI round trip on one side; on the other, the largest seat-priced software base in the world (Office, Windows, Dynamics) deflating under agents, a consumer assistant that has lagged, customers paying to avoid Windows 11, and the sharpest exposure to the European sovereignty exit (France, Schleswig-Holstein, Denmark). AI receipts grow while the base that funds the capex shrinks.	High
High impairment	Amazon	∼$220B/yr capex with the Anthropic round trip; balance sheet survives, cloud margins absorb any ASC 360-10 charges on the 2025–27 cohorts.	High
Defensive	Alphabet, Meta	In-house silicon (TPU, MTIA) avoids merchant margins; ad cash flows absorb overcapacity, and the ad channel is a demand pool the others lack.	Moderate
Structural	FLAPD hubs	Tariff squeeze and grid queues versus cheap-power corridors [91, 92].	High
Structural	Seat-priced SaaS, hourly consultancies	Billable-unit collapse under outcome contracts.	High

Table 19: Beneficiaries

Segment	Base	Engine	Horizon
Last-mile outcome operators	US, UK, G20	Gain-share pricing; $80–140B addressable at high gross margin on distilled models.	2026–32
Frontier labs, differentiated	US, Europe, China	Anthropic's enterprise and coding revenue is compounding fastest on reported figures and runs on partners' silicon rather than its own balance sheet; OpenAI carries the largest compute commitments against the largest reported losses; Mistral, DeepSeek and the open-weight labs win on cost, not revenue. If growth holds they are the largest winners; if it decays they are the counterparties on whom the hyperscalers' recoverability forecasts rest.	2026–30
Consumer and edge silicon	Apple, Qualcomm, AMD	1.45B NPUs/yr absorbing routine inference locally.	2026–30
Hardware hedgers	Nvidia (edge, physical AI, open models)	Diversification away from cluster saturation; open-model releases commoditize the layer above the chip.	2026–28
China western corridors	Qinghai, Xinjiang, Gansu	$0.02–0.035/kWh subsidizing embodied AI [v].	2026–35
Sovereign pragmatists	India, Gulf, Korea	DPI and sovereign models on stranded power and open weights.	2026–32
Grid and power industrials	Transformers, cooling, transmission	36–48 month backlogs capture hardware spend first.	2026–30

19 Timeline

If the paper is right: slowing lab growth and write-downs in 2027–28, a spending retreat in 2028–29, a cheaper equilibrium after.

In brief

- 2026–27: startup failures, scrutiny of investor-funded cloud revenue, a first wave of write-downs.
- 2028–29: spending retreats as finance chiefs cut budgets.
- After 2030: a cheaper, more spread-out equilibrium — not the end of AI.

- **2026–27:** startup-cohort failure crosses ∼80%; SEC and auditor scrutiny of related-party cloud revenue; first $50B+ impairment wave across hyperscalers and neo-clouds; secondary GPU spot prices fall by half or more.
- **2028–29:** human-text data wall binds for frontier training [110]; CFOs cut experimental AI budgets; Big-5 capex retreats 30%+ from the 2026–27 peak; neo-cloud restructurings; OCI renegotiates unfulfilled contracts.
- **2030:** 100+ TOPS local silicon standard; open-weight small models the enterprise default; frontier intelligence a low-margin utility; software margin concentrated in domain-specific integrators.

20 What Would Change the Distribution

Two observations would overturn the result on their own — above all, 2028 AI revenue above $400B.

In brief

- AI revenue above $400B in calendar 2028 would overturn the most likely outcome.
- Interim marker: 2027 revenue near $330B is the paper's path; above $350B favours the build-out.
- Paid use of office assistants is the sector to watch.

The paper's result is a distribution, not a yes or no, so the tests below are stated as observations

that would move the distribution decisively rather than as binary refutations. Two are sufficient on their own:

1. **Revenue.** If calendar-2028 end-customer AI revenue across all channels exceeds $400B — i.e. $g \geq 50\%$ has held for two more years from the 2026 base, measured on the same seven-component basis as Table 8 — the plateau path is on track and the paper's most likely outcome was wrong.

   Interim markers: calendar-2027 revenue near $330B is the bottom-up path; above $350B favors the build-out; the sector to watch is office assistants and agents, where the bottom-up ceiling ($150B) and the IT-budget cap ($270B) leave the most room to differ.

2. **Impairment and retreat.** If by end-2030 cumulative AI-asset impairments across hyperscalers and neo-clouds under ASC 360-10 are below $100B *and* aggregate Big-5 capex has not fallen 30% from its peak, the paper's most likely outcome was wrong.

Other observables will move the distribution as they arrive (Appendix H gives the calendar and the re-issue rule), in rough order of leverage: the labs' calendar-2026 bookings and gross margins (the base and θ); Microsoft's next paid-seat disclosure (the assistant ceiling); Data Center Watch's quarterly count (the deferral fraction); the operators' year-end useful-life notes (silicon life); Gartner's 2027 AI-share revision (the feasibility band).

Softer expectations that do not decide the case, because their attribution is weak: BLS professional-services employment shows under 1.5% net AI-attributable displacement; metered frontier API prices fall more than 80% from 2026 while integrator revenue grows.

If the paper is right: the sequence. 2027–28, lab growth decelerates below 2×, the 2024–25 startup cohort thins, auditors scrutinize investor-funded compute contracts, first $50B+ impairment wave; 2028–29, CFOs cut experimental budgets, capex retreats toward the $450–550B the realized g can carry, neo-cloud restructurings; 2030, 100+ TOPS local silicon is standard, open-weight small models the enterprise default, software margin with domain integrators.

Acknowledgments

The first circulated version was reviewed by George Kountouris, Francis Pedraza, Matthew Fitzpatrick and Viraj Mehta, who are thanked as its first reviewers. The last-mile implementer's view — that AI applied to a poorly run process automates the defects, and that the money moves to whoever fixes the process — shaped Sections 10 and 11; the commodities view — economic versus accounting depreciation, the utilization wrinkle, and price converging to marginal cash cost — is Section 14.

Errors remain the author's. The paper is released so that a community can improve it as the data arrive: every input is in an open register with its evidence and its range, and anyone with a better-sourced number is invited to replace it.

A Model Specification

All parameters triangular Triang(min, mode, max); $B.

- Capex history $I_{2023..2026} = 161, 260, 448, 780$ [1, 2]; forward paths Plateau (780 flat), Arms race (1000 then 1100), Rationalize (550 then 500), each held flat to 2035; and an Adaptive path in which next year's capex scales with last year's ratio of receipts to carry, damped (exponent 0.5) and bounded to $400B–$1.1T (Appendix B).

  No crystal ball chooses among the first three: the plateau is the base because it is the operators' stated 2026 level held constant; the arms race is their 2027 trajectory continued; the cut is what an impairment test would force.

  The adaptive path is what a rational operator would do with the same information the model has. Non-AI baseline $N_c = (161 - A_{2023})(1 + g_N)^{c-2023}$, A_{2023} ∼Triang(20, 30, 40), g_N ∼Triang(0.02, 0.06, 0.10). Grid energization cap Triang(1150, 1400, 1680) $B/yr; siting deferral f_{delay} ∼Triang(0.10, 0.20, 0.35) from 2026; deferred capex carries r only. Shell cost uplift κ_{site} ∼Triang(1.02, 1.05, 1.09); opex uplift u ∼Triang(0, 0.03, 0.06).

- Cohorts: ϕ ∼Triang(0.45, 0.52, 0.60); silicon life $= 1/(f_{\text{tr}}/L_{\text{tr}} + (1 - f_{\text{tr}})/L_{\text{inf}})$ with f_{tr} ∼Triang(0.35, 0.45, 0.55), L_{tr} ∼Triang(2.5, 3.5, 4.5), L_{inf} ∼Triang(4, 5, 6); L_{sh} ∼Triang(15, 20, 25); ℓ_{si} ∼Triang(0.5, 0.7, 0.9), ℓ_{sh} ∼Triang(0.2, 0.4, 0.6); straight-line, mid-year.

- Carry: c_{opex} ∼Triang(0.059, 0.0665, 0.074), decomposed; r ∼Triang(0.090, 0.0945, 0.099), CAPM; H_t per Eq. 2.

- Demand: D_{2026} ∼Triang(161, 179, 198) and θ ∼Triang(0.77, 0.815, 0.86), both from the decompositions of Section 7; $D_t = \theta D_{2026}(1 + g)^{t-2026}$, g swept.

- Bottom-up demand: fifteen sectors per Table 6; logistic ramps; common factors on ceilings Triang(0.7, 1.0, 1.4) and ramps Triang(0.7, 1.0, 1.3); circular deduction Triang(8, 12, 18); γ_{sov} applied to sovereign-exposed sectors.

- Secondary variables added at v25: economic depreciation rate δ ∼Triang(0.5, 0.7, 0.9); inference utilization Triang(0.40, 0.45, 0.50) with a doubling case; token price index and marginal cash cost per million tokens (Section 14).

- Limitations: top-down parameters independent (understates spread); no demand saturation (favors the bull at high g); no SPV debt-service cliffs (favors the bull); fixed capex paths except the adaptive path of Appendix B; investor-funded lab compute counted as receipts.

B Beyond 2030: The Horizon to 2035 and a Rational Operator

Ending at 2030 invites the objection that the deficit is a timing artifact: the stock is built ahead of demand, and by 2032 the demand has arrived. This appendix extends the same model to 2035. After 2030 the sector ceilings grow with the budgets that set them — IT spending, advertising and users — at a rate $g_C \sim$Triang(6, 10, 14)%/yr, and the logistic ramps continue; capex paths are held at their 2028–30 levels.

A fourth, *adaptive*, path lets capex respond: each year's capex is last year's scaled by the ratio of receipts to carry, damped by a square root and bounded to \$400B–\$1.1T — the behavior of an operator who reads the same numbers this paper does and neither ignores nor panics at them.

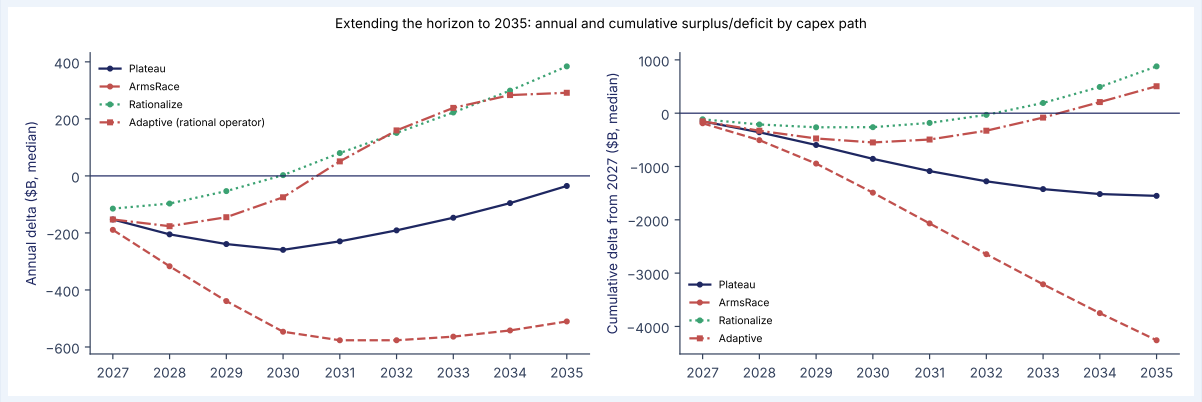


Figure 23: Annual and cumulative surplus or deficit to 2035 by capex path (medians). A plateau's annual deficit narrows to about \$35B by 2035 and it never recovers cumulatively within the horizon; the adaptive path is profitable from 2031 and recovers cumulatively in 2034.

Table 20: 2031–2035: median annual Δ_t (\$B) with P(profit), and cumulative from 2027

Path	2031	2032	2033	2034	2035	Cum. 2027–35
Plateau	−230 (1%)	−190 (4%)	−145 (13%)	−95 (26%)	−35 (42%)	−1,550
Arms race	−575 (0%)	−575 (0%)	−565 (0%)	−540 (0%)	−510 (0%)	−4,260
Rationalize	+80 (83%)	+150 (95%)	+220 (98%)	+300 (100%)	+385 (100%)	+875
Adaptive	+50 (80%)	+160 (99%)	+240 (100%)	+285 (100%)	+290 (100%)	+475

Three readings.

- First, the plateau does not recover by 2035: infrastructure receipts grow from \$480B to \$910B, but the plateau's carry grows too — replacement of short-lived silicon plus the shell cohorts still depreciating — from \$725B to \$930B, so the annual gap is still open at the end of the horizon and the cumulative deficit of ∼\$1.55T is not repaid. "By 2035 it all comes back" is true for the technology and false for the plateau balance sheet.
- Second, the arms race never closes.

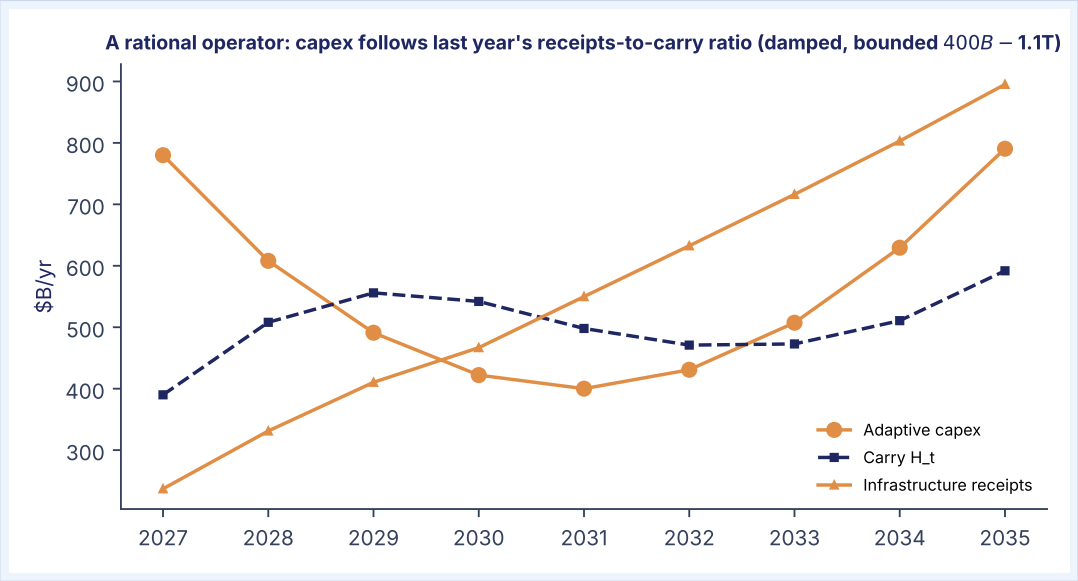


Figure 24: The adaptive path. Capex falls to ∼$400B by 2030–31 as receipts lag carry, then re-expands as receipts overtake it; the stock is right-sized to demand with a two-year lag.

- Third, a 35% cut or an adaptive operator turns profitable in 2030–31 and recovers cumulatively by 2033–34, at a stock that has fallen to roughly $400–500B/yr of capex — close to what Section 17 identified as the level realized demand can carry.

The adaptive path also answers a question the fixed paths cannot: how does the industry stay on the rails? By letting the operators' own recoverability tests do their work a year at a time, rather than by any single actor's failure.

Inflation over the longer horizon. The further out the horizon, the more inflation matters, so it is stated explicitly. Receipts are in today's prices: no inflation uplift is given to revenue, because contracts are fixed in dollars and AI unit prices are falling. The carry charges a nominal 9.45% on the money, which already contains expected inflation, so the annual and cumulative figures in Table 20 and the payback years stand as they are. What inflation changes is how much the owners keep: in today's money the plateau's cumulative hole with interest is about $1.9T in 2035 rather than $2.4T, and its average return is about −1.6% a year rather than +1% — smaller dollars, the same loss of purchasing power. One effect would make the result worse and is left out of the base for lack of a source: power, labor and site costs rising with prices while fixed-price contracts do not (∼$40B a year by 2035 on the plateau). The step-by-step reasoning is in "How long investors wait" (p. 5); the formulas, term by term, in Appendix F.

Growth g is in this sense not an exogenous unknown but the outcome of decisions the operators will make with the same numbers, which is why the paper reports distributions and thresholds rather than a forecast.

C Sector Ceiling Derivations

Each ceiling is a Fermi chain to 2030, as first derived. Where Section 7 later decomposed a ceiling further (assistants, advertising, consumer), the decomposed range in Table 6 supersedes the chain below.

- **Office assistants / agents.** 350M knowledge-worker seats $\times$ 35–55% adoption $\times$ \$25–35/seat/month $\times$ 12 = \$37–83B of seat revenue; agentic and workflow consumption at 1.5–3$\times$ seat revenue = \$55–250B; ceiling capped by an AI share of 3–5% of $\sim$\$5.5T global IT spend = \$165–275B. Mode \$200B. $\theta = 0.6$: routine tasks migrate to on-device NPUs and private small models (Section 6).
- **Advertising uplift.** Meta and Google advertising $\sim$\$500B in 2026; AI ranking, creative and measurement lift yield by 10–20% = \$50–100B; AI-native conversational and generative formats \$30–150B. Mode \$150B. $\theta = 1.0$: the infrastructure owner is the advertiser's platform.
- **Consumer subscriptions.** $\sim$1B monthly users $\times$ 5–10% paid $\times$ \$20–25/month $\times$ 12 = \$12–30B; free-tier advertising at \$30–80/user-year on 300–600M ad-eligible users = \$10–50B; premium tiers and devices remainder. Mode \$80B.
- **Coding tools.** 29M developers [99] $\times$ 50–70% paid $\times$ (\$20–200/month seat + \$1–3k/yr agent tokens) = \$35–95B. Mode \$60B. Non-recurring: refactoring impulse $\alpha e^{-\lambda t}$ with maintenance tail $\beta \sim$Triang(0.05, 0.08, 0.12) of build tokens.
- **Search & internal use.** Google search $\sim$\$250B; AI overviews and modes defend share rather than expand it; incremental monetizable AI search 5–15% = \$12–38B; hyperscaler internal productivity, fraud and recommendation uplift \$15–40B. Mode \$50B.
- **Financial services.** Banking and insurance IT and operations $\sim$\$1.5T; AI share 2–4% = \$30–60B, constrained by model-risk governance (SR 11-7, FINRA) and on-premise deployment ($\theta = 0.75$). Mode \$40B.
- **Customer service / CX.** \$350B contact-center labor; 10–15% displaced by 2030 = \$35–55B of savings; vendors and integrators price at 50–80% of savings = \$25–45B. $\theta = 0.5$: speech and RAG run on small models; 10–35:1 token ratio.
- **Public sector / defense.** Government IT $\sim$\$700B; AI share 4–8% = \$28–56B. Sovereign carve-out γ applies.
- **Healthcare / clinical.** 1.1M US physicians $\times$ 60–80% ambient-scribe adoption $\times$ \$400–600/month = \$3–6B; global multiple 2–3$\times$; prior-authorization, coding, imaging triage \$10–25B. Mode \$35B. Market reports place clinical documentation at \$5B in 2026 [102].
- **Autonomous fleets.** Autonomous-driving and fleet software forecasts of \$8B (2026) to \$32B (early 2030s) [101]; 5–7 year chassis cycles; most inference on-vehicle ($\theta = 0.45$).

- **Generative video / gaming / media.** Cloud GPU cost ∼$0.30/user-hour against consumer willingness to pay; live generative content 100–300M users × $5–10/month = $6–36B [103].
- **Legal & compliance.** $950B legal services; software 2–3% = $19–28B; verification rules and hallucination liability cap adoption. Mode $20B.
- **Science / R&D.** Pharma R&D ∼$300B × 4–8% = $12–24B; materials, climate, engineering simulation $5–20B. Mode $25B.
- **Factory / robotics software.** Operational robot stock ∼4–5M [100] × $2–4k/yr software = $8–20B; bounded by Asian wage floors ($1.05–1.60/hr) below robot TCO (∼$2.9/hr); inference at the edge ($\theta = 0.45$).
- **Eldercare / assistive.** 160M OECD seniors × 15–25% smart-home penetration × $100–200/yr = $2–8B; 85% on-device for privacy ($\theta = 0.15$). 90% of eldercare cost is physical labor software cannot displace.
- **Edge siphon (cross-cutting).** $350\text{M} \times 15 \times 250 \times 500 = 6.6 \times 10^{14}$ routine tokens/yr; at $0.10–0.50/M = $66–330B of potential cloud revenue; 60–85% executed locally ⇒ $40–280B/yr never billed. This is the physical basis for $\theta < 1$ in the office assistant, CX, robotics and eldercare rows.
- **Spatial video tokens (embodied AI).** 4 cameras $\times 30$ fps $\times 3600$ s $\times 62.5$ tokens/frame $= 2.7 \times 10^7$ tokens per camera-hour, $\sim 5.4 \times 10^8$ per robot per 20-hour day; favors $0.02–0.035/kWh corridors over cheap chips.

D Error Propagation Across Chains

The paper combines estimates in three ways, and each has its own propagation rule. All three are checked below against the Monte Carlo, which does not assume any of them.

D.1 Rule 1: within a chain, factors multiply, log-variances add

A single chain is a product, $Y = \prod_i X_i$. With independent factors,

$$\sigma^2_{\ln Y} = \sum_i \sigma^2_{\ln X_i}, \tag{6}$$

so *relative* errors add in quadrature and the loose factors dominate. For a triangular input with min a and max c, $\sigma_{\ln X} \approx \ln(c/a)/4.9$. In this paper every input is tighter than a factor of two: the supply-side inputs have $\sigma_{\ln}$ between 0.06 (cost of capital) and 0.17 (energization lag); the sector ceilings have 0.15–0.25. The chain is where individual expertise enters, and where a referee should attack one factor at a time.

D.2 Rule 2: across chains that are summed, absolute variances add — plus the common factor

Sectors are added, not multiplied: $D = \sum_s R_s$. For independent sectors,

$$\sigma_D^2 = \sum_s \sigma_{R_s}^2 \qquad \Longleftrightarrow \qquad \sigma_{\ln D}^2 \approx \sum_s w_s^2 \, \sigma_{\ln R_s}^2, \quad w_s = \frac{R_s}{D}, \tag{7}$$

so the relative error of the sum is the *share-weighted* root-sum-square of the sector relative errors. Because the shares w_s are squared, a sector with 5% of the total contributes 1/25 as much variance as one with 25%, even at equal relative uncertainty; and because there are many sectors, the idiosyncratic error of the sum is far smaller than that of any one sector. This is the averaging that rewards detail.

What does not average is anything the sectors share. If a common factor M (the M_C of Section 6) multiplies every ceiling — macro adoption, a recession, a regulatory shock — then $D = M \sum_s R'_s$ and

$$\sigma_{\ln D}^2 \approx \sigma_{\ln M}^2 + \sum_s w_s^2 \, \sigma_{\ln R'_s}^2. \tag{8}$$

The common factor adds its full variance once, unweighted, and cannot be diversified away. In practice it dominates: the residual uncertainty of a well-decomposed demand estimate is almost entirely the shared factor, not the sector details.

D.3 Rule 3: supply minus demand, absolute variances add

The result is a difference, $\Delta = \text{Receipts} - H$. Supply and demand share no parameters in this model, so

$$\sigma_\Delta^2 = \sigma_{\text{Receipts}}^2 + \sigma_H^2 \qquad (\text{plus } -2\,\text{Cov if correlated}), \tag{9}$$

and the strength of the conclusion is the z-score Δ/σ_Δ. Two things follow. First, because the uncertainties add rather than the medians, a gap must exceed roughly $2\sigma_\Delta$ before the sign is a Fermi-robust result. Second, if capex and demand were positively correlated in reality (nobody spends into flat demand), the covariance term would *reduce* σ_Δ and sharpen the sign; we do not take that credit.

D.4 Numerical check, 2030, Plateau

The lesson of the table is the one the method section promised. Fifteen sectors, each uncertain by 11–25%, sum to an idiosyncratic uncertainty of 5.1%; assistants carry 40% of that now that the advertising and consumer ceilings are decomposed. What remains — three-quarters of the total

Table 21: Propagation rules versus the Monte Carlo (2030, Plateau, $N = 100{,}000$)

Quantity	**Predicted by rule**	**Observed in MC**
Rule 2, sectors without the common factor		
$\sum_s w_s^2 \sigma^2_{\ln R_s}$ (Table below)	0.0026	
$\sigma_{\ln D}$, idiosyncratic sum	0.051	0.051
Rule 2 with common ceiling factor, $\sigma_{\ln M} = 0.14$		
$\sigma_{\ln D} = \sqrt{0.0026 + 0.0195}$	0.149	0.133[†]
Rule 1, supply chain		
$\sigma_{\ln H_{2030}}$	—	0.047
Rule 3, difference		
σ_{Receipts}, σ_H (\$B)	65, 34	65, 34
$\sigma_\Delta = \sqrt{65^2 + 34^2}$ (\$B)	73	73 (Cov ≈ -4)
Median Δ_{2030} (\$B)		-259
$z = \Delta/\sigma_\Delta$		-3.5
P($\Delta_{2030} < 0$)		0.99

[†]Slightly below prediction because the logistic has not fully reached the ceiling by 2030, so the common ceiling factor passes through at less than unit elasticity.

Table 22: Sector contributions to Eq. 7, 2030 (idiosyncratic, common factor removed)

Sector	**Share** w_s	$\sigma_{\ln R_s}$	$w_s^2 \sigma^2_{\ln R_s}$
Office assistants / agents	0.21	0.16	0.0011
Advertising uplift	0.18	0.11	0.0004
Consumer subscriptions	0.11	0.16	0.0003
Coding tools	0.09	0.16	0.0002
Search & internal use	0.07	0.18	0.0001
Customer service / CX	0.05	0.17	0.0001
Financial services	0.05	0.17	0.0001
Remaining eight sectors	0.01–0.04	0.15–0.25	0.0002 total
Sum	1.00		0.0026 $\Rightarrow \sigma_{\ln D} = 0.051$

demand variance — is the common adoption factor at 14%, which sector detail cannot reduce but which Section 7 splits into an IT-budget part (5%), a price-deflation part (8%) and a residual capability part (10%).

The supply side, a chain of seventeen tight inputs, is uncertain by 5%. Subtracting, the 2030 gap of \$259B against $\sigma_\Delta = \$73$B is a 3.5σ result: robust by the Fermi standard, not a certainty, and its residual doubt lives in the residual capability factor and the assistant ceiling. Those are the two axes of Figure 22.

E Other Derivations

E.1 Carry at the modes, 2028 Plateau

A hand check with round-number inputs from the first draft (opex 8%, return 10.5%, silicon life 4 years); the model's current median is \$535B (Table 5). AI cohorts in service: 2023: 0; 2024: 95; 2025: 283; 2026: 615; 2027: 615; 2028: 308 (half energized). Gross ≈1,915. Silicon 55%: depreciation $1{,}053/4 = 263$; shell 45%: $862/20 = 43$. Opex $0.08 \times 1{,}915 = 153$. Net book ≈1,280; return $0.105 \times 1{,}280 = 134$. $H_{2028} \approx 590$ on these first-draft inputs.

E.2 Enterprise benefit requirement, 2028

$0.7 \times 535 \approx 375$; $\times(1 + 1.5) \approx 940$; $\times 1.2 \approx 1{,}125$. Payroll shares: $1.1/30 \approx 4\%$ global; $1.1/9 \approx 12\%$ US-alone.

E.3 Slack dissipation

$\tau(1 - 0.65)(1 - 0.20) = 0.28\,\tau$; at $\tau = 0.15$: 4.2% of payroll.

E.4 Contact-center ratio

Labor \$350B; displacement 5–10% = \$17–35B; tokens \$1–2B; ratio 10–35:1.

E.5 Break-even revenue levels

Plateau 2030 at $g^* = 49\%$: $179 \times 1.49^4 \approx 880$; at $\theta = 0.815$, infrastructure receipts ≈ 720, against $H_{2030} \approx 710$.

F Every Equation, Term by Term

Each numbered equation in the paper, restated and explained one symbol at a time, with units and a worked number where one helps. Symbols follow the glossary table (Appendix I); a few notational conventions come first.

Conventions

Lower-case ℓ is an energization lag (a fraction); upper-case L is a life in years — they are different quantities and the letters are deliberately different. Lower-case k_s is a sector's logistic ramp rate (per year); k in the Arrhenius and Black equations is Boltzmann's constant — the only place a letter is reused, and it is flagged where it occurs. f_{tr} is the training share of the silicon fleet; f_{delay} is the siting deferral. M_C and M_k are the common factors; m is the enterprise benefit margin. $\omega(e)$ is an edge weight in the circular-flow graph; W is the payroll pool; w_s is a sector share.

Triang(a, b, c) always means a triangular distribution with minimum a, mode b, maximum c. Money is in billions of US dollars per year unless stated; rates are per year; shares are fractions between 0 and 1.

Equation 1: how uncertainties combine in a product

$$\sigma^2_{\ln Y} = \sum_{i=1}^{n} \sigma^2_{\ln X_i}.$$

The estimate, Y, is a quantity computed as a product of n factors $X_1 \cdots X_n$ (a Fermi chain). $\ln$ is the natural logarithm; taking logs turns the product into a sum, $\ln Y = \sum \ln X_i$. $\sigma_{\ln X_i}$ is the standard deviation of $\ln X_i$, which for modest uncertainties is the same as the *relative* uncertainty of X_i (a $\sigma_{\ln}$ of 0.10 means "about ±10%").

For independent factors, variances add: the relative uncertainty of the product is the square root of the sum of the squares of the factors' relative uncertainties. Worked: three factors at 0.10, 0.15 and 0.30 give $\sqrt{0.01 + 0.0225 + 0.09} = \sqrt{0.1225} = 0.35$, not 0.55; the loosest factor dominates.

Equation 2: the annual carry of the installed base

$$H_t = \sum_{c \le t} \sum_{j \in \{\text{si,sh}\}} \left[\frac{G_{c,j}}{L_j} + c_{\text{opex}}\, G_{c,j} + r\, G_{c,j} \left(1 - \frac{t - c + \frac{1}{2}}{L_j} \right) \right] \mathbf{1}\left[t - c + \tfrac{1}{2} < L_j \right] + \; r\, \text{Deferred}_t.$$

The carry, H_t, is the yearly cost of holding the installed base in year t ($B). The outer sum runs

over every cohort year c up to and including t; the inner sum over the two components j of each cohort: silicon (si) and shell (sh). $G_{c,j}$ is the in-service gross value of that component of that cohort ($B): AI-attributable capex A_c times the component's share (ϕ for silicon, $1-\phi$ for shell), times the energized fraction (ℓ_j in the spend year, 1 afterwards), times the site cost uplift κ_{site} for shell.

Inside the bracket, three costs: *depreciation* $G_{c,j}/L_j$, straight-line over the component's life L_j; *facility opex* $c_{\text{opex}}G_{c,j}$ (times $(1+u)$ where dry cooling applies); and *return on net book* r times what is left undepreciated, where $t-c+\frac{1}{2}$ is the cohort's age at mid-year and $1-\text{age}/L_j$ is the undepreciated fraction. The indicator $\mathbf{1}[\cdot]$ is 1 while the cohort is younger than its life and 0 after it has fully depreciated, so retired cohorts drop out.

The final term charges the cost of capital on capital that is deferred (by the grid cap or siting) and not yet earning. Worked, 2028 plateau at the modes: in-service AI gross about $1.9T, of which silicon $1.05T $/4.2$ yr = $250B of depreciation and shell $0.86T $/20$ yr = $43B; opex $0.0665\times 1.9\text{T} = \$126\text{B}$; return $0.0945\times$ net book ~$1.3T = $123B; total ≈ $540B, matching Table 5.

Effective silicon life (harmonic mean)

$$L_{\text{si}} = \frac{1}{f_{\text{tr}}/L_{\text{tr}} + (1-f_{\text{tr}})/L_{\text{inf}}}.$$

Because depreciation is $1/L$ per year, a fleet's average depreciation rate is the share-weighted average of $1/L$, and the effective life is its reciprocal. At $f_{\text{tr}}=0.45$, $L_{\text{tr}}=3.5$, $L_{\text{inf}}=5$: $0.45/3.5 + 0.55/5 = 0.129 + 0.110 = 0.239$, so $L_{\text{si}} = 4.2$ years.

The top-down demand path

$$D_t = \theta\, D_{t_0}(1+g)^{t-t_0}, \qquad t_0 = 2026.$$

The 2026 revenue base, D_{t_0}, is calendar-2026 end-customer AI revenue ($B); g the assumed constant annual growth (0.49 means 49%/yr); $(1+g)^{t-t_0}$ compounds it over $t-t_0$ years; θ converts end-customer revenue to infrastructure receipts. Worked: $179 \times 1.49^4 = 880$ end-customer, $\times 0.815 = 717$ receipts in 2030. The break-even g^* is the g at which this equals H_t; it is found by bisection in the code.

The logistic sector curve

$$R_s(t) = \frac{C_s}{1 + (C_s/R_{s,0} - 1)\, e^{-k_s(t-t_0)}}.$$

At $t = t_0$ the exponential is 1 and the expression reduces to $C_s/(C_s/R_{s,0}) = R_{s,0}$: the curve starts

at the 2026 value. As t grows the exponential shrinks toward 0 and $R_s(t) \to C_s$: it approaches the ceiling. The bracket $(C_s/R_{s,0} - 1)$ sets how far below the ceiling the sector starts; k_s sets how fast the gap closes — half the remaining distance is covered in about $\ln 2/k_s$ years. Worked, office assistants: $R_{s,0} = 30$, $C_s = 150$, $k_s = 0.8$: in 2030, $e^{-3.2} = 0.041$, bracket $= 4$, denominator $= 1.16$, $R_s = 129$.

The sector's growth rate is the slope of this curve divided by its value, which falls from about 60%/yr in 2027 to about 12%/yr in 2030. Sums: $D_t^{\text{BU}} = \sum_s R_s(t)$ and $\text{Receipts}_t = \sum_s \theta_s R_s(t)$, with common factors M_C multiplying every C_s and M_k every k_s, and sovereign-exposed sectors multiplied by $(1 - \gamma_{\text{sov}})(1 - g_{\text{EU}} \cdot \text{ramp})$.

The annual surplus or deficit

$$\Delta_t = \text{Receipts}_t - F_{\text{circ}} - \kappa\, H_t.$$

Receipts less round-trip revenue F_{circ} ($B) less the carry, with κ the sovereignty capital multiplier (1 in the base case, 1.2 in the overlay). Positive is a surplus. P(profit) is the fraction of Monte Carlo trials in which $\Delta_t > 0$; the z-score is $\text{median}(\Delta_t)/\text{sd}(\Delta_t)$.

Realized enterprise benefit

$$B_{\text{realized}} = W\,\tau\,(1 - \sigma_{\text{slack}})(1 - \nu_{\text{verify}}) - C_{\text{severance}}.$$

The payroll pool, W, is the wage bill AI could act on ($T); τ the nominal fraction of work time AI saves; $(1 - \sigma_{\text{slack}})$ the fraction of that saving not absorbed as slack; $(1 - \nu_{\text{verify}})$ the fraction not consumed by verification; $C_{\text{severance}}$ one-time separation costs. Worked at the modes: $\tau \times 0.35 \times 0.80 = 0.28\,\tau$; with $\tau = 0.15$, 4.2% of payroll — $1.26T on the $30T global pool before severance.

The enterprise benefit requirement

$$B_{\text{req}} = S_{\text{ent}}(1 + m), \qquad S_{\text{ent}} = H_{\text{ent}}(1 + \mu_{\text{integ}}), \qquad H_{\text{ent}} = f_{\text{ent}} H_t.$$

The enterprise share, f_{ent} (≈0.7), is the part of the carry that enterprises must fund; μ_{integ} the integration spend per dollar of software and tokens; m the required margin over cost. Worked, 2028: $0.7 \times 540 = 378$; $\times 2.5 = 945$; $\times 1.2 \approx 1{,}130$, i.e. ~$1.1–1.2T.

Propagation across summed chains (Appendix D)

$$\sigma^2_{\ln D} \approx \sigma^2_{\ln M} + \sum_s w_s^2\, \sigma^2_{\ln R_s}.$$

Total demand, $D = M \sum_s R_s$, is a sum of sectors with a common multiplier M ($= M_C$ here). Sector s's share is $w_s = R_s/D$. The relative variance of a sum of independent terms is the share-weighted (squared) sum of their relative variances — small sectors contribute almost nothing — plus the common factor's variance, which enters once, unweighted, because it moves every term together. Worked: fifteen sectors at 0.11–0.25 with the shares of Table 22 sum to 0.0026 ($\sigma = 0.051$); adding $\sigma_{\ln M} = 0.14$ gives $\sqrt{0.0026 + 0.0195} = 0.149$.

Propagation across the difference

$$\sigma^2_{\Delta} = \sigma^2_{\text{Receipts}} + \sigma^2_{H} - 2\,\text{Cov}(\text{Receipts}, H).$$

Absolute (not relative) variances add for a difference; the covariance is near zero here because supply and demand share no inputs. Worked: $\sqrt{65^2 + 34^2} = 73$; $z = -259/73 = -3.5$.

The incumbent's revenue ratio

$$\frac{\text{Rev}_{2030}}{\text{Rev}_{2026}} = (1 + g_{\text{seat}})^4\,(1 - \text{EU})\,\big[1 - \epsilon\big((1+p)^4 - 1\big)\big]\,(1+p)^4.$$

Seats fall with the agent-driven trend $(1+g_{\text{seat}})^4$, the sovereignty exit $(1-\text{EU})$, and the price-driven loss ϵ times the cumulative price rise; price rises by $(1+p)^4$. Worked at the modes: $0.97^4 = 0.885$; $\times 0.92 = 0.814$; price rise $1.08^4 - 1 = 0.36$, seat loss $0.35 \times 0.36 = 0.126$, factor 0.874; $\times 1.36$: ratio $= 0.814 \times 0.874 \times 1.36 = 0.97$ — revenue about flat.

Arrhenius acceleration

$$AF = \exp\left[\frac{E_a}{k}\left(\frac{1}{T_1} - \frac{1}{T_2}\right)\right].$$

The acceleration factor, AF, is the factor by which a temperature-driven failure rate rises from absolute temperature T_1 to T_2 (kelvin); E_a the activation energy in electron-volts; k Boltzmann's constant, 8.617×10^{-5} eV/K. Worked: $E_a = 0.7$ eV, $T_1 = 333$ K (60°C), $T_2 = 343$ K (70°C): $\frac{0.7}{8.617\times10^{-5}}(1/333 - 1/343) = 8124 \times 8.76 \times 10^{-5} = 0.71$; $AF = e^{0.71} = 2.0$. Failure rate doubles per 10°C in this range.

Black's equation

$$\text{MTTF} \propto J^{-n}\, e^{E_a/kT}.$$

Mean time to failure by electromigration falls with current density J raised to a power n (typically about 2) and rises with the same Arrhenius exponential; high current and high temperature together shorten life.

Cost of capital (CAPM and WACC)

$$r_e = r_f + \beta\,\text{ERP}, \qquad r = \frac{E}{V} r_e + \frac{D}{V} r_d (1 - T_{\text{tax}}).$$

Cost of equity: risk-free rate plus beta times the equity risk premium. WACC: equity weight times cost of equity plus debt weight times after-tax cost of debt. Worked: $4.3 + 1.2 \times 5.0 = 10.3\%$; $0.82 \times 10.3 + 0.18 \times 6.5 \times 0.79 = 8.45 + 0.92 = 9.4\%$.

Real return and amounts in today's money (v28)

$$\rho_{\text{real}} = \frac{1+\rho}{1+\pi} - 1, \qquad X_t^{2026\$} = \frac{X_t}{(1+\pi)^{t-2026}}.$$

ρ is a return in dollars of each year (nominal), for example the average return to date in Table 2; π is inflation per year (register entry `inflation`, 2.0 / 2.6 / 3.7%); ρ_{real} is the same return in today's purchasing power. X_t is any dollar amount in year t (a cumulative deficit, a contract payment); $(1+\pi)^{t-2026}$ is the price level relative to 2026; $X_t^{2026\$}$ is the amount in 2026 dollars. Worked: $\rho = 9.45\%$, $\pi = 2.6\%$ gives $1.0945/1.026 - 1 = 6.7\%$; \$2.41T owed in 2035 is $2.41/1.026^9 \approx \$1.9$T in 2026 dollars (the Monte Carlo median, \$1.88T, uses the drawn inflation). Because the divisor is positive, a sign — and therefore a payback year — never changes; the WACC r is nominal and is not deflated again.

Internal rate of return

$$\sum_{t=0}^{n} \frac{F_t}{(1+d)^t} = 0.$$

The project's cash flows, F_t, are its money in and out (negative outlay at $t = 0$, positive returns after); d is the discount rate. The IRR is the d that makes the discounted flows sum to zero. A hurdle rate is the minimum IRR a firm accepts.

G Every Input, Appraised

Fermi's discipline is to do one's best on each number and to show the work so that anyone with better information can replace it. This appendix does that for every input in the register. For each: what is actually known and from whom; the range chosen and why; how far the source can be trusted, including where a company has a reason to shade the figure; what would improve it; and, where we have a view, what we think is likely to happen.

Ranges are triangular (min / mode / max) unless stated. The register (`parameters.json`) is the place to substitute a different opinion; the rebuild script shows what it does.

A general caution that applies throughout, and a request. Corporate disclosures in this area are made by parties with a stake in the answer: hyperscalers choose accounting lives; labs choose run-rate months and revenue bases; forecasters sell the forecasts they publish; opposition groups count victories.

None of that makes a figure false or implies bad faith, and nothing below is a claim about any company's conduct; it is the ordinary observation that a reader should ask "who benefits from this number being large (or small)?" and weight accordingly.

Where we note an incentive, that is what it is — an incentive, not an accusation. The request follows from it: the companies concerned could remove most of this appendix by disclosing a few numbers they already have — paid seats and their trend, AI revenue on a stated basis, compute cost as a share of lab revenue, accelerator lives in service.

Better guidance would cost them little and would replace inference with fact in every analysis of this kind, including those of their own lenders and auditors.

Supply side

Capex history, I_c (161, 260, 448, 780). Known well. 2023–25 are Epoch AI's reconstruction from XBRL filings (cash PP&E plus new finance leases), which is the best available basis and reconciles with company statements. 2026 is guidance, and guidance has been revised upward all year; companies have an incentive to guide high (signals commitment to investors and to each other) and then spend it. Improve with: the October actuals and the Q4 10-K cash-flow statements; note whether finance leases are growing faster than cash capex, which moves cost off the capex line. Likely: 2026 lands within $40B of guidance; the October calls gave the first signal on 2027: every company that gave a direction pointed up (What Is New in Version 28).

AI capex in 2023, A_{2023} (20 / 30 / 40). Inferred, not disclosed. Total capex was flat in 2023 while H100 purchases began; Nvidia's data-center revenue that year ($47B) and the Big-5's share of it bound the figure. The range is honest about the inference. Improve with: any company-level statement about 2023 AI spend. Likely: near the mode; it matters mainly because it pins the baseline.

Non-AI baseline growth, g_N (2 / 6 / 10 %/yr). Judgment. Fulfillment capex is cyclical, ordinary cloud refresh tracks non-AI cloud revenue ($\sim$15%/yr) at a lower capital intensity. Improve with: Amazon's segment capex, Microsoft's and Alphabet's statements about non-AI infrastructure. Likely: 4–8%; the low end if capital is being diverted to AI.

Silicon share, ϕ (0.45 / 0.52 / 0.60). Anchored on Nvidia's data-center revenue against AI-attributable capex, plus custom silicon, memory and networking. The trap is dividing by total capex rather than AI capex. Companies do not disclose the split; Nvidia's share of Big-5 purchases is estimated. Improve with: any hyperscaler statement of "servers and equipment" versus "land and buildings" in the PP&E note (Meta and Microsoft give this). Likely: the mode; rising if custom silicon displaces shell-heavy new builds, falling if power infrastructure costs keep rising.

Training share of fleet, f (0.35 / 0.45 / 0.55). Judgment. Frontier training clusters are a minority of installed accelerators by count and a larger share by capital. No company discloses it. Improve with: statements about inference versus training capacity (Microsoft has made them qualitatively). Likely: falling over time as inference scales.

Training-cluster life, L_{tr} (2.5 / 3.5 / 4.5 yr). Physics and field data, not accounting. Arrhenius acceleration, the 24/7 duty cycle, Meta's reported failure rates, and the economics of the power slot argue for the short end; A100s still rented argue for the long.

The companies' accounting lives (5–6 years) are longer than this, and the companies have an incentive to keep them long (each year added to useful life reduces reported depreciation by billions). Amazon's 2025 shortening to five years, "due to the pace of AI," is the one disclosure that cuts the other way and is the most credible datum here.

Improve with: the December 10-K useful-life notes; any field reliability data; secondary-market prices for H100s. Likely: the mode; an impairment or life shortening at one operator would move the others.

Inference-fleet life, L_{inf} (4 / 5 / 6 yr). Bounded above by the accounting lives (a company cannot credibly claim its assets last longer than it depreciates them) and below by the training life.

Same corporate incentive as above. Likely: the mode.

Shell life, L_{sh} (15 / 20 / 25 yr). Industry norm; low leverage on the result. Improve only if evidence emerges that AI halls are being rebuilt for new density standards faster than that.

Energization lags, ℓ_{si} (0.5 / 0.7 / 0.9), ℓ_{sh} (0.2 / 0.4 / 0.6). Judgment from build times: silicon racks within one to three quarters, shell takes twelve to twenty-four months. Low leverage after decomposition. Improve with: any disclosed construction-in-progress balances (the PP&E note shows "construction in progress," which is exactly un-energized capital).

Facility opex share, c_{opex} (5.9 / 6.65 / 7.4 % of gross). Decomposed from PUE, tariff, utilization, capex per MW, staffing, tax, network. The tariff and PUE are public; staffing and maintenance are judgment. Improve with: any operator's disclosed cost per MW-year; colocation providers' (Equinix, Digital Realty) unit costs are the nearest public proxy.

Likely: rising, as tariffs rise and dry cooling spreads. *Second anchor (v27):* Goldman Sachs, citing Epoch AI, uses $836M per GW-year of non-depreciation operating cost, about 2% of capital — the paper's power line alone.

The 4.6% gap (staffing, property tax and insurance, network, other) is the one input on which the two supply-side frameworks differ materially (Section 16, Table 11); it is worth $85–115B/yr of carry in 2028–30. Flagged: adopting the lower anchor would be a material re-issue under Appendix H and awaits a sourced operator figure.

Cooling opex uplift, u (0 / 3 / 6 %). Engineering estimate of dry versus evaporative cooling. Improve with: the fraction of new capacity in water-constrained jurisdictions. Likely: the mode, rising with siting friction.

WACC, r (9.0 / 9.45 / 9.9 %). CAPM with Damodaran inputs. The one input that is honestly well known; changes with rates. Improve with: the January update.

Inflation, π (2.0 / 2.6 / 3.7 %/yr; new in v28, presentation only). Minimum: the Federal Reserve's longer-run 2% goal; mode: September 2026 core CPI, 2.6%; maximum: September headline CPI, 3.7% [133, 134]. Used only to restate returns and deficits in today's money. It is not applied to receipts (contracts are fixed in dollars, AI unit prices fall, ceilings use today's prices) and not to the payback test, because the WACC is already nominal — applying it there would count

inflation twice. Improve with: the monthly CPI release; escalation clauses in power and colocation contracts, which would let facility opex rise with prices in the base case.

Grid energization cap (1150 / 1400 / 1680 $B/yr). 22–40 GW/yr of connectable new AI load, globally, at $38–55M/MW. Weakly sourced: assembled from utility and queue reports, not a single dataset. Does not bind on a plateau, so its looseness does not matter unless capex exceeds ∼$1.3T.

Improve with: a consolidated GW-per-year connection figure from the grid operators. *High anchor (v27):* Goldman Sachs's semiconductor build implies 20, 35 and 57 GW of AI deployments worldwide in 2026, 2027 and 2028 [69]; the 2028 figure is above this range's top and is the observable to test against utility energization data.

Siting deferral, f_{delay} (10 / 20 / 35 %). Calibrated on Data Center Watch's $130B per quarter of blocked or delayed projects against a pipeline of order $1T. Data Center Watch tracks opposition outcomes and has an incentive to count broadly; its figures are project values, not annual spend, and most delayed projects eventually proceed elsewhere.

The range discounts for both. Improve with: an independent count; the fraction of delayed projects that were ultimately built. Likely: rising through 2027 as moratoria spread, then falling as developers move to jurisdictions that want them.

Site cost uplift, κ_{site} (1.02 / 1.05 / 1.09). Judgment: community-benefit agreements, water mitigation, private generation, relocation premia. Improve with: disclosed terms of any large community-benefit agreement.

Sovereignty capital multiplier, κ_{sov} (1.1 / 1.2 / 1.3; overlay only). Engineering judgment about utilization and scale of smaller in-jurisdiction facilities. No regulator publishes it. Kept out of the base case for that reason.

Demand side

The 2026 base, D_{2026} (161 / 179 / 198). Seven components. Anthropic's first half is now filed (S-1); OpenAI's figures, and Anthropic's third quarter, still rest on figures the companies chose to disclose, in the months they chose to disclose them, on a basis (gross, for Anthropic) that flatters the figure; both companies were raising capital at the time. Run-rates overstate calendar bookings. The hyperscaler component depends on what Microsoft counts in its "AI business," a basis it has not fully defined.

The advertising component is the least observable; Meta and Google attribute growth to AI on their calls without publishing the decomposition. The overlap correction is our own. The incentive on every component points upward. Improve with: January's 10-Ks (audited), an OpenAI S-1, and Anthropic's amended S-1 with third-quarter figures.

v28: Anthropic's S-1 now gives an audited first half ($16.3B), within the v27 range; the September press report of a $100B+ exit run-rate, which had raised the register to $187B, is not supported by it. Likely: calendar-2026 bookings near the mode; the run-rate figures will look generous in retrospect.

Cloud-capture share, θ (0.77 / 0.815 / 0.86), θ_{lab} ($\sim$0.635). OpenAI's reported margin and Azure spend are leaked, unaudited figures; Anthropic's margin is undisclosed. The labs, raising capital, have the ordinary incentive to present improving margins. Improve with: the S-1; any audited lab financials.

Likely: θ_{lab} falls over time as the labs' margins improve — which is good for the labs and bad for the infrastructure owners, and is the paper's central value-capture argument in one number.

Circular flows, F_{circ} (8 / 12 / 18). From related-party notes and press. Small; kept for completeness and because readers will look for it. Improve with: the 10-K notes.

Sector bases, $R_{s,0}$. Sum to about $205B, above the $179B channel count because sectors count spend the channel count nets out; not independent evidence. Individual sector bases are judgment allocations. Improve with: any vendor's sector revenue disclosure.

Sector ceilings, C_s. The paper's most consequential judgments. Each is a chain (Appendix C). The two that matter: office assistants (100 / 150 / 230), anchored on Microsoft's disclosed 20M paid seats — Microsoft discloses seat counts at its discretion and has not committed to a regular series — and on an IT-budget hard cap; and advertising (105 / 136 / 170), anchored on Meta's disclosed lifts — disclosed by a company with an interest in AI being credited for ad growth.

Both have an upward incentive at the source and the ranges allow for it. The remaining thirteen are smaller and their errors average. Improve with: Copilot seats each quarter; Gartner's application-software category data; Meta's and Google's ad-revenue decomposition if ever given. Likely: assistants at or below the mode unless agents are trusted with whole workflows; advertising near the mode.

Ramp rates, k_s. Judgment about time-to-saturation by sector, calibrated so that 2027 growth matches the labs' guided deceleration. Improve with: 2027 actuals.

Sector cloud shares, θ_s. Judgment about on-device, on-premise and integrator leakage by sector. The edge-siphon chain and the last-mile evidence support the shape; the levels are estimates. Improve with: any data on the share of enterprise inference running outside hyperscaler clouds (surveys exist; none are authoritative).

Common factors, M_C (0.7 / 1.0 / 1.4), M_k (0.7 / 1.0 / 1.3). Judgment about how much macro and capability background the sectors share. This is where the residual doubt lives and it is stated as such. Improve only by experience.

Post-2030 ceiling growth, g_C (6 / 10 / 14 %/yr). Generic; deliberately generous to the build-out. Should be tied to the torn-up budget pool (seat deflation, services shrinkage) in a later version, which would lower it.

European displacement, g_{EU} (3 / 5 / 8 % of sovereign-exposed demand by 2030). From the sovereignty survey (a vendor of private email, with a stake in the answer), France's mandate, and the German state exits. Probably conservative given a national government has now moved. Improve with: procurement announcements; the 2027 survey. Likely: above the mode.

Sovereignty carve-out, γ_{sov} (15 / 25 / 35 %; overlay only). Judgment; kept as an overlay.

Residual adoption factor (swept, not ranged). The one input the paper refuses to assign a range to, because no 2026 data bear on it. It is whether agents become trustworthy with whole workflows and how fast enterprises reorganize around them. Our view, for what it is worth: the sector chains already assume substantial adoption; a residual factor of 1.5 on top of them — what the plateau needs — would mean the largest and fastest enterprise software adoption in history. Possible; not the base case.

Feasibility band

Software and services pools (1440, 1870 $B). Gartner, whose forecasts moved 3.4 points on the same year within five months and who sells the forecasts. The levels are more reliable than the growth rates. Improve with: Gartner's next update; cross-check against IDC.

Seat share of software (0.50 / 0.55 / 0.60). Judgment. Improve with: Gartner's application-versus-infrastructure split.

Seat-SaaS growth, g_{seat} (-6 / 0 / $+5$ %/yr; secondary). The market has repriced the sector on the assumption of decline; Atlassian's seat decline is the first hard datum; vendors have an incentive to report consumption metrics in place of seat counts. Improve with: quarterly seat disclosures from the vendors that still give them. Likely: negative; the question is how negative.

Reallocation to AI (12 / 20 / 32 %; secondary). Pure judgment: how much of the seat and services money becomes AI-solution spend rather than savings returned to the CFO. The most improvable number in the paper with the least data. Improve with: any vendor's disclosure of AI-consumption revenue replacing seat revenue (Salesforce, ServiceNow, SAP); Gartner's 2027 category data. Likely: the mode, with the money arriving later than the seat losses.

Infrastructure software and services growth (4/8/12; -2/3/7 %/yr). Judgment; services could shrink faster if AI removes consulting hours quickly.

European pool displacement (10 / 20 / 35 %). As for g_{EU}; applied to the pool rather than to demand.

New AI spend (2 / 4 / 7 %). Judgment; small.

Advertising and consumer caps (140/170/200; 80/105/130). From the decomposed ceilings; same sources and biases as above.

Incumbent case

Microsoft 365 seats and price (420 / 450 / 480 M; $19 / 21 / 23). Widely quoted; not verified against a filing; Microsoft quotes seats selectively. The illustration hangs on these two numbers and they are flagged; a single disclosed seat series would settle it. Improve with: the 10-K segment revenue and the last disclosed seat count.

Price growth, p (5 / 8 / 12 %/yr). From the announced July 2026 increases. Microsoft's incentive is to raise price to offset seats; it has done so.

Seat elasticity, ϵ (0.15 / 0.35 / 0.60; secondary). Judgment; enterprise software has historically been sticky, agents and sovereignty exits make it less so. Improve with: renewal data, if any vendor ever discloses it.

Agent seat change, EU exit, attach. Judgment ranges consistent with the sector chains; the seat trend is now anchored on Microsoft's disclosed +6–7% commercial seat growth through FY26, from which the model assumes deceleration. Attach (12 / 22 / 35 % by 2030, from ∼6.5%) is the number that decides the illustration and the one a regular disclosure would settle.

Water and thermal

WUE, evaporative share, E_a. Engineering ranges from public sources (ASHRAE, JEDEC, operator sustainability reports — which have an incentive to report improving WUE). Used in the text, not in the carry.

What we think is likely, in one paragraph

The supply-side numbers will be settled by filings within two quarters and are unlikely to move the carry by more than 10%. The demand-side base will come in near its mode once audited figures replace run-rates, and θ will drift down as the labs' margins improve.

The sector ceilings will hold except for office assistants, where the answer depends on agent adoption that no one can see from here, and advertising, where Meta and Google will keep attributing growth to AI whether or not the attribution is clean.

The budget pool will be smaller and more reallocated than the base case assumes, hurting seat-priced incumbents more than the aggregate. Siting friction will peak in 2027. The result — a sunk deficit in 2027–28 under every path, a plateau that pays only with adoption far above what is visible, and a rational operator who cuts to $400–500B and recovers by 2034 — is more likely to be moved by a capex decision than by any demand surprise. That decision is the thing to watch; the October calls pointed spending up, not down.

H Update Protocol: Keeping the Estimate Live

Every number in this paper is a function of a register of inputs, each with a source, a source date, the date its source next publishes, and the model parameter it feeds. The register (`parameters.json`),

the model, and a rebuild script are deposited with the paper. Updating is mechanical: change the input, run the rebuild, read the delta.

The register

Fifty-three entries in five groups — supply (capex history, silicon share, lives, opex, WACC, inflation, lags, grid and siting), demand (the 2026 base and its components, cloud-capture share, sector ceilings, European displacement, common factors), feasibility (software and services pools, seat share, seat growth, reallocation), the incumbent worked case (seats, price, attach, elasticity), and the re-issue rule.

Entries marked *secondary* are swept in their own figures rather than trusted at a range. Two commitments follow from the register: nothing enters the model except through it, so the provenance trail is complete; and any reader can substitute their own value and rebuild.

The calendar

The re-issue rule

After each rebuild the script reports the change in three summary statistics against the previous run: the 2030 plateau z-score, the 2030 plateau break-even growth g^*, and P(profit, 2030) under rationalization. A change is *minor* if $|\Delta z| < 0.5$, $|\Delta g^*| < 5$ points and $|\Delta \text{P}| < 15$ points: tables are updated, the version number is incremented, and no announcement is made.

A change is *material* if any threshold is crossed, or if any registered 2026 observable arrives outside its P10–P90 range: the paper is re-issued with a delta log — a table of every input that moved, its old and new range, its source, and the effect on the three statistics.

Cadence is set by the calendar: a rebuild after each Big-5 earnings week and after each Nvidia report, and a material re-issue whenever the rule fires.

A dry run

To test the loop before it is needed: (written before the October calls, kept as a worked example) suppose the calls had put 2026 capex at \$800B and calendar-2026 AI revenue at \$195B rather than \$179B. Rebuilding gives $g^*_{2030} = 46\%$ (from 49%), $z = -3.57$ (from -3.54) and P(profit, rationalize, 2030) two points lower: all three inside the minor thresholds.

The higher base helps the demand side, the higher capex hurts the supply side, and they nearly

Table 23: Disclosure calendar and what each event moves

Date	Event	Register entries touched
Oct. 21–29, 2026 (done, v28)	Microsoft, Alphabet, Amazon, Meta Q3 calls	2026 capex actuals and 2027 guidance (capex history, paths); M365 Copilot paid seats and any seat-count change (assistant ceiling, incumbent case); Advantage+ run-rate (advertising ceiling); Gemini MAU (consumer ceiling); AI run-rates (2026 base)
Oct.–Nov. 2026 (pending)	Data Center Watch Q3 report	Siting deferral fraction
Oct.–Nov. 2026 (pending)	Gartner Q4 IT-spending update	Software and services pools; AI-share signal (feasibility band)
Nov. 19, 2026	Nvidia Q3 FY27	Data-center revenue (silicon share; capex cross-check)
Monthly	Lab run-rate reports (Epoch AI revenue dataset)	2026 base; growth versus g^*
Dec. 2026	Oracle Q2 FY27	Big-5 capex; RPO
Jan. 2027	Damodaran cost-of-capital update	WACC
Late Jan. 2027	Big-4 Q4 calls and 10-Ks	Calendar-2026 revenue test (interim marker); useful-life notes (silicon lives); related-party notes (circular flows); capex 2027 guidance
Q1 2027	OpenAI S-1 if it becomes public	Audited lab revenue, margin, compute commitments (θ_{lab}, base)
Quarterly	Seat-metric disclosures (Atlassian, Salesforce, ServiceNow, Adobe)	Seat-SaaS growth (secondary variable)
Mar. 2027	State of Digital Sovereignty 2027 survey	European displacement
Jan. 2028	Calendar-2027 revenue	Interim marker: ∼$330B is the bottom-up path, above $350B favors the build-out
Jan. 2029	Calendar-2028 revenue	The revenue test: above $400B overturns the most likely outcome

cancel. A disclosure that Copilot paid seats had reached 40M, by contrast, would move the assistant ceiling's floor and be reported as material.

Delta log: version 28 (29 October 2026)

Table 24: Register entries changed in v28 and the effect on the summary statistics

Entry	v27	v28	Source
2026 revenue base, D_{2026} ($B)	171 / 187 / 202	161 / 179 / 198	Anthropic S-1 (filed H1) and reported Q3 [123, 124]; component table, Section 7
Anthropic 2026 bookings ($B)	50 / 57 / 65	53 / 56 / 60	As above
OpenAI 2026 bookings ($B)	26 / 29 / 33	29 / 32 / 35	Q2 booked $6.7B, Aug. run-rate $40B [16, 48]
Big-5 capex 2026 ($B)	780	780 (sources refreshed)	Q3 releases and calls [115, 118, 120, 121]
Street capex 2027 / 2028 ($B)	1,050 / 1,150	1,100 / 1,150	[126]
SpaceX/xAI AI capex (new; overlay)	—	0.5, 5.6, 12.7, ∼75 (2023–26); hold or ∼150/yr	IPO filing; Q2 and Q3 calls [128–131]; not in the base until v29
Inflation, π (new; presentation only)	—	2.0 / 2.6 / 3.7%	Fed 2% goal; Sep. 2026 core and headline CPI [133, 134]; no effect on g^*, z or payback years
Shell and silicon lives	15/20/25; 4/5/6	unchanged; anchors added	Microsoft accounting changes and capex mix [118, 119]
Effect: plateau 2030 deficit $-255 \to -259$; z $-3.47 \to -3.54$; g^*_{2030} 48%→49%; P(profit, rationalize, 2030) 54%→52%. *Minor* under the rule.			

Figures are regenerated from the v28 register. The v28 rebuild reproduces the results tables of the body (Tables 13 and 15) to the precision quoted: those tables were computed on a $179B base, while v27's abstract quoted a register run on the superseded $187B base ($255B deficit, $g^* = 48\%$). Version 28 brings the register, the abstract and the tables into line.

Commitment for this release

Version 28 (29 October 2026) is the post-earnings rebuild: it carries the delta log above, the rebuilt tables and figures, and the statement of what the calls did to the summary statistics (What Is New in Version 28). Version 28.1 will add Nvidia (19 November), Oracle (December) and Anthropic's amended S-1 with third-quarter figures, whether or not the re-issue rule fires.

History: v26 (30 September) was the pre-earnings estimate; v27 (15 October) added the Goldman Sachs reconciliation. Register changes made between 29 and 30 September (the OpenAI and Anthropic September disclosures, the batch share, the effective-price tier) rebuilt as minor under the

rule: z $+0.07$, g^*_{2030} -1 point, P(profit, rationalize, 2030) $+2$ points.

Formats

The paper is released as LaTeX source and PDF, deposited on Zenodo with the register, model and figure scripts; the PDF is the reading copy and the source is the object of record. Word and other office formats are produced only for reviewers' comments and are not released.

What is not automated

Judgment ranges — the common factors, the residual adoption factor, the reallocation share, elasticities — do not update from a feed and are re-examined only when a disclosure bears on them. The re-issue rule guards against the two failure modes an updated model is prone to: over-reacting to one quarter, and quietly drifting through many small changes that add up to a different paper.

I Glossary

Terms are grouped by discipline and listed alphabetically within each group; a table lists every model variable and parameter with its symbol, register name, units, base range and meaning; and a final section explains the phrases and idioms the paper relies on. Where a term is used with a paper-specific meaning, that meaning is given.

Paper-specific terms and model symbols

AI-attributable capex (A_c) Big-5 capex in year c minus a non-AI baseline (fulfillment, ordinary cloud refresh). Only this part enters the carry.

Big-5 Microsoft, Alphabet, Amazon, Meta, Oracle — the five whose capex Epoch AI tracks and whose infrastructure hosts most frontier AI.

Break-even growth (g^*) In percent per year (0.49 = 49%/yr). The constant annual growth rate of end-customer revenue from 2026 at which infrastructure receipts equal carry in a given year. Held constant by construction so that one number can be tested; the bottom-up growth is not constant (it decays).

Carry (H_t) The annual cost of owning the installed base in year t: depreciation plus facility opex plus a return on net book value. The revenue the base must earn just to stand still.

Ceiling (C_s) In $B. A sector's maximum 2030 end-customer revenue, set by a physical or budgetary

constraint (seats, IT budgets, ad yields, users). Given as a triangular range; the logistic never quite reaches it.

Cloud-capture share (θ_s; θ) Dimensionless, 0–1. The fraction of sector s's end-customer revenue that becomes infrastructure receipts, after the lab's margin, on-device execution, on-premise deployment and integrator capture. θ without a subscript is the revenue-weighted average; θ_{lab} is the same quantity for the frontier-lab channel alone, i.e. the labs' compute cost as a share of their revenue.

Cohort Capital spent in one calendar year, tracked as a unit through its own depreciation life. A *vintage model* sums the cohorts alive in each year.

Common factor A multiplier drawn once per Monte Carlo trial and applied to every sector's ceiling (and a second to every ramp), representing the macroeconomic and technological background all sectors share — recession, rates, regulation, or a capability step. Without it, fifteen independent sectors would average to a falsely narrow total.

End-customer revenue (D_t; $R_s(t)$) What buyers — enterprises, consumers, advertisers — pay in year t for AI products and services, in $B. D_t is the total; $R_s(t)$ is one sector's part of it, and $D_t = \sum_s R_s(t)$. It is counted *before* the frontier labs take their margin and before the part that never reaches a cloud (leakage) is removed. See Figure 3.

Energization Connecting built capacity to grid power so it can run. The *lag* (ℓ) is the share of a cohort energized in its spend year; the rest follows a year later.

Feasibility cutoff / band In $B. The most that could be spent on AI in 2030 out of the enterprise software and services pool — itself decomposed into seat-priced software, infrastructure software, and services, each with its own growth, less the share displaced from US vendors — plus advertising and consumer caps. The cutoff is uncertain, so it is drawn as a band from its P10 to its P90 ($920B–$1.31T); its P50 is ∼$1.10T.

Fermi chain A quantity estimated as a product of several separately-bounded factors, in the manner of Fermi's piano-tuner estimate. In this paper each factor is bounded to tens of percent, not to an order of magnitude; the Fermi label refers to the method of decomposition and propagation, not to the precision.

Grid energization cap Global capacity to connect new AI load each year, in GW/yr; capex above it is deferred.

Infrastructure receipts (also "receipts", "cloud receipts") The part of end-customer revenue that reaches the owners of the data centers, in $B: $\text{Receipts}_t = \sum_s \theta_s R_s(t)$. This, not end-customer revenue, is what is compared with the carry.

Last-mile operator An external firm that delivers AI outcomes to an enterprise on gain-share pricing, typically on small open-weight models.

Logistic The S-shaped saturation curve $R(t) = C/[1 + (C/R_0 - 1)e^{-k(t-t_0)}]$ with $t_0 = 2026$ and R_0 the 2026 value: growth that decays as the ceiling is approached.

Plateau / Arms race / Rationalize / Adaptive The forward capex paths: flat at the 2026 level of $780B; the 2027 trajectory continued at $1.0–1.1T (an *arms race*: each operator building because the others are); a 35% cut to $500–550B; and an adaptive path in which capex tracks realized receipts (Appendix B).

Ramp (k_s) In units of per year. The rate parameter of the logistic curve; a sector covers half the remaining distance to its ceiling in about $\ln 2/k_s$ years (0.9 years at $k = 0.8$). It is not a growth rate and not "$1 + k$".

Residual adoption/capability factor Dimensionless multiplier on 2030 receipts (1.0 = the sector chains as estimated). It stands for what the chains cannot see from 2026: the pilots and seat counts visible today let one see roughly four years ahead, but not whether a capability step makes agents trustworthy with whole workflows. Because it cannot be estimated, it is swept as a what-if axis rather than assigned a range.

Shell Buildings, power distribution, cooling plant — the long-lived (15–25 yr) part of a data center.

Silicon share (ϕ) Fraction of AI-attributable capex that is accelerators, memory, networking and servers, as opposed to shell, power and cooling.

Site cost uplift (κ_{site}) Multiplier on shell cost for community-benefit agreements, water mitigation, dry cooling, private generation, relocation.

Siting / consent deferral (f_{delay}) Share of a cohort delayed a year by permitting, litigation, moratoria or relocation.

Slack trap The paper's term for productivity gains absorbed as organizational slack (verification, output inflation, fractional time savings) rather than realized as cash flow.

Sovereignty overlay (κ_{sov}, γ_{sov}) Capital duplication multiplier and demand carve-out from data-residency and procurement rules.

Top-down vs bottom-up Two independent demand estimates: a base grown at g; and fifteen sector chains summed. They share only the 2026 base.

Model variables and parameters

Every quantity the model uses, alphabetical by symbol within each group (Greek letters by their names: ϕ under p, θ under t), with its symbol as it appears in the text, its name in the register (`parameters.json`), its units, its base-case range (triangular min / mode / max unless stated) and what it means. Ranges are those of the current version; the register is authoritative.

Symbol	Register name	Units	Base range	Meaning
Supply side — the installed base and its carry				
A_{2023}	ai_capex_2023	$B	20 / 30 / 40	AI purchases in 2023; with the flat 2023 total, pins the non-AI baseline $N_{2023} = 161 - A_{2023}$
A_c	— (derived)	$B/yr	—	AI-attributable capex: $\max(I_c - N_c, 0)$

c_{opex}	opex_share	1/yr	0.059 / 0.0665 / 0.074	Facility opex per year as a fraction of in-service gross stock (power, staff, tax, network, other)
ℓ_{si}, ℓ_{sh}	lag_silicon, lag_shell	0–1	0.5/0.7/0.9; 0.2/0.4/0.6	Fraction of a cohort's silicon (shell) energized in its spend year; remainder the year after
f_{delay}	siting_deferral	0–1	0.10 / 0.20 / 0.35	Share of each cohort from 2026 deferred a year by consent, siting, water
f_{tr}	training_share	0–1	0.35 / 0.45 / 0.55	Share of the silicon fleet in training clusters (rest inference)
$G_{c,j}$	— (derived)	$B	—	In-service gross of cohort c, component $j \in \{\text{si}, \text{sh}\}$
g_N	nonai_growth	1/yr	0.02 / 0.06 / 0.10	Growth of the non-AI baseline (fulfillment, ordinary cloud refresh)
grid cap	grid_cap	$B/yr	1150 / 1400 / 1680	Energizable AI capex per year (22–40 GW at $38–55M/MW); excess deferred a year
H_t	— (output)	$B/yr	∼725 in 2030 (plateau)	Carry: depreciation + opex + return on net book + return on deferred capital, Eq. 2
I_c	capex_history	$B/yr	161, 260, 448, 780 (2023–26); paths after	Big-5 capital expenditure in cohort year c (cash PP&E plus new finance leases)
κ_{site}	site_cost_uplift	multiplier	1.02 / 1.05 / 1.09	Shell cost uplift for community benefits, water mitigation, relocation
κ_{sov}	(overlay)	multiplier	1.1 / 1.2 / 1.3	Capital duplication from data-residency rules; sovereignty scenario only
L_{inf}	life_inference	years	4 / 5 / 6	Economic life of inference-fleet silicon
L_{sh}	life_shell	years	15 / 20 / 25	Life of buildings, power distribution, cooling plant
L_{si}	— (derived)	years	∼4.2	Effective silicon life, harmonic mean: $1/(f_{\text{tr}}/L_{\text{tr}} + (1-f_{\text{tr}})/L_{\text{inf}})$
L_{tr}	life_training	years	2.5 / 3.5 / 4.5	Economic life of training-cluster silicon (power-slot obsolescence)
N_c	— (derived)	$B/yr	∼156 in 2026	Non-AI baseline in year c: $N_{2023}(1+g_N)^{c-2023}$
ϕ	silicon_share	0–1	0.45 / 0.52 / 0.60	Share of A_c that is accelerators, memory, networking, servers (rest is shell)
π	inflation	1/yr	0.020 / 0.026 / 0.037	Inflation for stating returns and deficits in today's money; not applied to receipts or to the payback test (no double count)
r	wacc	1/yr	0.090 / 0.0945 / 0.099	Weighted average cost of capital (CAPM); return charged on net book value
u	cooling_opex_uplift	0–1	0 / 0.03 / 0.06	Opex uplift where evaporative cooling is refused (dry cooling)

Symbol	Register name	Units	Base range	Meaning
Demand side — end-customer revenue and infrastructure receipts				
C_s	sectors (table)	$B	per sector	Sector s's 2030 ceiling, from a physical or budgetary constraint
D_{2026}, D_{t_0}	base_2026	$B	161 / 179 / 198	Calendar-2026 end-customer AI revenue, all channels (seven components)
D_t^{BU}	— (output)	$B/yr	∼626 in 2030	Bottom-up end-customer revenue, $\sum_s R_s(t)$

F_{circ}	circular	\$B/yr	8 / 12 / 18	Round-trip revenue (equity returning as cloud spend), subtracted from receipts
g	(swept)	1/yr	0.2–0.8	Sustained growth of end-customer revenue in the top-down sweep
g^*	— (output)	1/yr	0.49 (plateau, 2030)	Break-even sustained growth: receipts = carry in the target year
g_C	post2030_ceiling_grc	1/yr	0.06 / 0.10 / 0.14	Growth of sector ceilings after 2030 (Appendix B)
g_{EU}	eu_displacement	0–1 by 2030	0.03 / 0.05 / 0.08	European displacement of US vendors, ramped 2027–30 on sovereign-exposed sectors
γ_{sov}	(overlay)	0–1	0.15 / 0.25 / 0.35	Demand carve-out for domestic champions and enclaves; sovereignty scenario only
k_s	sectors (table)	1/yr	per sector	Sector s's logistic ramp rate; half the remaining distance in $\ln 2/k_s$ years
M_C, M_k	common_factor_ceili_ramp	multiplier	0.7/1.0/1.4; 0.7/1.0/1.3	Common factors on all ceilings (ramps), drawn once per trial
$R_{s,0}$, $R_s(t)$	sectors (table)	\$B	per sector	Sector s's 2026 revenue; its revenue in year t on the logistic
Receipts_t	— (output)	\$B/yr	∼479 in 2030	Infrastructure receipts, $\sum_s \theta_s R_s(t)$
residual factor	(swept)	multiplier	0.6–1.7	Multiplier on 2030 receipts for adoption the sector chains cannot see (secondary variable)
Δ_t	— (output)	\$B/yr	~ -259 in 2030	$\text{Receipts}_t - F_{\text{circ}} - \kappa H_t$: annual surplus (deficit)
θ	theta	0–1	0.77 / 0.815 / 0.86	Revenue-weighted cloud-capture share, top-down
θ_{lab}	— (component of θ)	0–1	∼0.635	Labs' compute cost as a share of their revenue, by lab
θ_s	sectors (table)	0–1	per sector	Cloud-capture share of sector s: fraction of its end-customer revenue reaching infrastructure owners
z	— (output)	—	~ -3.5	$\text{median}(\Delta_{2030})/\sigma_\Delta$

Symbol	Register name	Units	Base range	Meaning
Feasibility band — what enterprise, advertising and consumer budgets can finance				
ads cap, cons cap	(fixed ranges)	\$B	140/170/200; 80/105/130	Advertising and consumer ceilings entering the band
ainew	(fixed range)	0–1	0.02 / 0.04 / 0.07	Genuinely new AI spend as a share of the pool
cutoff	— (output)	\$B	920–1310 (P10–P90)	Total 2030 AI revenue financeable: pool × (realloc + ainew) + ads + cons
disp	eu_pool_displacemer	0–1	0.10 / 0.20 / 0.35	Share of Europe's pool (∼23% of global) moved away from US vendors by 2030
g_{infra}, g_{sv}	(fixed ranges)	1/yr	0.04/0.08/0.12; -0.02/0.03/0.07	Growth of infrastructure software; of IT services
g_{seat}	seat_saas_growth	1/yr	-0.06 / 0 / 0.05	Growth of seat-priced software 2026–30 (secondary variable)
realloc	reallocation_to_ai	0–1	0.12 / 0.20 / 0.32	Share of the accessible pool reallocated from seats and services to AI solutions (secondary variable)

seat share	seat_share_of_softwa	0–1	0.50 / 0.55 / 0.60	Share of software that is seat-priced application SaaS
SW_{26}, SV_{26}	software_2026, services_2026	$B	1380/1440/1500 1800/1870/1940	Gartner 2026 enterprise software and IT services pools

Symbol	Register name	Units	Base range	Meaning
Incumbent worked case (Microsoft 365 commercial)				
agent seat change	(fixed range)	1/yr	-0.06 / -0.03 / 0	Seat change from agents replacing human seats
attach	copilot_paid_seats_M (base)	0–1	0.12 / 0.22 / 0.35 by 2030	Paid Copilot attach on remaining seats (∼6.5% today)
ϵ	seat_elasticity	—	0.15 / 0.35 / 0.60	Seats lost per unit of cumulative price increase (secondary variable)
EU exit	(fixed range)	0–1 by 2030	0.03 / 0.08 / 0.15	Cumulative sovereignty seat loss
p	price_growth	1/yr	0.05 / 0.08 / 0.12	List-price growth including the July-2026 increase
seats_{26}, ARPU_{26}	seats_2026_M, arpu_2026	M; $/seat/mo	420/450/480; 19/21/23	Paid commercial seats and blended price, 2026[v]

Symbol	Register name	Units	Base range	Meaning
Water and thermal (used in text, not in the carry)				
E_a, k, AF	—	eV; eV/K; —	$E_a \approx 0.7$	Activation energy, Boltzmann constant, Arrhenius acceleration factor
evaporative share	—	0–1	0.4 / 0.6 / 0.8	Share of the fleet on evaporative cooling
WUE	—	L/kWh	0.3 / 1.0 / 1.8	Water consumed per kWh of IT energy

Symbols used in the derivations (not model inputs)

$\mathbf{1}[\cdot]$ Indicator: 1 if the bracketed condition holds (the cohort is still alive), 0 otherwise.

AF, E_a, k, T_1, T_2 Arrhenius acceleration factor between absolute temperatures T_1 and T_2; activation energy (≈0.7 eV); Boltzmann's constant (8.617×10^{-5} eV/K). Note k here is not the logistic ramp k_s.

B_{realized}, $C_{\text{severance}}$ Cash benefit a firm can actually book, $W\tau(1-\sigma_{\text{slack}})(1-\nu_{\text{verify}}) - C_{\text{severance}}$; one-time separation costs.

B_{req}, S_{ent}, H_{ent} Benefit enterprises must realize (∼$1.1T in 2028); their total AI outlay including integration (∼$0.95T); the enterprise share of the carry (∼$375B).

ℓ **vs** L Lower-case ℓ (with subscript si or sh) is an energization lag, a fraction between 0 and 1; upper-case L is a life in years. Different letters for different quantities.

ϵ, p **(incumbent case)** Seat-loss elasticity and annual price growth; revenue ratio $(1+p)^4[1-\epsilon((1+p)^4-1)]$ times the seat trend.

g **subscripts** g_N baseline growth; g_C post-2030 ceiling growth; g_{EU} European displacement; g_{seat}, g_{infra}, g_{sv} growth of the three budget pools; g^* break-even growth; bare g the top-down sweep. All per year.

j, L_j, $G_{c,j}$ Component index in the carry equation: j = si (silicon) or sh (shell); the life and in-service gross of that component of cohort c.

J, n **(Black's equation)** Current density and its exponent (typically ∼2) in electromigration lifetime, MTTF $\propto J^{-n}e^{E_a/kT}$.

κ **(unsubscripted)** In $\Delta_t = \text{Receipts}_t - F_{\text{circ}} - \kappa H_t$: the sovereignty multiplier applied to carry, 1 in the base case.

μ_{integ}, m Integration spend per dollar of software and tokens (Triang 1.0 / 1.5 / 2.5); the required benefit margin over cost (≈0.2).

ν_{verify} Share of the remainder consumed by human verification and liability review (≈0.20).

$\omega(e)$ Dollars flowing along edge e of the circular-flow graph; the revenue a cycle can round-trip is the smallest ω on it.

P10, P50, P90 Percentiles: the value below which 10%, 50% (median), 90% of Monte Carlo outcomes fall.

ρ, ρ_{real} A return in dollars of each year (nominal), and the same return in today's money: $\rho_{\text{real}} = (1+\rho)/(1+\pi) - 1$ (Appendix F). Not to be confused with r, the cost of capital.

σ_{slack} Share of nominal saving absorbed as organizational slack (≈0.65): fractional time, output inflation, the manager's dilemma.

$\sigma_{\ln X}$, $\sigma_{\ln Y}$, $\sigma_{\ln D}$, $\sigma_{\ln R_s}$ Relative (log) standard deviations of a factor, a chain, the demand total and a sector; see $\sigma_{\ln}$ under Statistics and estimation, below.

t_0, t, c The base year (2026); the year being evaluated; a cohort (capex) year.

τ Nominal task-level time saving from AI as a fraction of payroll (Triang 0.10 / 0.15 / 0.25), Section 10.

W The payroll pool the saving applies to: ∼$30T global knowledge-worker compensation, ∼$9T US.

w_s Sector s's share of total end-customer revenue, R_s/D; the weight (squared) in the sum rule of Appendix D.

Y, X_i, n In the method section: a Fermi chain $Y = \prod_{i=1}^{n} X_i$ of n factors X_i.

Statistics and estimation

CAGR Compound annual growth rate.

Gross vs net basis Whether money a reseller collects and forwards to a supplier is counted as the reseller's revenue (gross) or only the reseller's margin (net). It applies to any reseller relationship; the case that matters here is that Anthropic books end-customer spend on Amazon Bedrock and Google Vertex as its own gross revenue, so the same dollar can appear in both a lab's and a hyperscaler's AI figures. The paper subtracts an overlap for this.

Half-swing Take one input; set every other input to its mode; move the chosen input from its minimum to its maximum and record how much the result changes. Half of that change is the half-swing. Min-to-max (not mode-to-max) is used because the triangular ranges are not symmetric, and halving makes it comparable to a standard deviation. Summed in quadrature, the half-swings reproduce the Monte Carlo spread (Appendix D).

Harmonic mean The right average for asset lives, because depreciation is $1/L$ per year: a fleet that is 45% training silicon (f_{tr}) at 3.5 years and 55% inference silicon at 5 years depreciates at $0.45/3.5 + 0.55/5 = 0.239$ per year, i.e. an effective life of $1/0.239 = 4.2$ years — not the arithmetic 4.3. The shorter-lived part dominates.

Monte Carlo (MC) Repeating a calculation $N = 100{,}000$ times with inputs drawn from their distributions, to obtain the distribution of the result.

P10 / P90 The 10th and 90th percentiles of a distribution: the range inside which 80% of Monte Carlo outcomes fall.

Quadrature / root-sum-square (RSS) Combining independent uncertainties as $\sqrt{\sum \sigma_i^2}$ rather than $\sum \sigma_i$. Two independent errors of 10 combine to 14, not 20. In the variance budget the same rule is applied to the half-swings, which play the role of the σ_i.

Run-rate vs booked Run-rate (ARR) is the latest month or quarter annualized; booked is what was recognized over the calendar year. In a fast-growing business the two differ: a company at $20B run-rate in January and $40B in December booked roughly the average, $30B, if growth was linear — less if it accelerated late. Reported run-rates are converted to calendar bookings this way throughout.

$\sigma_{\ln}$ Standard deviation of the natural log of a quantity; approximately its relative (percentage) uncertainty.

Tornado chart Horizontal bars of half-swings, largest at top, showing sensitivity to each input.

Triang(a, b, c) A triangular probability distribution with minimum a, most likely value b, maximum c: zero probability outside $[a, c]$, peaking at b. Used for every input because it needs only three numbers an expert can defend. Its relative uncertainty, $\sigma_{\ln}$, is approximately $\ln(c/a)/4.9$: the full log-range divided by about 4.9, because a triangle's standard deviation is roughly a fifth of its base (exactly $1/\sqrt{24}$ of the base for a symmetric triangle).

Variance budget Apportionment of total uncertainty among inputs by squared half-swing; shows which inputs matter.

z-score The median gap between receipts and carry (Δ), divided by the standard deviation of that gap: $z = \Delta/\sigma_\Delta$. A z of -3.5 means the median deficit is 3.5 standard deviations below

zero. A z-score of 2 or more in size, $|z| \geq 2$, is the paper's threshold for a robust sign; it is a statement about the modeled distribution, not a guarantee.

Finance and accounting

Apple, Qualcomm, AMD, Intel (edge silicon) Makers of the NPUs in phones and PCs (Apple Silicon, Snapdragon X, Ryzen AI, Core Ultra) that run routine inference locally.

ARPU Average revenue per user (or per seat), in $ per month or per year; for Microsoft 365 commercial, the blended price across E3, E5 and Business plans (∼$21/seat/month, unverified).

ARR Annual recurring revenue (see run-rate).

ASC 360-10 The US accounting standard (FASB Codification) governing impairment of long-lived assets: if projected undiscounted cash flows fall below carrying value, the asset is written down to fair value.

Beta A stock's sensitivity to the market; >1 means more volatile than the market.

Capex Capital expenditure: cash spent on long-lived assets, here including new finance leases.

CAPM Capital asset pricing model. Cost of equity $= r_f + \beta \times$ ERP: the risk-free rate plus the stock's beta times the equity risk premium. With $r_f = 4.3\%$, $\beta = 1.2$ and ERP $= 5\%$, cost of equity is $4.3 + 1.2 \times 5 = 10.3\%$; blended with cheaper debt it gives the WACC.

COGS Cost of goods sold; direct costs of delivering a product.

CSP Cloud service provider: Amazon Web Services, Microsoft Azure, Google Cloud.

Depreciation The annual write-down of an asset's cost over its useful life. *Accounting life* is the company's book assumption (5–6 yr for servers); *economic life* is how long the asset actually earns its keep.

DINUM France's interministerial digital directorate, which mandated the government Windows-to-Linux migration in April 2026.

DOI Digital object identifier: the permanent citable identifier Zenodo issues for a deposit.

DSCR Debt-service coverage ratio: cash flow available divided by debt payments due; lenders set tripwires on it.

EBIT Earnings before interest and tax: operating profit.

Equity risk premium The excess return investors demand over the risk-free rate for holding equities. (Not to be confused with ERP, enterprise resource planning software, which also appears.)

FASB Financial Accounting Standards Board, the US accounting standard-setter.

Gross margin Revenue less COGS, as a share of revenue.

Hurdle rate The minimum IRR a company requires before approving an investment. Every business applies one to all spending; it is set above the WACC, and higher again for projects whose payback is uncertain — so AI projects face a higher hurdle than routine capital, not a lower one.

IDC International Data Corporation, the other large IT-market forecaster; a cross-check on Gartner.

IRR Internal rate of return. Future cash is worth less than present cash; a *discount rate* d converts a cash flow F_t in year t to its present value $F_t/(1+d)^t$. The IRR is the d at which a project's discounted inflows exactly repay its outlay, $\sum_t F_t/(1+d)^t = 0$: the annual return the project earns on the money tied up in it.

JPMorgan; Bank of America Investment banks whose 2026 software-sector notes are cited on the SaaS repricing.

M365 Microsoft 365, the commercial Office suite subscription; the largest seat-priced software base.

MAU Monthly active users: anyone who used the product at least once in the month. The distribution of use behind that count is extremely skewed — a small fraction of heavy daily users, a long tail of occasional ones — which is why the consumer ceiling multiplies MAU by a paid-conversion rate (4–8%) rather than treating users as alike.

MIT NANDA The MIT initiative whose 2025 report found ∼95% of enterprise generative-AI pilots without measurable P&L impact.

Net book value Cost less accumulated depreciation; the base on which a return is charged.

Nominal vs real Nominal amounts and returns are in dollars of each year; real ones are in today's dollars, after inflation. Real return $= (1 + \text{nominal})/(1+\pi) - 1$. The paper's cost of money (9.45%) is nominal, so inflation is already inside the payback test; real figures are shown only for the returns investors keep.

NOPAT Net operating profit after tax: operating profit (EBIT) less tax at the statutory rate; the numerator of Goldman Sachs's ROIC definition in Section 16.

OCI Oracle Cloud Infrastructure.

Opex Operating expenditure. Here *facility opex*: power, cooling, on-site staff and maintenance, property tax, insurance, network — everything it costs to run the building each year other than depreciation and financing.

PP&E Property, plant and equipment.

ROI / ROIC Return on investment / on invested capital.

ROU asset Right-of-use asset: a leased asset recognized on the balance sheet.

RPO Remaining performance obligations: contracted revenue not yet delivered (a backlog).

SEC; 10-K, 10-Q, 8-K, S-1 US Securities and Exchange Commission; its annual report, quarterly report, current-event report, and registration statement for an IPO.

SK Hynix, Samsung, Micron The three HBM suppliers; the bullwhip risk sits with their 2027–28 capacity.

SPV Special-purpose vehicle: a separate legal entity used to hold assets and debt off a parent's balance sheet. SPVs change who carries the carry and where it appears, not its size; they matter to the paper only because their debt-service tripwires can turn a slow revenue shortfall into a fast liquidation.

TAM Total addressable market.

TCO Total cost of ownership over an asset's life.

VC Venture capital.

WACC Weighted average cost of capital: the blended annual return a company must earn on invested capital to satisfy its shareholders and lenders. The paper's r. It is a property of the company, not of the project, so the same r applies to AI and non-AI assets; the extra risk of AI is handled through the hurdle rate on the customer side, not the WACC.

XBRL The machine-readable tagging of SEC filings, from which Epoch AI's capex series is built.

YTD; FY; Q1–Q4; YoY; QoQ Year to date; fiscal year; quarters; year-on-year; quarter-on-quarter. Nvidia's and Microsoft's fiscal years do not align with the calendar.

Computing and hardware

A100; H100; B200 Successive Nvidia data-center accelerator generations (2020, 2022, 2024–25).

Agentic; agents AI systems that execute multi-step tasks and take actions, rather than single responses.

API Application programming interface; here, metered access to a model over the network.

AWS; GCP; OCI; Azure Amazon Web Services, Google Cloud Platform, Oracle Cloud Infrastructure, Microsoft's cloud.

Bedrock; Vertex; Azure AI Foundry The AI platform services of AWS, Google Cloud and Microsoft Azure through which third-party models are resold.

Copilot (Microsoft 365 Copilot; GitHub Copilot) Microsoft's branded assistants for Office and for coding. Their disclosed paid seat counts anchor the office-assistant sector's 2026 base.

CPU Central processing unit; conventional server silicon.

Distilled / quantized model A smaller model trained to mimic a larger one; a model stored at lower numeric precision. Both cut compute cost.

Edge Computing on the user's own device — a phone or PC with an NPU. *Not* the same as on-premise.

FP4 / FP8 / FP16 Floating-point number formats of 4, 8 and 16 bits; lower precision means more throughput per watt.

Frontier lab A developer of leading models (OpenAI, Anthropic, xAI, Mistral, DeepSeek).

GPT-4 OpenAI's March 2023 model; used here as the date from which AI capex is measured.

GPU Graphics processing unit; the general term for the accelerators (Nvidia H100, B200) that train and run AI models.

HBM (HBM3, HBM3e, HBM4) High-bandwidth memory: DRAM stacked vertically next to the accelerator die; successive generations.

Hyperscaler A cloud operator building at multi-gigawatt scale (the Big-5 and their global peers).

Inference vs training Running a trained model to answer requests, versus the compute-intensive process of creating it.

InfiniBand; RoCE High-speed cluster networking fabrics.

LLM; SLM Large / small language model.

Microscaling (MX formats) A block floating-point scheme, standardized by the Open Compute Project in 2023, in which a group of 32 values shares one scale factor so that each value needs only 4 bits. It is what makes FP4 accurate enough for inference; expected to spread fastest where accelerators are scarce, including China.

MLOps Machine-learning operations: the engineering discipline of deploying and maintaining models in production.

Neo-cloud A GPU-rental specialist without a broad software business (CoreWeave and peers).

NPU Neural processing unit: an AI accelerator built into consumer devices (phones, PCs).

Office assistant / agent The paper's generic term for AI assistants embedded in productivity suites and enterprise workflows (Microsoft 365 Copilot, Google Gemini for Workspace, Claude and ChatGPT enterprise seats, and the agentic workloads built on them). Lower-case "copilot" has become industry shorthand for this category; the paper avoids it to keep the category distinct from the product.

On-premise Computing on servers the customer owns and operates in its own facilities, typically running open-weight models. Edge and on-premise both bypass the cloud meter; the paper's θ_s nets out both.

Open-weight model A model whose parameters are published for anyone to run (Llama, Mistral, DeepSeek).

RAG Retrieval-augmented generation: a model answering with reference to documents fetched at query time.

Ternary weights Model weights restricted to $\{-1, 0, 1\}$, eliminating multiplications.

Token The unit of text a model reads or writes (roughly 3/4 of a word); the unit in which inference is priced.

TOPS Tera-operations per second; the throughput rating of an NPU.

TPU; Trainium; MTIA Google's, Amazon's and Meta's in-house AI accelerators.

TSV Through-silicon via: the vertical copper interconnect through stacked memory dies.

Data centers, power and reliability

Activation energy (E_a); Boltzmann constant (k) The energy barrier of a failure mechanism; the constant relating temperature to energy.

Arrhenius relation Failure rate rising exponentially with temperature: $AF = \exp[(E_a/k)(1/T_1 - 1/T_2)]$. With activation energy $E_a \approx 0.7$ eV this gives roughly a doubling per 10°C.

ASHRAE TC 9.9 The technical committee that sets recommended data-center temperature and humidity envelopes.

Black's equation Electromigration lifetime $\propto J^{-n}e^{E_a/kT}$: metal lines fail faster at high current density and temperature.

Coffin–Manson Fatigue life under thermal cycling; governs solder and micro-bump failure in stacked memory.

EIA US Energy Information Administration.

EirGrid; CRU; TenneT; Liander Ireland's transmission operator and regulator; the Dutch transmission and distribution operators.

ETS The EU Emissions Trading System, which prices carbon at ∼EUR 70/t. The US has no federal carbon price; California's cap-and-trade and the northeastern RGGI cover a minority of data-center load.

Evaporative vs dry cooling Cooling by evaporating water (cheap, water-intensive) versus by air-cooled heat exchangers (no water, more power).

FLAPD Frankfurt, London, Amsterdam, Paris, Dublin: Europe's five main data-center hubs.

Interconnection queue The waiting list to connect a new load or generator to the transmission grid. Its length differs by geography: 5–7 years in PJM and similar US regions, comparable or longer in Ireland, the Netherlands and Germany, and effectively a planning allocation rather than a queue in China.

JEDEC The semiconductor standards body; JEP122 is its failure-mechanism reference.

Moratorium A formal halt on new connections or approvals.

MTTF Mean time to failure.

MW; GW; TWh; kWh Megawatt, gigawatt (power); terawatt-hour, kilowatt-hour (energy). Data-center scale is quoted as IT load in MW or GW.

PJM; ERCOT; CAISO The grid operators for the mid-Atlantic, Texas and California.

PUE Power usage effectiveness: total facility power divided by IT power; 1.2 means 20% overhead for cooling and distribution.

Salvage / second life Reusing retired accelerators for less demanding work; the paper argues the power slot, not the silicon, is the binding constraint.

WUE Water usage effectiveness: litres of water consumed per kWh of IT energy.

Economics, policy and institutions

BLS OES / ECEC The Bureau of Labor Statistics' occupational employment and wage survey, and its employer-cost-of-compensation series.

CFO; CX; POC Chief financial officer; customer experience (contact centers); proof of concept.

Data Center Watch A research firm that tracks data-center projects blocked or delayed by local opposition; source of the siting-deferral calibration.

Digital sovereignty Policies requiring data and compute to remain under national jurisdiction.

DPI Digital public infrastructure (India's state-run digital platforms).

East Data, West Computing China's program to site compute in its western, low-cost-power provinces.

Epoch AI A nonprofit research group that maintains open datasets on AI compute, spending and revenue; its capex series, built from SEC XBRL filings, is the paper's capex history, and its revenue-reports dataset anchors the lab figures.

Gain-share Pricing as a share of the customer's realized savings.

Gartner The largest IT-market research and forecasting firm; source of the IT-spending and AI-share figures.

GCC; G20 Gulf Cooperation Council states; the Group of Twenty economies.

GDPR; EU AI Act; BSI C5; DPDP EU data-protection regulation and its Chapter V transfer rules; the EU's 2024 AI regulation; Germany's cloud security catalogue; India's 2023 Digital Personal Data Protection Act.

IT budget / IT spend Enterprise spending on software, services, devices and data-center systems, as tracked by Gartner.

Jevons paradox; Parkinson's law Efficiency gains increase total consumption; work expands to fill the time available. Combined here as *Parkinson–Jevons*: cheaper output inflates the demand for output.

Knowledge worker Office, professional, technical and managerial labor; the paper's ∼1.05B global and 62M US pools.

NHTSA; HIPAA; FINRA; SEC; SR 11-7 US vehicle-safety regulator; health-privacy law; securities self-regulator; securities regulator; the Federal Reserve's model-risk-management guidance.

OECD; IFR; ILO; BLS; NEA The OECD; International Federation of Robotics; International Labour Organization; US Bureau of Labor Statistics; China's National Energy Administration.

Productivity J-curve The pattern (Brynjolfsson et al.) in which a general-purpose technology first depresses measured productivity, because of intangible complementary investment, then raises it.

Seat A per-user software license.

Solow paradox "You can see the computer age everywhere but in the productivity statistics."

Surplus capture (Nordhaus) Innovators historically kept about 2% of the social surplus from their innovations.

TFP Total factor productivity: output growth not explained by more labor or capital.

Phrases and idioms used in the paper

Active share (of paid seats) The fraction of paid assistant seats actually used weekly; independent estimates 20–30% in some large deployments, Microsoft claims parity with Outlook and Teams. Triang(0.25, 0.45, 0.70), a secondary variable; separates a bundle from a product.

AI tax Trade-press term for bundling AI features into existing subscriptions at a higher price whether or not the customer wanted them.

Allocation vs throughput utilization Allocation: the share of a fleet rented out (Oracle reports 97.9%). Throughput: the share of a rented accelerator's capacity doing paid work (40–50%). Different quantities; the batch argument concerns the second.

Amortization overhang; impairment wave Depreciation obligations from past cohorts that current revenue cannot cover; the resulting write-downs when ASC 360-10 tests fail.

Arrhenius budget The total high-temperature operating time a part can accumulate before wear-out; consumed faster at higher temperature.

Attach rate The fraction of a vendor's existing seats that also buy a paid add-on (here, Copilot on Microsoft 365). About 6.5% in mid-2026 (30M paid Copilot seats on ∼460M commercial seats).

Avoided hiring; attrition Cash-flow benefit realized by not replacing departures, rather than by dismissals; slower but real.

Base-load inference Routine, high-volume model usage (summaries, drafting, classification) that fills capacity between peaks.

Batch share (b) Share of inference tokens processed asynchronously in batch windows (24 h) at 50–75% discounts, as opposed to interactively. Raises utilization, lowers effective price; a secondary variable.

Bridging Temporary funding that covers a gap until revenue arrives; here, the investor-funded share of lab compute.

Bull case / bear case The optimistic and pessimistic readings of the same evidence; the paper tries to state each in its strongest form.

Bullwhip Over-ordering up a supply chain in response to demand signals, followed by oversupply; applied here to HBM.

Cash drag; stranded capital Capital committed to sites that cannot be energized or built, carrying cost without revenue.

CLOUD Act The 2018 US law under which US providers must produce data held anywhere in the world on a US order; the legal basis of Europe's sovereignty exit from US cloud and software.

Cloud meter Metered, pay-per-token or per-hour cloud billing; the channel through which infrastructure earns.

Coin-toss neighborhood The region of parameter space where P(profit) is near 50%: the sign of the result is not determined.

Commodity floor The price to which a commodity converges when supply is ample: its marginal cash cost. Receipts at the floor cover opex and nothing else.

Community-benefit agreement Payments or commitments a developer makes to a locality to obtain approval.

Competing with one's own ghost Selling retired hardware into a secondary market that then undercuts the seller's new hardware.

Consent bottleneck Local political permission as the binding constraint on siting (Forbes' phrase).

Cost curve / supply stack Producers ranked by full cost per unit, with capacity on the horizontal axis — the standard commodity picture; the price settles where demand meets the curve, and producers above it lose their carry.

De-racked Physically removed from the data center.

Deflationary wedge Open-weight models driving API prices toward the marginal cost of electricity.

Dual-use fallacy The assumption that AI halls can be repurposed for conventional hosting; their density and cooling make that uneconomic.

Earn its carry For the installed base to generate receipts at least equal to its annual carry (depreciation, opex, return). The paper's test of solvency.

Economic depreciation (δ) The fall in what an installed accelerator can earn, driven by the newest chip's lower cost per token; modeled as a declining balance at 50–90%/yr, versus straight-line accounting at 20–30%/yr. A secondary variable.

Electricity floor The lowest sustainable price of inference: the power to run it.

Energizable capex The dollar value of capacity the grid can connect in a year.

EuroStack The European initiative for a sovereign digital stack — cloud, operating systems, productivity software — independent of US vendors.

Fermi-robust A conclusion whose gap exceeds the propagated uncertainty ($|z| \geq 2$), so it survives ordinary disputes about individual inputs.

Fortress West The scenario label for a Western bloc with strong sovereignty rules and restricted flows.

Frontier vs routine Bleeding-edge reasoning (a small share of volume) versus everyday tasks (the large majority) that small models handle.

GPU rental price Market price to rent an accelerator by the hour (Silicon Data index); H100 $2.63/hr in Sept. 2026. Rising rentals signal scarcity; the ratio of rental to marginal cash cost ($0.20–0.35/hr) is the GPU-level version of the price-to-floor ratio.

Hard cap / cutoff A ceiling set by something that cannot be exceeded (a seat count, an IT budget share, physics), as opposed to a soft estimate.

Hashprice Bitcoin mining's revenue per unit of computation; converged to the marginal cost of the cheapest power within two years of each ASIC generation — the precedent for inference pricing.

Indivisibility (of labor) Fractional time savings across many people cannot be aggregated into a whole position eliminated.

Inference utilization Share of nominal accelerator throughput actually used for paid inference (40–50% today; latency and peak buffers take the rest).

Interim marker A 2027 checkpoint on the path to the 2028 revenue test.

Investor-funded compute Cloud purchases by frontier labs paid for with venture and strategic capital rather than customer revenue; real receipts to hyperscalers, but not self-sustaining.

Local-silicon siphon; edge siphon Routine inference migrating to NPUs in phones and PCs, where it is not billed to any cloud.

Manager's dilemma Managers' incentive to report "bandwidth expansion" rather than surrender headcount.

Marginal cash cost of inference Cash cost of producing one more token: power and facility opex per accelerator-hour divided by tokens per hour; excludes depreciation and return. ∼$0.03–0.05 per million tokens.

Move the estimate vs tighten it Decomposition can shift the central value (a move) as well as narrow its range (a tightening); the paper records both.

Observables Public, verifiable numbers the model must reconcile with (Table 4).

One-at-a-time Moving a single input across its range with all others held at their modes; the basis of the tornado charts and variance budget.

Operational ramp The share of built capacity that is in service in a given year (Goldman Sachs: 60/80/85% in 2028–30); the paper's energization lag plays the same role. Distinct from inference utilization, which is how hard in-service capacity is run.

Outcome-priced; seat-priced; billable-unit collapse Pricing on results; pricing per user; the erosion of per-seat and per-hour revenue models as outcomes become purchasable.

Pass-through; gross basis Revenue a reseller collects and forwards to the supplier; counting it as the supplier's own revenue (gross) creates double counts across companies.

Phase 2 (Goldman Sachs) The 2026–27 AI-compute capex cohort of six US hyperscalers isolated in Goldman Sachs's September 2026 ROIC framework (Section 16); the paper's cohorts $c = 2026, 2027$.

Price elasticity of seats (ϵ) Seats lost per unit of cumulative price increase; 0.35 means a 20% cumulative rise loses 7% of seats.

Provisional; [v / [VERIFY]] A figure marked for checking against its primary source before publication.

Ratepayer backlash Public opposition driven by electricity bills rising with data-center load.

Recoverability test The ASC 360-10 step comparing an asset's carrying value with the undiscounted cash flows management projects for it.

Referee An anonymous academic reviewer; "what a referee would attack first" means the weakest point a hostile expert reader would find.

Replacement vs growth capex Spending that merely replaces retired capacity versus spending that adds capacity; at short silicon lives, a flat budget is increasingly replacement.

Round trip; circular flow; closed loop Revenue that a company's own investment returns to it, e.g. equity in a lab that comes back as cloud spend.

SaaSpocalypse Wall Street's name for the January–April 2026 repricing of enterprise software, ∼$2T of market value, on the recognition that AI agents replace the human seats per-seat software is priced on.

Salvage fallacy; second-life fallacy The assumption that retired accelerators keep meaningful value; the paper argues they do not, for power, pricing and thermal reasons.

Secondary variable An input too loose to pin from current data and too consequential to bury: held at a central range in the base case and swept explicitly in its own figure, so the reader sees what the result does across it. In this paper: the residual adoption factor, the assistant ceiling, the reallocation share, and seat-software growth.

Slack trap; slack absorption Productivity gains absorbed into organizational slack rather than cash flow (see Section 10).

Sovereign carve-out; domestic champion Demand reserved by governments for national providers (Mistral, Falcon, Bhashini) or air-gapped enclaves.

Sunk deficit The 2027–28 shortfall that no growth rate can close, because the cohorts causing it are already on the books.

Take-or-pay A power contract under which the buyer pays for the contracted energy whether or not it is used; converts power from a variable operating cost into a fixed charge (Section 16.4).

Talent trap The cost and failure rate of building AI capability in-house, which pushes enterprises to external operators.

The build-out The 2023–2030 wave of AI data-center construction by the Big-5 and their peers.

The scissors Figure 12: carry rising on one blade, receipts on the other; where and whether they cross.

Timing chasm The mismatch between 8–12 year enterprise adoption cycles and 3–5 year silicon lives.

Toward the bull / toward the bear The direction a revision moved the result: in favor of the build-out paying, or against.

Tri-bloc The US, Europe and China as three diverging compute regimes.

Unrecognized impairment The gap between an asset's straight-line net book value and its economic value; what a fair-value write-down would recognize.

Value-capture leakage; the 10–50:1 disconnect Savings realized by AI buyers that do not flow to the cloud meter — kept by the buyer, the integrator, or executed on-device.

Verification burden The human review that liability requires of AI output, which offsets generation savings.

Wattage chokepoint; the power slot The idea that a grid connection, not the silicon, is the scarce resource; an old accelerator is retired when a new one earns more per watt in the same slot.

What would change the distribution The specific observable outcomes that would move the paper's result decisively (Section 20); stated as tests on a distribution, not as a yes/no refutation.

Winners and losers; exposure hierarchy The paper's tables of who bears the deficit and who captures the surplus.

References

[1] Juniewicz, I. (2026). "Hyperscaler capex has quadrupled since GPT-4's release." Epoch AI Data Insight, Feb. 26, 2026. Quarterly capex (cash PP&E plus new finance-lease ROU assets) for Alphabet, Amazon, Meta, Microsoft and Oracle from SEC XBRL, Q1 2022–Q4 2025. CC-BY. https://epoch.ai/data-insights/hyperscaler-capex-trend; data: https://epoch.ai/data/charts/hyperscaler-capex-trend/stacked_hyperscalers_trend.csv. Accessed Sept. 8, 2026.

[2] MLQ News (2026). "Big Tech's 2026 Capex Range Reaches $720 Billion to $745 Billion," Aug. 2, 2026. Cites Amazon cash capex $48.1B / $77.7B / $128.3B (2023–25), Alphabet $32.3B / $52.5B / $91.4B, Meta $27.0B / $37.3B / $69.7B, and 2026 guidance. https://mlq.ai/news/big-techs-2026-capex-range-reaches-720-billion-to-745-billion/

[3] Statista (2026). "Big Tech's AI Spending to Reach $760 Billion in 2026," chart, Jul. 31, 2026, from Q2 2026 earnings guidance; 2025 comparison $413B. https://www.statista.com/chart/35046/capital-expenditure-of-meta-alphabet-amazon-and-microsoft/

[4] Patience, N. (2026). "AI Capex 2026: The $690B Infrastructure Sprint," Futurum Group, Feb. 12, 2026. https://futurumgroup.com/insights/ai-capex-2026-the-690b-infrastructure-sprint/

[5] Yahoo Finance (2026). "Meta, Microsoft, Amazon, and Alphabet are about to spend a shocking amount of money to dominate the AI era," Jun. 3, 2026 (Goldman Sachs $5.3T 2025–30 capex estimate). https://finance.yahoo.com/sectors/technology/article/meta-microsoft-amazon-and-alphabet-are-about-to-spend-a-shocking-amount-of-money-to-dominate-the-ai-era-115359575.html

[6] Yahoo Finance (2026). "Hyperscalers Hit $700 Billion in 2026 AI Spending Plans," Q1 2026 earnings coverage (Alphabet Q1 capex $35.67B; Google Cloud backlog >$460B; Microsoft AI run-rate >$37B). https://finance.yahoo.com/sectors/technology/articles/hyperscalers-hit-700-billion-2026-111243744.html[v]

[7] Trader Insights (2026). "Two Weeks That Rewired $200 Billion in AI Capital," Apr. 2026 (AWS AI run-rate >$15B; OpenAI $122B round). https://traderinsightsmedia.beehiiv.com/p/two-weeks-that-rewired-200-billion-in-ai-capital[v]

[8] NVIDIA Corporation (2026). "NVIDIA Announces Financial Results for Fourth Quarter and Fiscal 2026," Form 8-K exhibit, Feb. 25, 2026 (FY2026 revenue $215.9B; data-center $193.7B). https://www.sec.gov/Archives/edgar/data/1045810/000104581026000019/q4fy26pr.htm

[9] NVIDIA Corporation (2026). CFO Commentary on First Quarter Fiscal 2027 Results, Form 8-K exhibit (data-center revenue $75.2B; hyperscale ∼50%). https://www.sec.gov/Archives/edgar/data/0001045810/000104581026000051/q1fy27cfocommentary.htm

[10] Anthropic (2026). "Anthropic raises $30 billion Series G at $380 billion post-money valuation," Feb. 12, 2026 (run-rate revenue $14B). https://www.anthropic.com/news/anthropic-raises-30-billion-series-g-funding-380-billion-post-money-valuation

[11] TechCrunch (2026). "Anthropic's annualized revenue surges to $65B," Aug. 17, 2026, citing Bloomberg and the Financial Times (Anthropic $65B run-rate end-July from $9B end-2025; $65B round at $965B; OpenAI $40B). https://techcrunch.com/2026/08/17/anthropics-annualized-revenue-surges-to-65b/

[12] Axios (2026). "Anthropic's revenue run rate reportedly surpasses $65 billion pre-IPO," Aug. 17, 2026 (Q2 2026 revenue >$11.5B; Q1 $4.73B). https://www.axios.com/2026/08/17/anthropic-revenue-run-rate-ipo-openai

[13] Epoch AI (2026). *AI companies revenue reports* dataset (run-rate and booked revenue with source quotes: OpenAI $21.4B end-2025, "more than $40B" Aug. 2026; Anthropic $14B Feb. 2026; others). https://epoch.ai/data/ai_companies_revenue_reports.csv

[14] Epoch AI (2026). "Anthropic could surpass OpenAI in annualized revenue by mid-2026," Data Insight, Feb. 19, 2026 (growth rates; company-guided 2026 growth of ∼2.2× OpenAI, ≤4× Anthropic per The Information). https://epoch.ai/data-insights/anthropic-openai-revenue

[15] Epoch AI (2026). "Compute accounts for the majority of expenses of AI companies," Data Insight, Feb. 4, 2026. https://epoch.ai/data-insights/company-spending-breakdown

[16] ValueAdd VC (2026). "OpenAI Revenue 2026: $40B ARR as Anthropic Hits $65B," Sept. 2026 (OpenAI $122B round at $852B, Mar. 31, 2026; reported 2025 booked revenue $13.07B and operating loss $20.9B; confidential S-1 Jun. 8, 2026). Secondary source; figures attributed to leaked financials. https://valueaddvc.com/blog/openai-revenue-2026-20b-arr-4b-month-path-to-profitability[v]

[17] Adweek (2026). "Meta's Tepid Revenue Outlook Undercuts its AI Spending Spree," Jul. 29, 2026 (Q2 2026 call: Advantage+ end-to-end solutions above a $75B annual run-rate; AI ad matching yielding >8% more clicks and 15.7% more Facebook conversions). https://www.adweek.com/media/metas-tepid-revenue-outlook-undercuts-its-ai-spending-spree/

[18] Meta Platforms, Inc. (2026). Second Quarter 2026 Results, Jul. 29, 2026 (revenue $60.8B, +28%; ad impressions +14%, average price per ad +12%); Q1 2026 results (revenue $56.3B, +33%). https://investor.atmeta.com/; summarized in https://www.refontelearning.com/blog/meta-advantage-plus-explained and https://www.contentgrip.com/meta-ai-scaled-ad-engine-q1-2026/

[19] Sacra (2026). "Anthropic revenue, valuation & funding," updated Jul. 8, 2026 (gross-basis recognition of reseller revenue; ∼$45B run-rate May 2026 vs OpenAI ∼$33B; OpenAI Q1 2026 loss ∼$7B; Microsoft revenue share ∼$6B/yr). https://sacra.com/c/anthropic/

[20] Gartner (2026). *Forecast: Worldwide IT Spending*, 2026 updates (see [21, 22]).

[21] Gartner (2026). "Gartner Forecasts Worldwide IT Spending to Grow 10.8% in 2026, Totaling $6.15 Trillion," press release, Feb. 3, 2026 (software above $1.4T; GenAI model spending growth 80.8%; GenAI share of software up 1.8 points). https://www.gartner.com/en/newsroom/press-releases/2026-02-03-gartner-forecasts-worldwide-it-spending-to-grow-10-point-8-percent-in-2026-totaling-6-point-15-trillion-dollars

[22] Gartner (2026). "Gartner Forecasts Worldwide IT Spending to Grow 14.2% in 2026, Totaling $6.37 Trillion," press release, Jul. 27, 2026; segment detail (software $1.44T, IT services $1.87T, data center systems $788B) from the April update as reported by eeNews Europe. https://www.gartner.com/en/newsroom/press-releases/2026-07-27-gartner-forecasts-worldwide-it-spending-to-grow-14-point-2-percent-in-2026-totaling-6-point-37-trillion; https://www.eenewseurope.com/en/gartner-projects-it-spending-at-6-31-trillion-in-2026-on-ai-surge/

[23] Gartner (2026). "Gartner Forecasts Worldwide AI Platforms and Models Market to Grow 63% in 2026," press release, Jul. 20, 2026 (end-user spending $64B in 2026 from $39B in 2025). https://www.gartner.com/en/newsroom/press-releases/2026-07-20-gartner-forecasts-worldwide-ai-platforms-and-models-market-to-grow-63-percent-in-2026

[24] Gartner (2026). "Gartner Forecasts Worldwide AI Spending to Grow 47% in 2026" ($2.59T, of which more than 45% is vendor-built infrastructure), May 19, 2026. https://www.gartner.com/en/newsroom/press-releases/2026-05-19-gartner-forecasts-worldwide-ai-spending-to-grow-47-percent-in-2026

[25] Alphabet Q2 2026 earnings (Gemini app above 950M monthly active users) and Meta Q1 2026 earnings (Meta AI 1.2B monthly active users), as compiled in https://www.instantpress.co/ai-statistics[v]

[26] Microsoft Corporation (2026). FY2026 Q3 earnings call, Apr. 29, 2026 (S. Nadella: Microsoft 365 Microsoft 365 Copilot at 20 million paid enterprise seats, from 15 million at FY2026 Q2; customers with more than 50,000 seats quadrupled year over year; Accenture agreement for over 740,000 seats). Coverage: https://letsdatascience.com/news/microsoft-officeassistant-reaches-20-million-paid-enterprise-seats-eed5aec2; transcript at https://www.microsoft.com/en-us/investor/[v]

[27] Data Center Watch (2026). *Q1 2026 Report: Blocked and Delayed Data Center Projects*, covering January–March 2026 (at least 75 projects, ∼$130B; opposition groups more than doubled to 833 across 49 states; 300+ state bills; statewide moratoria proposed in 14 states). https://www.datacenterwatch.org/q1-2026; 2024–25 baseline report https://www.datacenterwatch.org/report

[28] Tom's Hardware (2026). "More than 75 data center build-outs worth $130 billion have been successfully blocked in the first three months of 2026," Jun. 13, 2026 (Ipsos: local opposition

∼70%). https://www.tomshardware.com/tech-industry/artificial-intelligence/more-than-75-data-center-build-outs-worth-usd130-billion-have-been-successfully-blocked-in-the-first-four-months-of-2026-bipartisan-opposition-mounts-nationwide-over-fears-of-soaring-power-and-water-costs

[29] Szczerba, R. (2026). "$130 Billion In AI Data Centers Stalled. The Bottleneck Is Consent," *Forbes*, Jul. 22, 2026. https://www.forbes.com/sites/robertszczerba/2026/07/22/130-billion-in-ai-data-centers-stalled-the-bottleneck-is-consent/

[30] Data Center Watch and Carbon Direct tracking, as reported Sept. 2026 (46 AI data-center projects, $137–172B, stalled, blocked or withdrawn Jan. 2024–May 2026; Tract's $14B Arizona withdrawal; QTS/Compass $24.7B Virginia litigation; New York halt on large facilities, Jul. 2026; cancellations 6 in 2024, 25 in 2025, 20+ in early 2026). https://cryptobriefing.com/us-data-center-projects-150b-stalled-cancelled/[v]

[31] MIT NANDA (2025). *The GenAI Divide: State of AI in Business 2025*, Jul. 2025 (about 95% of enterprise generative-AI pilots with no measurable P&L impact; gains concentrated in workflow-integrated deployments). https://nanda.media.mit.edu/[v]

[32] McKinsey & Company (2025). *The State of AI in 2025: Agents, Innovation, and Transformation*, Nov. 2025 (majority of firms using AI in at least one function; ∼1% describing deployments as mature). https://www.mckinsey.com/capabilities/quantumblack/our-insights/the-state-of-ai[v]

[33] Brynjolfsson, E., Li, D., & Raymond, L. (2025). "Generative AI at Work," *Quarterly Journal of Economics*, 140(2), 889–942 (14% average productivity gain for customer-support agents; 34% for the least experienced). https://doi.org/10.1093/qje/qjae044

[34] Cui, Z., Demirer, M., Jaffe, S., Musolff, L., Peng, S., & Salz, T. (2024). "The Effects of Generative AI on High-Skilled Work: Evidence from Three Field Experiments with Software Developers," SSRN 4945566 (26% more completed tasks). https://ssrn.com/abstract=4945566

[35] Dell'Acqua, F., McFowland, E., Mollick, E., et al. (2023). "Navigating the Jagged Technological Frontier," Harvard Business School Working Paper 24-013 (consultants with GPT-4: 12.2% more tasks, 25.1% faster, 40% higher quality inside the frontier). https://www.hbs.edu/faculty/Pages/item.aspx?num=64700

[36] Tech Insider (2026). "AI Agents Just Erased $2T in SaaS Value — Who Survives," Aug. 2026 (JPMorgan: largest non-recessionary 12-month software drawdown in 30+ years; IGV down 20–30% Feb.–Apr.; $285B in 48 hours on the Claude Cowork launch). https://tech-insider.org/saas-stock-crash-ai-agents-2-trillion-2026/

[37] NxCode (2026). "SaaSpocalypse 2026: Why AI Just Wiped $285B from Software," Feb. 5, 2026 (Bank of America's "internally inconsistent" objection: investors cannot believe both that AI capex fails and that AI disrupts all software). https://www.nxcode.io/resources/news/saaspocalypse-2026-software-stock-crash

[38] FinancialContent / MarketMinute (2026). "The SaaSpocalypse of 2026: How Generative AI Broke the Software Growth Engine," Mar. 30, 2026 (Atlassian -35% on first systemic seat-count decline; Adobe -36%; Salesforce -33%). https://markets.financialcontent.com/wral/article/marketminute-2026-3-30-the-saaspocalypse-of-2026-how-generative-ai-broke-the-software-growth-engine

[39] Arbisoft (2026). "The SaaSpocalypse and What Survives It," May 2026 (Gartner: 40% of enterprise applications with AI agents by end-2026, from under 5% in 2025). https://arbisoft.com/blogs/the-saa-spocalypse-and-what-survives-it

[40] Emmermann, V. (2026). "France Is Ditching Windows for Linux — And Every EU Business Should Pay Attention," Apr. 2026 (DINUM announcement of Apr. 8, 2026; Schleswig-Holstein's cabinet decision of Apr. 2024; Denmark; CNAM's 80,000-agent migration). https://blog.cierra.ai/blog/post/france-ditching-windows-linux-eu-digital-sovereignty?lang=en

[41] Tuta (2026). "Digital Sovereignty Study: EU IT leaders are quitting U.S. Big Tech," summarizing *State of Digital Sovereignty 2026* (1,818 IT decision-makers in Germany, France and the Nordics; 40% of German IT leaders actively implementing European software, from 20%; 87.5% favoring European products in critical infrastructure; the ICC prosecutor account incident). https://tuta.com/blog/digital-sovereignty-study[v]

[42] Windows Latest (2026). "Microsoft 365 just got a price hike over continuous innovation, but Copilot is the AI tax on businesses," Jul. 5, 2026 (increases up to 43% on some SKUs effective Jul. 1, 2026, announced Dec. 4, 2025; Security Copilot at 400 SCUs per 1,000 licenses bundled into E5). https://www.windowslatest.com/2026/07/05/microsoft-365-just-got-a-price-hike-over-continuous-innovation-but-copilot-is-the-ai-tax-on-businesses/

[43] US Cloud (2026). "Microsoft 365 Price Increase July 1, 2026: What Enterprise Buyers Need to Know," Jul. 2026 (E5/E7 packaging, Security Copilot capacity limits, renewal impact). https://www.uscloud.com/blog/microsoft-365-price-increase-july-1-2026-what-enterprise-buyers-need-to-know-part-1/

[44] Office Watch (2026). "Microsoft 365 Business Price Increase: Who Pays More in 2026," Jul. 8, 2026 (Windows Enterprise increase; "a chunk of that money is funding Copilot for a customer base that has consistently shown little interest"). https://office-watch.com/2026/microsoft-365-business-price-increase-2026/

[45] Mehta, V. (2026). Reviewer correspondence on version 24 of this paper, 29 September 2026: economic versus accounting depreciation of accelerators (80–90%/yr vs 20–30%/yr), inference utilization modeled at 40–50% and its possible doubling, and convergence of token prices to marginal cash cost; market context on neo-cloud short interest. Quoted with permission[v].

[46] Oracle Corporation (2026). Q1 fiscal 2027 results and earnings call, Sept. 10, 2026 (revenue $19.3B, +30%; OCI $7.4B, +121%; RPO $664B, +$26B q/q; GPU utilization 97.9%; 850 MW delivered in the quarter; FY26 capex $55.7B, free cash flow −$23.7B; ∼$40B financing planned for FY27). Transcript: https://www.fool.com/earnings/call-transcripts/2026/09/11/oracle-orcl-q1-2027-earnings-call-transcript/; summaries: https://finance.yahoo.com/markets/stocks/articles/oracle-corp-orcl-q1-2027-090101356.html

[47] MarketWise (2026). "Oracle Earnings: Watch Out for Massive OpenAI Risk Despite Blowout First Quarter," Sept. 2026 (OpenAI about half of RPO; CFO: new contracts "via prepay or bring your own hardware"; RPO not reaching revenue or capex until fiscal 2028 or beyond). https://marketwise.com/investing/oracle-earnings-openai-risk/

[48] Sacra (2026). "OpenAI revenue, valuation & funding," updated Jul. 29, 2026 and after (Q1 2026 revenue $5.7B, Q2 $6.7B; run-rate +35% quarter-to-date in mid-August, enterprise +50%; ads $1B annualized; Claude 56M MAU in Q2 2026; OpenRouter monthly token volumes 25.6T vs 8.8T). https://sacra.com/c/openai/

[49] AI Business Weekly (2026). "OpenAI Statistics 2026," Jul. 17, 2026 (ChatGPT 900M WAU Feb. 2026, 1B MAU Jun. 2026 per Reuters/Sensor Tower; 50M+ consumer subscribers; 9M+ paying business users; S-1 filed confidentially Jun. 8). https://aibusinessweekly.net/p/openai-statistics[v]

[50] Batch and caching price tiers: OpenAI Batch API and prompt caching; Anthropic Message Batches and prompt caching; Google Vertex AI batch prediction — lab pricing pages, Sept. 2026 (batch 50–75% off interactive rates, 24-hour windows; caching up to 90% off cached prefixes). Aggregator summaries consulted are listed in the repository's REFERENCES.md and are not cited here[v].

[51] Alphabet Inc. (2026). Second Quarter 2026 Results, Jul. 22, 2026 (revenue $119.8B, +24%; Google Cloud $24.8B, +82%, operating income $8.8B; cloud backlog $514B; capex $44.9B; 2026 capex guidance raised to $195–205B; free cash flow −$5.9B). Coverage: https://www.cnbc.com/2026/07/22/google-earnings-q2-goog-live-updates.html; https://www.metirai.com/blog/alphabet-q2-2026-earnings-google-cloud-ai-capex

[52] Digital Applied (2026). "AI Capex Scorecard: What Earnings Week Actually Showed," Aug. 2026 (Microsoft FY26 capex $115.9B, ∼$175B calendar-2026, >$50B Q1 FY27, Azure +43%, Copilot paid seats past 30M; Meta FY26 capex $130–145B; Amazon Q2 net sales $200.6B, no full-year capex guidance). https://www.digitalapplied.com/blog/ai-capex-scorecard-earnings-week-july-2026

[53] FutureX Capital (2026). "Q2 2026 Earnings: Big Tech's AI Capex Race Hits $730 Billion," Aug. 3, 2026 (quarterly capex GOOG $44.9B, MSFT $41B, AMZN $54.2B, META $31.08B; Amazon 2026 cash capex ∼$220B on memory prices; Meta $135–145B; AWS +37%). https://futurex.capital/en/ai-lab/reports/big-tech-ai-capex-2026q2

[54] Directions on Microsoft (2026). "Microsoft: Expect Capacity Constraints, CapEx Acceleration to Continue," Jul. 2026 (FY26 Q4 revenue $90B, Azure +43%, Azure past $100B annual, Q4 capex $41B, Q1 FY27 Azure guide up to 45%). https://www.directionsonmicrosoft.com/microsoft-expect-capacity-constraints-capex-acceleration-to-continue/

[55] Microsoft Corporation (2026). Form 8-K, Exhibit 99.1, FY2027 investor-metrics restatement (Microsoft 365 commercial cloud revenue growth 14–20%; Microsoft 365 commercial seat growth 6–7% year over year each quarter of FY2026; Azure growth 39–43%). https://www.sec.gov/Archives/edgar/data/0000789019/000119312526380280/d291965dex991.htm

[56] AI2.Work (2026). "Microsoft 365 Copilot Hits 30M Paid Seats, Backlog Tops $678B," Jul. 2026 (E7 bundling, July price increases and usage-based billing behind the seat jump; 6.5% penetration of ∼464M commercial seats; independent estimates of 20–30% weekly active use of assigned seats in some large deployments). https://ai2.work/blog/microsoft-365-copilot-hits-30m-paid-seats-backlog-tops-678b[v]

[57] WindowsForum (2026). "Microsoft 365 Copilot's 60 Million Seat Forecast: E7 Bundles, Pricing and Renewal Risks," Sept. 30, 2026 (seat series 15M/20M/30M; E7 general availability May 1, 2026; usage-based billing added in July; commercial seats +6%, revenue +17%). https://windowsforum.com/news/microsoft-365-copilots-60-million-seat-forecast-e7-bundles-pricing-and-renewal-risks.446453/

[58] The Motley Fool (2026). "Prediction: Microsoft Will Double Its Paid Copilot Seats in the Next 12 Months," Sept. 29, 2026 (30M seats on >450M commercial base growing ∼6%/yr; FY26 M365 commercial cloud revenue +17%, seats +6%; cost of revenue in the segment +12% on Copilot infrastructure). https://www.fool.com/investing/2026/09/29/prediction-microsoft-will-double-its-paid-copilot-seats-in-the-next-12-months/

[59] NextFin News via TMTPost (2026). "China's Tech Giants Pour Billions in AI Infrastructure in Q2," Sept. 2026 (Alibaba Q2 revenue RMB 269B, AI cloud and compute revenue RMB 48.4B +45%, adjusted profit −38%; Tencent capex RMB 52.8B, free cash flow −RMB 13.8B on RMB 51.4B compute prepayments; Baidu profit −68%; Chinese cloud ROIC 13–20% vs US 25–50%). https://www.tmtpost.com/8119172.html

[60] 36Kr (2026). "Alibaba and Tencent capex tops RMB 120 billion in one quarter," Sept. 2026 (Alibaba capex RMB 67.7B +75%, a quarter of revenue; Tencent RMB 52.8B +176%; Baidu capex 36% of revenue, free cash flow −RMB 7.95B). https://eu.36kr.com/en/p/3948069327591304

[61] TrendForce (2026). Top-nine cloud service provider capex forecast, revised May 2026 to ∼$830B (+79%); reported by Evertiq and iConnect007. https://evertiq.com/news/2026-05-06-ai-boom-pushes-hyperscaler-capex-towards-usd-830-billion-in-2026; https://iconnect007.com/article/149904/north-american-ai-data-center-expansion-drives-2026-capex-of-top-nine-csps-to-us830-billion/149901/aep

[62] Taiwan News (2026). "Taiwan IT makers to benefit as cloud giants' capex jumps 90%," Sept. 2026 (TrendForce: nine CSPs >$886.7B in 2026; Chinese four AI capex +80%; ByteDance leading). https://www.taiwannews.com.tw/en/news/6414153

[63] David, P. A. (1990). "The Dynamo and the Computer: An Historical Perspective on the Modern Productivity Paradox," *American Economic Review*, 80(2), 355–361. https://www.jstor.org/stable/2006600

[64] Jorgenson, D. W., Ho, M. S., & Stiroh, K. J. (2008). "A Retrospective Look at the U.S. Productivity Growth Resurgence," *Journal of Economic Perspectives*, 22(1), 3–24. https://doi.org/10.1257/jep.22.1.3

[65] Brynjolfsson, E., & Hitt, L. M. (2000). "Beyond Computation: Information Technology, Organizational Transformation and Business Performance," *Journal of Economic Perspectives*, 14(4), 23–48. https://doi.org/10.1257/jep.14.4.23

[66] U.S. Bureau of Labor Statistics. *Labor Productivity and Costs*, nonfarm business sector, historical series (annual growth ∼2.8% 1948–73, 1.4% 1973–95, 2.9% 1995–2004, 1.4% 2005–19). https://www.bls.gov/productivity/

[67] U.S. Census Bureau. *Business Trends and Outlook Survey*, AI supplement, 2025 (share of firms using AI to produce goods or services). https://www.census.gov/data/experimental-data-products/business-trends-and-outlook-survey.html[v]

[68] Andreessen Horowitz (2026). *State of Markets*, September 2026 (90 slides: hyperscaler capex consensus from S&P Capital IQ as of Sept. 18, 2026; J.P. Morgan capex and FCF series; BofA cycle comparison and ROIC; cloud backlogs; Silicon Data GPU rentals; OpenRouter token and spend shares; enterprise AI budget surveys; software fundamentals; Watten–Bistline–Blanford electricity study). Supplied to the author; https://a16z.com/

[69] Sheridan, E., Borges, G., Schneider, J., Vegliante, A., Fein-Ashley, J., Huang, E., Valenti, C., Hager, M., Zhang, S., and Makkar, A. (2026). "Americas Technology: Sizing the AI Economy Needed to Justify ROIC on Hyperscaler AI Capex," Goldman Sachs Global Investment Research, Equity Research, Sept. 24, 2026, 29 pp. (Phase-2 2026–27 AI capex $1.726T; $42.4B/GW; 70/30 compute/shell at 5/15-yr lives; $836M/GW-yr opex; 15% ROIC; $1.42T 2028–30 revenue, $11.6B/GW-yr; backlog $1.69T; semiconductor build 20/35/57 GW). Client research, not publicly linkable. Primary sell-side source.

[70] Constellation Energy (2024). "Constellation to Launch Crane Clean Energy Center, Restoring Jobs and Carbon-Free Power to The Grid," press release, Sept. 20, 2024 (20-year power purchase agreement with Microsoft); Talen Energy (2024–25), Susquehanna–Amazon Web Services data-center power arrangements; Constellation Energy (2025). "Constellation and Meta Sign 20-Year Agreement for Clinton Clean Energy Center," press release, Jun. 3, 2025. Company press releases; contract terms (take-or-pay structure, volumes) not fully disclosed[v].

[71] J.P. Morgan Asset Management (2026). *Guide to the Markets*, August 2026 (hyperscaler capex 2019–2028E: 71, 97, 131, 159, 154, 241, 416, 791, 1,066, 1,179 $B; hyperscaler free cash flow as % of sales), as reproduced in [68].

[72] Silicon Data (2026). GPU rental price index and inferred residual values, Sept. 7, 2026 (H100 $2.63, H200 $3.29, B200 $5.69, A100 $1.59 per GPU-hour), as reproduced in [68]. https://www.silicondata.com/[v]

[73] OpenRouter (2026). Token and spend share by model provider, Sept. 28, 2026 (Anthropic, Google and OpenAI ∼69% of spend on ∼35% of tokens; tokens up ∼600× over two years), as reproduced in [68]. https://openrouter.ai/rankings[v]

[74] Watten, S., Bistline, J., & Blanford, G. (2026). "Have Data Centers Raised Your Electric Bill?," Aug. 24, 2026 (each 10% increase in state data-center capacity associated with a ∼0.4% fall in average residential rates; 2019–24 capacity growth of 160% associated with rates ∼6% lower). As quoted in [68][v].

[75] Amazon.com, Inc. (2026). Form 10-K for fiscal 2025, Note 1: "Effective January 1, 2025 we changed our estimate of the useful lives of a subset of our servers and networking equipment from six years to five years. The shorter useful lives are due to the increased pace of technology development, particularly in the area of artificial intelligence and machine learning." Summarized with quantified effects in Hudson Labs, https://hudson-labs.com/research/amazon-server-depreciation-amzn; see also Usvyatsky, O., Deep Quarry, Feb. 11, 2025, https://deepquarry.substack.com/p/amazon-revises-server-lifespan-amid

[76] Hudson Labs (2025). "Server useful life: AMZN, META" (Meta extension to 5.5 years; FY2025 depreciation reduced $2.92B). https://www.hudson-labs.com/research/server-useful-life-amzn-meta

[77] Hudson Labs (2026). "MSFT server useful life" (4 to 6 years effective FY2023; 2–6 year range disclosed thereafter). https://www.hudson-labs.com/research/msft-server-useful-life

[78] Hudson Labs. "Accounting policy changes boost tech earnings" (Alphabet, Microsoft, Amazon, Oracle useful-life history 2020–2023). https://hudson-labs.com/blog/accounting-policy-changes-boost-tech-earnings

[79] JEDEC Solid State Technology Association. *JEP122H: Failure Mechanisms and Models for Semiconductor Devices*, 2016 (Arrhenius model; default activation energies by mechanism). https://www.jedec.org/standards-documents/docs/jep-122h

[80] Industry rule of thumb of failure-rate doubling per 10°C, derived from the Arrhenius relation at $E_a \approx 0.7$ eV over 50–100°C; discussed in ASHRAE TC 9.9, *Thermal Guidelines for Data Processing Environments*, 5th ed. (2021), and in vendor fresh-air-cooling studies (Dell, 2012)[v].

[81] Black, J. R. (1969). "Electromigration — A Brief Survey and Some Recent Results," *IEEE Transactions on Electron Devices*, 16(4), 338–347. https://doi.org/10.1109/T-ED.1969.16754

[82] Grattafiori, A., et al. (Meta, 2024). "The Llama 3 Herd of Models," Section 3.3.4 (Reliability and operational challenges: 419 unexpected interruptions over a 54-day snapshot on 16K H100s; 58.7% attributed to GPU issues). arXiv:2407.21783. https://arxiv.org/abs/2407.21783

[83] Financial Accounting Standards Board. *ASC 360-10, Property, Plant, and Equipment — Overall*, Subsections 35-17 to 35-35 (recoverability test on undiscounted cash flows; impairment measured at fair value). https://asc.fasb.org/

[84] Damodaran, A. (2026). "Cost of Capital by Sector (US)," January 2026 data update, Stern School of Business, NYU. https://pages.stern.nyu.edu/~adamodar/New_Home_Page/datafile/wacc.html

[85] Koller, T., Goedhart, M., & Wessels, D. (2020). *Valuation: Measuring and Managing the Value of Companies*, 7th ed. Wiley. ISBN 978-1-119-61088-5.

[86] Brealey, R. A., Myers, S. C., & Allen, F. (2023). *Principles of Corporate Finance*, 14th ed. McGraw-Hill. ISBN 978-1-265-07415-9.

[87] U.S. Bureau of Labor Statistics. *Occupational Employment and Wage Statistics*, May 2025. https://www.bls.gov/oes/[v]

[88] U.S. Bureau of Labor Statistics. *Employer Costs for Employee Compensation*, 2025. https://www.bls.gov/ecec/[v]

[89] U.S. Energy Information Administration. *Electric Power Monthly*, Table 5.6.A, average industrial price by state, 2024–2026. https://www.eia.gov/electricity/monthly/

[90] PJM Interconnection. *Interconnection Queue* and *2025 Long-Term Load Forecast Report*. https://www.pjm.com/planning/service-requests/interconnection-queues[v]

[91] Commission for Regulation of Utilities (Ireland). *CRU/21/124, Direction to the System Operators related to Data Centre grid connection processing*, Nov. 2021; EirGrid, *Shaping Our Electricity Future*. https://www.cru.ie/[v]

[92] Gemeente Amsterdam. *Vestigingsbeleid datacenters* (data-centre establishment policy, 2020) and subsequent grid-congestion notices from TenneT and Liander. https://www.amsterdam.nl/[v]

[93] Regulation (EU) 2016/679 (General Data Protection Regulation), Chapter V, Articles 44–50. https://eur-lex.europa.eu/eli/reg/2016/679/oj

[94] Regulation (EU) 2024/1689 (Artificial Intelligence Act). https://eur-lex.europa.eu/eli/reg/2024/1689/oj

[95] Government of India. *Digital Personal Data Protection Act, 2023*, No. 22 of 2023. https://www.meity.gov.in/

[96] CoreWeave, Inc. (2025). Form S-1 Registration Statement and subsequent Forms 10-Q (2025–2026), debt facilities and NVIDIA capacity arrangements. https://www.sec.gov/edgar/browse/?CIK=1769628

[97] Oracle Corporation. Form 10-Q, Q1 FY2026, remaining performance obligations. https://www.sec.gov/edgar/browse/?CIK=1341439

[98] CB Insights and PitchBook (2025–2026). AI venture funding and startup outcome datasets; cohort failure tracking for 2024–25 funded generative-AI companies. https://www.cbinsights.com/research/[v]

[99] GitHub (2025). *Octoverse 2025: The state of open source and AI*. https://github.blog/news-insights/octoverse/

[100] International Federation of Robotics (2025). *World Robotics 2025 — Industrial Robots*. https://ifr.org/worldrobotics/

[101] Fortune Business Insights (2026). *Autonomous Driving Software Market Size, Share & Industry Analysis, 2026–2034*. https://www.fortunebusinessinsights.com/[v]

[102] Research and Markets (2026). *AI-Powered Clinical Documentation Market: Global Report*. https://www.researchandmarkets.com/[v]

[103] Newzoo (2026). *Global Games Market Report 2026*. https://newzoo.com/resources/trend-reports[v]

[104] Cahn, D. (2024). "AI's $600B Question," Sequoia Capital, Jun. 20, 2024. https://www.sequoiacap.com/article/ais-600b-question/

[105] Goldman Sachs Global Investment Research (2024). "Gen AI: Too Much Spend, Too Little Benefit?," *Top of Mind*, Issue 129, Jun. 25, 2024 (interviews with J. Covello and D. Acemoglu). https://www.goldmansachs.com/insights/top-of-mind/gen-ai-too-much-spend-too-little-benefit

[106] Acemoglu, D. (2024). "The Simple Macroeconomics of AI," NBER Working Paper 32487. https://www.nber.org/papers/w32487

[107] Brynjolfsson, E., Rock, D., & Syverson, C. (2021). "The Productivity J-Curve: How Intangibles Complement General Purpose Technologies," *American Economic Journal: Macroeconomics*, 13(1), 333–372. https://doi.org/10.1257/mac.20180386

[108] Nordhaus, W. D. (2004). "Schumpeterian Profits in the American Economy: Theory and Measurement," NBER Working Paper 10433. https://www.nber.org/papers/w10433

[109] Solow, R. M. (1987). "We'd Better Watch Out," review of *Manufacturing Matters*, *New York Times Book Review*, Jul. 12, 1987, p. 36.

[110] Villalobos, P., Ho, A., Sevilla, J., Besiroglu, T., Heim, L., & Hobbhahn, M. (2024). "Will We Run Out of Data? Limits of LLM Scaling Based on Human-Generated Data," Epoch AI; arXiv:2211.04325v2. https://arxiv.org/abs/2211.04325

[111] Fermi, E. (1945). "My Observations During the Explosion at Trinity on July 16, 1945," Los Alamos National Laboratory archive. Reproduced at https://www.atomicarchive.com/resources/documents/trinity/fermi.html

[112] Katz, J. I. (2021). "Fermi at Trinity," *Nuclear Technology*, 207(sup1), S326–S329; arXiv:2103.05784. https://doi.org/10.1080/00295450.2021.1906623

[113] Morrison, P. (1963). "Fermi Questions," *American Journal of Physics*, 31(8), 626–627. https://doi.org/10.1119/1.1969701

[114] von Baeyer, H. C. (1993). *The Fermi Solution: Essays on Science*. Random House. ISBN 978-0-679-42020-3.

[115] Alphabet Inc. (2026). Third Quarter 2026 Results, Form 8-K Exhibit 99.1 and Form 10-Q, Oct. 28, 2026 (capex $51.4B; Google Cloud $30.7B, +103%; cloud backlog $560.8B; 2026 capex guidance $195–205B unchanged; CFO on the call: "we continue to expect our capex to increase significantly in 2027"). https://www.sec.gov/Archives/edgar/data/1652044/000165204426000080/googexhibit991q32026.htm; call coverage: https://www.fool.com/earnings/takeaways/2026/10/29/alphabet-3-key-takeaways-for-long-term-investors/

[116] CNBC (2026). "Alphabet tanks nearly 13% for worst day ever, losing $500 billion in value," Oct. 29, 2026. https://www.cnbc.com/2026/10/29/alphabet-google-microsoft-msft-shares-today-earnings.html

[117] Yahoo Finance (2026). "Alphabet loses $482 billion in market value, the biggest drop in its history," Oct. 29, 2026. https://finance.yahoo.com/markets/article/alphabet-heads-for-a-500-billion-drop-in-market-value-the-biggest-in-its-history-134824763.html

[118] Microsoft Corp. (2026). FY27 First Quarter Results, press release (Form 8-K Exhibit 99.1) and Form 10-Q, Oct. 28, 2026; earnings call (CFO: "Roughly 3/4 of our CapEx was for short-lived assets, primarily CPUs and GPUs"; capex and finance leases $45.2B; Q2 capex over $50B; Azure +48%; commercial RPO $677B). https://www.sec.gov/Archives/edgar/data/789019/000119312526436122/msft-ex99_1.htm; https://www.microsoft.com/en-us/investor/earnings/fy-2027-q1/press-release-webcast; transcript: https://www.tradingkey.com/news/transcripts/262249601-tradingkey

[119] CFO Dive (2026). "Microsoft holds line on AI spending plans," Jul. 30, 2026 (data-center and building useful lives extended from 15 to 25 years from FY27; new data-center leases classified as operating leases). https://www.cfodive.com/news/microsoft-holds-line-ai-spending-plans/826648/

[120] Amazon.com, Inc. (2026). Third Quarter 2026 Results, Form 8-K Exhibit 99.1, Oct. 29, 2026 (purchases of property and equipment $77.3B; 2026 cash capex "approximately $220 billion"; AWS $46.0B, +39%); call (Jassy: "spend meaningfully more in 2027"; AWS growth "over 40% both in 2027 and in 2028"; backlog $578B). https://www.sec.gov/Archives/edgar/data/1018724/000101872426000038/amzn-20260930xex991.htm; transcript: https://www.investing.com/news/transcripts/earnings-call-transcript-amazon-q3-2026-misses-eps-as-shares-fall-after-hours-93CH-4985489

[121] Meta Platforms, Inc. (2026). Third Quarter 2026 Results, Form 8-K Exhibit 99.1 and earnings call transcript, Oct. 21, 2026 (capex incl. finance-lease principal $34.9B; 2026 guidance $135–145B; "we expect to continue investing aggressively"). https://www.sec.gov/Archives/edgar/data/0001326801/000162828026066700/meta-09302026xexhibit991.htm; https://s21.q4cdn.com/399680738/files/content_files/META-Q3-2026-Earnings-Call-Transcript.pdf

[122] Oracle Corp. (2026). Investor Day presentation, Form 8-K Exhibit 99.1, Oct. 28, 2026 ("Following a period of peak capex in FY27-FY28, capital expenditures are expected to step-down in FY29"; positive free cash flow from second-half FY28). https://www.sec.gov/Archives/edgar/data/1341439/000119312526435853/d75538dex991.htm

[123] Anthropic, PBC (2026). Form S-1 Registration Statement, public filing Oct. 26, 2026 (six months to Jun. 30, 2026: revenue $16,286M vs $1,163M; operating loss $693M; change in fair value of convertible notes, derivative liabilities and SAFEs $72,388M; net loss $80,748M; full-year 2025 revenue $4,585M). https://www.sec.gov/Archives/edgar/data/0002130357/000162828026067168/anthropicpbc-sx1.htm

[124] CNBC (2026). "Anthropic's Q3 revenue is said to hit $16.8 billion ahead of IPO," Oct. 14, 2026 (people familiar; not a filing). Also FT via The Star: https://www.thestar.com.my/tech/tech-news/2026/10/15/anthropic-revenue-jumps-to-168-billion-in-third-quarter-ft-reports

[125] Dealroom (2026). "Anthropic's draft S-1 reveals $16.3B revenue, $80.7B loss and up to $750B compute bill," Oct. 21, 2026 (WSJ review of the draft: noncancelable commitments Google $111B, AWS $110B, Microsoft $31B). https://dealroom.co/news/164610-anthropics-draft-s-1-reveals-16-3b-revenue-80-7b-loss-and-up-to-750b-com/

[126] Bloomberg (2026). "Goldman Sees Hyperscaler AI Capex Rising 50% to $1.2 Trillion," Sept. 25, 2026 (Street 2027 ∼$1.1T; Goldman 2027 $1.2T, 2028 $1.4T). https://www.bloomberg.com/news/articles/2026-09-25/goldman-sees-hyperscaler-ai-capex-rising-50-to-1-2-trillion

[127] Yahoo Finance (2026). "Nasdaq Drops 365 Points on Alphabet's Rare Double Miss: Stock Market Today," Oct. 29, 2026 (EPS $2.67 vs $3.00 expected; revenue $127.6B vs $127.9B; search ad growth 12% vs 17% in Q2; long-term debt $125.1B vs $21.6B a year earlier; Wedbush: the search slowdown "outweighs all other points in the print"). https://finance.yahoo.com/markets/stocks/articles/nasdaq-drops-365-points-alphabets-200822565.html

[128] TechCrunch (2026). "xAI burned $6.4B last year — SpaceX's IPO filing shows why the spending is far from over," May 20, 2026 (AI segment capex $5.6B in 2024, $12.7B in 2025, $7.7B in Q1 2026; 2025 revenue $3.2B; Colossus I and II ∼1 GW). https://techcrunch.com/2026/05/20/xai-burned-6-4b-last-year-spacexs-ipo-filing-shows-why-the-spending-is-far-from-over/

[129] Baxtel (2026). "SpaceX's first earnings call was mostly a data center call," Aug. 5, 2026 (Q2 capex $18.4B, of which AI $15.8B; Anthropic $1.25B a month to May 2029 for Colossus 1; 1.4 GW, >2 GW by end-2026; CFO: "less than a one-year payback"; Musk: "closer to 10 GW than 5 GW" by end-2027). https://baxtel.com/posts/spacex-s-first-earnings-call-was-mostly-a-data-center-call

[130] investingLive (2026). "SpaceX beats Q3 forecasts across all three segments as AI revenue tops $7.5 billion," Oct. 20, 2026 (revenue $14.6B; AI segment ∼$7.6B; capex $19.6B, of which AI ∼$16.4B). https://investinglive.com/stocks/spacex-beats-q3-forecasts-across-all-three-segments-as-ai-revenue-tops-7-5-billion/

[131] Hargreaves Lansdown (2026). "SpaceX Q3 results: AI powers a big beat," Oct. 2026 ("Fourth-quarter capital expenditure should rise to $35–40bn"; AI revenue up "more than ninefold" on cloud deals and the Cursor acquisition). https://www.hl.co.uk/shares/share-research/spacex-q3-results-ai-powers-a-big-beat

[132] Basenor (2026). "SpaceX plans $35–40B Q4 capex," Oct. 2026 (Q4 capex "almost entirely" for compute; $40B of callable debt for GPUs arriving in Q1–Q2 2027). https://www.basenor.com/blogs/news/spacex-plans-35-40b-q4-capex-matches-teslas-last-4-years-combined

[133] Federal Open Market Committee (2026). "Statement on Longer-Run Goals and Monetary Policy Strategy" (inflation of 2 percent over the longer run, as measured by the PCE price index). https://www.federalreserve.gov/monetarypolicy/files/FOMC_LongerRunGoals.pdf

[134] US Bureau of Labor Statistics (2026). "Consumer Price Index — September 2026," released Oct. 14, 2026 (all items 3.7% over 12 months; all items less food and energy 2.6%). https://www.bls.gov/news.release/cpi.nr0.htm; figures as reported by Eco3min, "Next US CPI release" (read Oct. 30, 2026), https://eco3min.fr/en/next-us-cpi-release/